

# 2022

FIXTURE CATALOG



**sunlite**<sup>®</sup>

Providing All of Your Lighting Needs Since 1980

# ABOUT Us

For over 40 years Sunshine Lighting has been providing quality and affordable solutions to the lighting industry and has evolved into a multinational enterprise, growing at a rapid pace to become a leading lighting manufacturer in North America. Sunshine Lighting offers a wide array of products under multiple brands including MKS LED®, Ambiate® and Sunlite® lamps and luminaires. We take great pride in maintaining a personal relationship with each customer. Sunshine Lighting has gained a reputation for quality and affordability while keeping up with the latest technologies.

The Sunlite® brand was introduced in 1996 to provide select lighting technologies consisting of Indoor, Industrial and Outdoor LED and Non-LED fixtures, as well as LED, Compact Fluorescent, HID, Halogen, Decorative, Miniature, Specialty, Stage and Studio lamps. Our dedicated team of technical and product specialists ensures that our products designed with safety and the environment in mind. Most products carry the Underwriters Laboratories (UL), Intertek's ETL Listing, Department of Energy (DOE) Energy Star certifications, Design Lights Consortium (DLC) qualified products listing, and/or the American Lighting Association (ALA) among others.

Through customer interaction and feedback, we introduce new and innovative products to the marketplace as well as continually improving our existing line of items to meet the high expectations our customers have come to rely on us. In addition, we provide exclusive service to customers whether it's a product tweak, modification, or full custom product, Sunshine Lighting's dedicated engineering and project management team is ready assist.

***sunlite***®

Copyright ©2021 Sunlite

For Product inquiries or to place an order, please contact us at:

TOLL FREE PHONE: **800.605. BULB**

VISIT: **[www.sunlite.com](http://www.sunlite.com)**

For general information: **[info@sunlite.com](mailto:info@sunlite.com)**

Sales department: **[sales@sunlite.com](mailto:sales@sunlite.com)**

To Request a catalog: **[catalog@sunlite.com](mailto:catalog@sunlite.com)**

**NYC Warehouse**  
744 Clinton Street  
Brooklyn, NY 11231  
Tel: 718.768.7000  
Fax: 718.768.0970

# TABLE OF CONTENTS


Linear Ceiling Flush Mount	4-7
Linear Shop Light	8
Linear Bed Light	8
Under Cabinet Light	9
Ceiling Flat Panel & Kits	10
Recessed Troffer	11
Flat T-Grid Lighting System	11
Recessed Downlight	12 - 17
Pendant Fixture	18 - 25
Ceiling Flush Mount	25 - 38
Adjustable Track Light	39
Wall Mount Sconce	40 - 52
Outdoor Wall Sconce	54 - 67
Outdoor Gooseneck Fixture	68
Outdoor Security Flood Light	69
Outdoor Post Mounted Fixture	70-71
Outdoor Ceiling Flush Mount	72
Outdoor Bollard Garden Pathway Series	73
Outdoor Wall Mount Series	74 - 77
Outdoor Floodlight	77
Outdoor Pole-Top Area Light	78
Outdoor Parking Lot Area Light	79 - 80
Outdoor Parking Garage Canopy Light	80
Commercial High Bay	81 - 83
VaporProof Light	84
Construction Work Light Series	85
Construction String Lights	86
Emergency Lights	86
Exit Sign & Emergency Lights Combo	87
Exit Sign	88 - 89
Flush Mount Circular Module Retrofit Kit	90
Bezel Lights	91
LED Step Light	92
Replacement Lenses	93 - 94



## LED Linear Ceiling Flush Mount

### Linear Strip Light Fixture

Enhance any work area or utility room with Sunlite LED integrated wraparound strip fixture. Save on your energy bill by replacing your 4' fluorescent linear strip fixture with this esthetically pleasing LED fixture



Suspension Kit

#### Suspension Kit

85364-SU Suspension Kit

Metal & Acrylic Body  
White Lens  
White Finish  
82 CRI

#### Options

5  
Year  
Warranty



See Components list page for detail

#### Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2 Foot</b>								
HD02616-1	LFX/EC/2'/20W/MV/D/35K	20	2536	120-277	3500K	50000	DL,DIM,DLC	3.6(h) 3.3(w) 22.2(d)
HD02617-1	LFX/EC/2'/20W/MV/D/40K	20	2620	120-277	4000K	50000	DL,DIM,DLC	3.6(h) 3.3(w) 22.2(d)
<b>3 Foot</b>								
HD02619-1	LFX/EC/3'/25W/MV/D/35K	25	3225	120-277	3500K	50000	DL,DIM,DLC	3.6(h) 3.4(w) 37.0(d)
HD02620-1	LFX/EC/3'/25W/MV/D/40K	25	3250	120-277	4000K	50000	DL,DIM,DLC	3.6(h) 3.4(w) 37.0(d)
HD02621-1	LFX/EC/3'/25W/MV/D/50K	25	3334	120-277	5000K	50000	DL,DIM,DLC	3.6(h) 3.4(w) 37.0(d)
<b>4 Foot</b>								
HD02625-1	LFX/EC/4'/SCT/MW/D/MV	18/25/30	2484/3350/3900	120-277	35K/40K/50K	50000	DL,DIM,DLC	3.6(h) 3.3(w) 47.3(d)
85476-SU	LFX/EC/4'/25W/MV/D/35K	25	3250	120-277	3500K	50000	DL,DIM,DLC	3.6(h) 3.3(w) 47.3(d)
HD03114-1	LFX/EC/4'/25W/MV/D/40K	25	3250	120-277	4000K	50000	DL,DIM,DLC	3.6(h) 3.3(w) 47.3(d)
<b>4 Foot   High Output</b>								
HD02622-1	LFX/EC/4'/40W/MV/D/35K	40	5200	120-277	3500K	50000	DL,DIM,DLC	3.6(h) 3.3(w) 47.3(d)
HD02623-1	LFX/EC/4'/40W/MV/D/40K	40	5240	120-277	4000K	50000	DL,DIM,DLC	3.6(h) 3.3(w) 47.3(d)
<b>8 Foot</b>								
HD03168-1	LFX/EC/8'/SCT/MW/D/MV	38/46/54	5244/6164/7020	120-277	35K/40K/50K	50000	DL,DIM,DLC	3.6(h) 3.3(w) 94.2(d)
HD03167-1	LFX/EC/8'/75W/MV/D/40K	75	9750	120-277	4000K	50000	DL,DIM,DLC	3.3(h) 3.3(w) 94.2(d)
85484-SU	LFX/EC/8'/75W/MV/D/50K	75	9825	120-277	5000K	50000	DL,DIM,DLC	3.3(h) 3.3(w) 94.2(d)

## LED Linear Ceiling Flush Mount

### Slim Linear Strip Light Fixture



Metal & Plastic Body  
White Lens  
White Finish  
80 CRI

Options

3  
Year  
Warranty



See Components list page for detail

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2 Foot - 1 Light</b>								
85550-SU	LFX/ST/2FT/1L/10W/SCT	10	1150	120-277	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 24.0(d)
HD02395-1	LFX/ST/2FT/1L/11W/50K	11	1520	120-277	5000K	50000	DL,DIM,DLC	2.2(h) 1.8(w) 24.0(d)
<b>2 Foot - 2 Light (Emergency Backup Optional)</b>								
85552-SU	LFX/ST/2FT/2L/20W/SCT	20	2300	120-277	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 3.8(w) 24.0(d)
<b>4 Foot - 1 Light</b>								
85551-SU	LFX/ST/4FT/1L/20W/SCT	20	2300	120-277	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 48.0(d)
HD02399-1	LFX/ST/4FT/1L/15W/30K	15	1900	120-277	3000K	50000	DL,DIM,DLC	2.2(h) 1.8(w) 48.0(d)
HD02400-1	LFX/ST/4FT/1L/15W/40K	15	1950	120-277	4000K	50000	DL,DIM,DLC	2.2(h) 1.8(w) 48.0(d)
<b>4 Foot - 2 Light (Emergency Backup Optional)</b>								
HD03593-1	LFX/ST/4FT/2L/40W/SCT	40	4600	120-277	30K/40K/50K	50000	DL,DIM	2.4(h) 3.8(w) 48.0(d)
HD02403-1	LFX/ST/4FT/2L/30W/MV/30K	30	3850	120-277	3000K	50000	DL,DIM,DLC	2.2(h) 3.5(w) 48.0(d)

## LED Linear Ceiling Flush Mount

### Strip / Stairway



Metal & Acrylic Body  
White Lens  
White Finish  
80 CRI

Options

5  
Year  
Warranty



See Components list page for detail

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2 Foot</b>								
85463-SU	LFX/EC/2'/MW/4SCT	15/20/25	3250	120-277	30K/35K/40K/50K	50000	DL,DIM	2.4(h) 3.35(w) 23.6(d)
85464-SU	LFX/EC/2'/MW/4SCT/EM	15/20/25	3250	120-277	30K/35K/40K/50K	50000	DL,DIM	2.4(h) 3.35(w) 23.6(d)
85465-SU	LFX/EC/2'/MW/4SCT/BLS	15/20/25	3250	120-277	30K/35K/40K/50K	50000	DL,DIM	2.4(h) 3.35(w) 23.6(d)
85466-SU	LFX/EC/2'/MW/4SCT/EM/BLS	15/20/25	3250	120-277	30K/35K/40K/50K	50000	DL,DIM	2.4(h) 3.35(w) 23.6(d)
<b>4 Foot</b>								
85467-SU	LFX/EC/4'/MW/4SCT	25/30/40	5200	120-277	30K/35K/40K/50K	50000	DL,DIM	2.4(h) 3.4(w) 46.3(d)
85468-SU	LFX/EC/4'/MW/4SCT/EM	25/30/40	5200	120-277	30K/35K/40K/50K	50000	DL,DIM	2.4(h) 3.4(w) 46.3(d)
85469-SU	LFX/EC/4'/MW/4SCT/BLS	25/30/40	5200	120-277	30K/35K/40K/50K	50000	DL,DIM	2.4(h) 3.4(w) 46.3(d)
85473-SU	LFX/EC/4'/MW/4SCT/EM/BLS	25/30/40	5200	120-277	30K/35K/40K/50K	50000	DL,DIM	2.4(h) 3.4(w) 46.3(d)
<b>8 Foot</b>								
85475-SU	LFX/EC/8'/MW/4SCT	55/60/65	8450	120-277	30K/35K/40K/50K	50000	DL,DIM	2.4(h) 3.4(w) 93.9(d)

Sunlite's wraparound light fixtures feature a durable aluminum housing that facilitates a quick and easy installation process. These flush mount fixtures are perfect for ceiling and wall applications in a wide array of settings.

**Metal & Plastic Body**  
**Clear Lens**  
**White Finish**  
**80 CRI**

**Options**

5 Year Warranty | Battery Backup | Motion Sensor

*See Components list page for detail*

**Application**




**LED Linear Ceiling Flush Mount**  
**Premium Wrap Around**

**LED BUILT-IN**

SWITCH Color Selectable

SWITCH Power Selectable

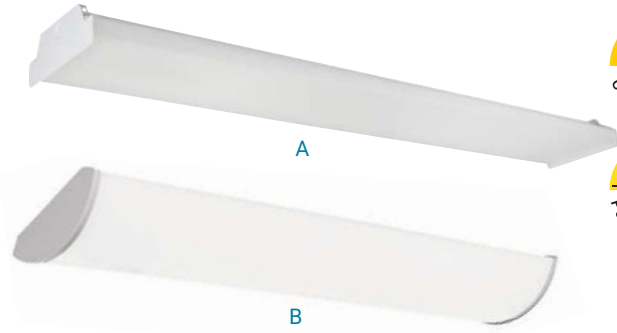

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A	85292-SU LFX/WA7'4'/MW/SCT	30/35/40	5000	120	35k/40K/50K	50000	DL,DIM,DLC	2.2(h) 7.0(w) 48.0(d)
B	HD03704-1 LFX/WA9'4'/40W/40K	40	5200	120	4000K	50000	DL,DIM	2.2(h) 9.7(w) 48.0(d)

The Sunlite 4 foot linear surface mount light fixtures are an energy efficient lighting solution. Designed for indoor installation. These easy to install fixtures have energy efficient LED technology built-in so there are no bulbs to replace. The Fixture can be mounted to any wall or ceiling junction box. High lumen output ideal for offices, task lighting, hallway and stairway lighting.

**Aluminum & Plastic Body**  
**White Lens**  
**White Finish**  
**80 CRI**

5 Year Warranty

**Application**



**LED Linear Ceiling Flush Mount**  
**Design Wrap Around**

**LED BUILT-IN**



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03705-1	LFX/WA5'4'/48W/40K	48	5520	120-277	4000K	50000	DL	2.5(h) 5.3(w) 48.0(d)

The Sunlite 4-Foot Vapor Proof Linear Fixture is an energy efficient, maintenance-free solution to your lighting needs. This fixture is IP65 rating, it can be installed in wet environments. Ideal for overhead task lighting, car washes, tunnels, stairwells, canopies, schools, hospitals, cold storage, parking, and garage lighting. This dimmable fixture features a durable frosted polycarbonate lens for even light distribution. It's UL Listed for wet location installation and DLC Listed for design and quality. Operates on 120-277 volt.

**Polycarbonate Body**  
**White Lens**  
**White Finish**  
**80 CRI**

**Options**

5 Year Warranty | Battery Backup | Motion Sensor

*See Components list page for detail*

**Application**



**LED Linear Ceiling Flush Mount**  
**Vapor Tight Strip**

**LED BUILT-IN**



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03147-1	LFX/VTS'4'/45W/MV/40K	45	5400	120-277	4000K	50000	WL,DIM,DLC	3.4(h) 5.0(w) 47.0(d)

## LED Linear Ceiling Flush / Wall Mount

### Stairway

Enhance any work area or utility room with Sunlite LED integrated wraparound strip fixture. Save on your energy bill by replacing your 4' fluorescent linear strip fixture with this esthetically pleasing LED fixture

LED  
BUILT-IN




Remote



Sensor

#### Components

85530-SU	Remote
97084-SU	Microwave Motion Sensor

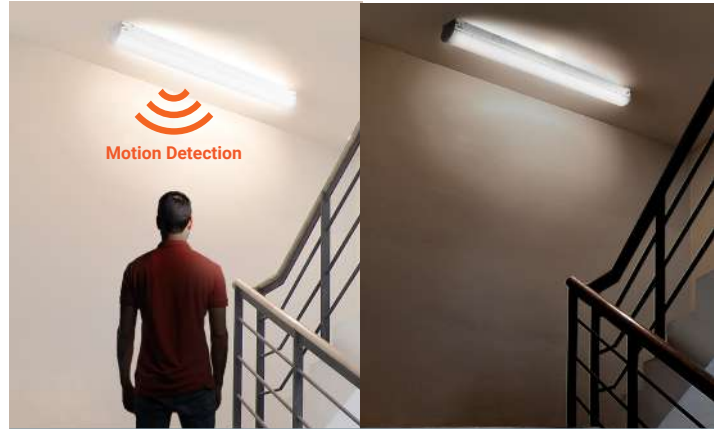

Steel & Acrylic Body  
White Lens  
White Finish  
82 CRI

#### Options



See Components list page for detail

#### Application




Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>Built-in 90-Min. Emergency Backup Battery   Bi-Level Sensor</b>								
HD03586-1	LFX/EC/4'/18W/MV/40K/EM/BLS	19	2300	120-277	4000K	50000	DL,DIM,DLC	3.8(h) 4.6(w) 48(d)
<b>Built-in Motion Sensor</b>								
HD03715-1	LFX/EC/4'/18W/MV/40K/BLS	19	2300	120-277	4000K	50000	DL,DIM,DLC	3.8(h) 4.6(w) 48(d)

## LED Linear Ceiling Flush / Wall Mount

### Stairway

LED  
BUILT-IN



These hard wired fixtures are simple to install on any junction box and include installation hardware. Durable steel and plastic construction. Integrated LEDs and a long 50,000 hour life span these fixtures will provide years of reliable and maintenance-free service. And unlike fluorescent tubes they are instant on at full brightness and contain no harmful chemicals. UL Listed for damp location installation. DLC Listed for quality and design. These indoor fixtures are ideal for residential or commercial installations in stairwells, corridors, storage areas, basements, garages, or anywhere extra lighting is needed.

Steel & Opal Lens Body  
White Lens  
White Finish  
80 CRI

#### Options



See Components list page for detail

#### Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2 Feet</b>								
HD02987-1	LFX/BB213/SCT/2FT/18W	18	2340	120-277	30K/40K/50K	50000	DL,DIM,DLC	3.8(h) 4.1(w) 23.9(d)
82090-SU	LFX/BB213/SCT/2FT/18W/EM	18	2340	120-277	30K/40K/50K	50000	DL,DIM	3.8(h) 4.1(w) 23.9(d)
<b>4 Feet</b>								
HD02988-1	LFX/BB213/SCT/4FT/36W	36	4680	120-277	30K/40K/50K	50000	DL,DIM,DLC	3.8(h) 4.1(w) 46.3(d)
HD03708-1	LFX/BB213/SCT/4FT/36W/EM	36	4680	120-277	30K/40K/50K	50000	DL,DIM	3.8(h) 4.1(w) 46.3(d)




Sunlite's shop light fixtures are an ideal solution for your utility lighting needs. These 48-in long shop lights feature pull chain on-off switching and a 5-foot grounded 3-prong outlet cord. Integrated LEDs with a life span of 50,000 hours make these a maintenance-free solution for years to come. They can be flush mounted or suspended from hooks and chains. The body is made from shatter resistant polycarbonate and has a white finish and cord. Output is cool white (4000K) at a bright 4000-5000 lumens with a 120 degree beam angle. Use for garages, workshops, basements, storage units, under cabinets, or anywhere extra lighting is needed. UL Listed.

Metal & Plastic Body  
White Lens  
White Finish  
80 CRI

5  
Year  
Warranty


Application

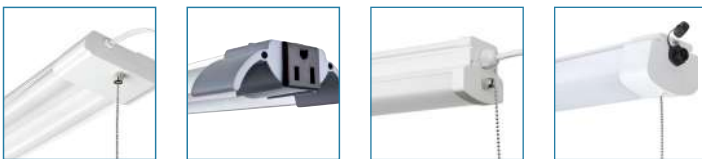

## LED Linear Shop Light

Chain Suspension

LED  
BUILT-IN

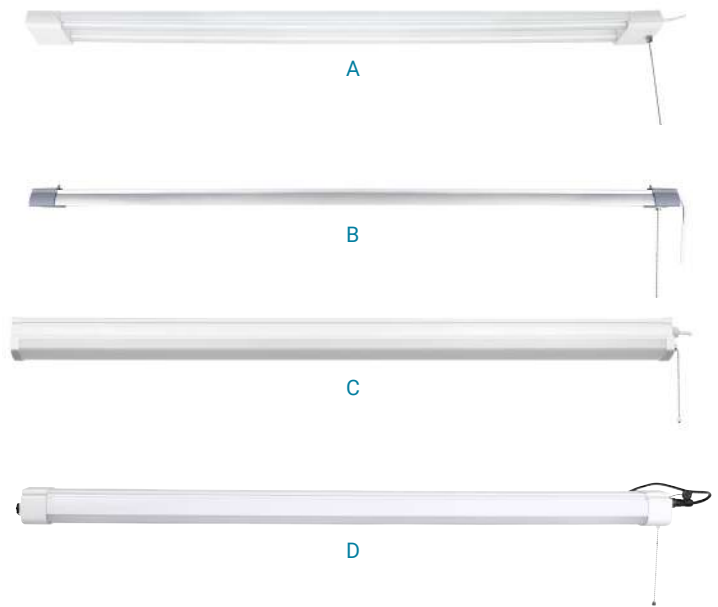

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b>	<b>Indoor</b> HD02627-1 LFX/SHOP/40W/E/40K	40	4000	120	4000K	50000	DL,ES	1.5(h) 5.0(w) 48.0(d)
<b>B</b>	<b>Indoor   Linkable</b> HD03549-1 LFX/SHOP/L/4'/42W/40K	42	4000	120	4000K	30000	DL,ES	1.5(h) 5.0(w) 48.0(d)
<b>C</b>	<b>Outdoor</b> HD02628-1 LFX/SHOP/37W/IP65/40K	37	4200	120	4000K	35000	WL	2.6(h) 3.3(w) 44.5(d)
<b>D</b>	<b>Outdoor   Linkable</b> 85319-SU LFX/SHOP/L/4'/50W/40K	50	5000	120	4000K	30000	WL	2.8(h) 3.3(w) 47.3(d)



Aluminum & Plastic Body  
White Lens  
White Finish  
80 CRI

Options

5  
Year  
Warranty

Battery Backup

See Components list page for detail

Application



## LED Linear Bed Light

Hospital Series

LED  
BUILT-IN

Sunlite Lighting's LED overbed lights are fabricated with your patient and medical staff in mind. This light bar creates a potent, but comfortable ENVIRONMENT that avoids disrupting others nearby, while providing enough light to read medical records, books and maneuver around during all hours in the day.



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02210-1	LFX/BL/22W-44W/30K	22/44	2100/4200	120-277	3000K	50000	DL,DIM,DLC	4.8(h) 5.7(w) 48.0(d)
HD02211-1	LFX/BL/20W-40W/40K	22/44	2300/4600	120	4000K	50000	DL,DIM,DLC	4.5(h) 4.8(w) 48.0(d)



## LED Under Cabinet

Linkable (Plug-In)



Sunlite Linkable LED Under Cabinet Fixtures are an energy efficient lighting solution for kitchens, bathrooms, offices, workbenches, and more. Fixtures can be linked together directly with built-in male/female connectors. Or use the included connector cord to space them further apart. Each fixture has an on/off switch so they can be operated independently and includes mounting hardware, and a 5-foot power cord that plugs into any standard 120 volt outlet.

Plastic Body  
White Lens  
White Finish  
80 CRI

2  
Year  
Warranty


Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>12" Length</b>								
HD03097-1	LFX/UC/12"/5W/SCT	5	500	120	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 12.3(d)
HD02296-1	LFX/UC/12/4W/30K	4	320	120	3000K	35000	DL	1.2(h) 0.9(w) 12.3(d)
HD02297-1	LFX/UC/12/4W/40K	4	320	120	4000K	35000	DL	1.2(h) 0.9(w) 12.3(d)
<b>22" Length</b>								
HD03098-1	LFX/UC/22"/9W/SCT	9	900	120	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 22.6(d)
HD03103-1	LFX/UC/22/8W/40K	8	640	120	4000K	35000	DL	1.2(h) 0.9(w) 22.6(d)
<b>34" Length</b>								
HD03099-1	LFX/UC/34"/12W/SCT	12	1200	120	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 34.4(d)
<b>46" Length</b>								
HD03101-1	LFX/UC/46"/16W/SCT	16	1600	120	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 46.2(d)
HD03106-1	LFX/UC/46/14W/30K	14	1120	120	3000K	35000	DL	1.2(h) 0.9(w) 46.2(d)

## LED Under Cabinet

Linkable (Hard Wire)

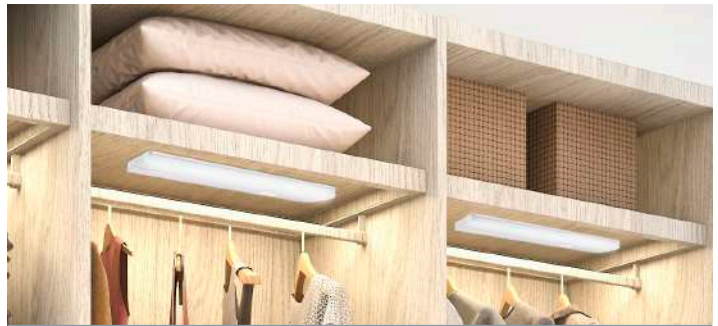

Metal & Acrylic Body  
White Lens  
White Finish  
90 CRI

5  
Year  
Warranty

Application



Connector
53075-SU Connector

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>6" Length</b>								
HD02582-1	LFX/UC/HW/6"/90CRI/30K/BK	6	300	120	3000K	50000	DL,DIM	1.0(h) 3.5(w) 6.0(d)
<b>12" Length</b>								
HD02581-1	LFX/UC/HW/12"/90CRI/30K/BK	8	400	120	3000K	50000	DL,DIM	1.0(h) 3.5(w) 12.0(d)
<b>18" Length   Color Selectable</b>								
HD03523-1	LFX/UC/10W/18"/90CRI/SCT/WH	10	600	120	30K/40K/50K	50000	DL,DIM	1.0(h) 3.7(w) 18.1(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**



## LED Ceiling Flat Panel & Kits

Backlit & Edge Lit



2' x 2'



1' x 4'



2' x 4'


Aluminum Body  
White Lens  
PMMA Optical Lens  
White Finish  
80 CRI

Options



See Components list page for detail

Application



PMMA Optical Lens Will Not Turn Yellow Over Time

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>Backlit</b>								
85539-SU	LFX/1X4/SCT/MW/SCT/4PK	20/30/40	2200/3300/4400	120-277	35K/40K/50K	50000	DL,DIM,DLC	1.4(h) 11.9(w) 23.8(d)
85543-SU	LFX/2X2/B-L/MW/SCT/4PK	20/30/40	2200/3300/4400	120-277	35K/40K/50K	50000	DL,DIM,DLC	1.4(h) 23.8(w) 23.8(d)
85544-SU	LFX/2X4/B-L/MW/SCT/4PK	30/40/50	3300/4400/5500	120-277	35K/40K/50K	50000	DL,DIM,DLC	1.4(h) 47.8(w) 23.8(d)
<b>Edge Lit</b>								
85462-SU	LFX/1X4/SCT/MW/D/MV/0-10V/2PK	20/30/40	4320/4600/4400	100-277	35K/40K/50K	50000	DL,DIM	0.4(h) 11.8(w) 47.8(d)
85390-SU	LFX/1X4/40W/30K/D/MV/0-10V/2PK	40	4000	100-277	3000K	50000	DL,DIM	0.4(h) 11.8(w) 47.8(d)
85374-SU	LFX/2X2/40W/65K/D/MV/0-10V/2PK	40	4400	100-277	6500K	50000	DL,DIM	0.4(h) 23.8(w) 23.8(d)
85380-SU	LFX/2X4/60W/30K/D/MV/0-10V/2PK	60	6000	100-277	3000K	50000	DL,DIM	0.4(h) 23.8(w) 47.8(d)
85388-SU	LFX/2X4/60W/50K/D/MV/0-10V/2PK	60	6000	100-277	5000K	50000	DL,DIM	0.4(h) 23.8(w) 47.8(d)

### Surface Mount

85146-SU	LFX/FLAT/1X4
85148-SU	LFX/FLAT/2X2
85149-SU	LFX/FLAT/2X4



Surface Mount

### Sheetrock Recessed Mounting

85087-SU	LFX/FLAT/1X4/RECESED
85090-SU	LFX/FLAT/2X2/RECESED
85091-SU	LFX/FLAT/2X4/RECESED



Recessed Mount

### Suspension Kit

85124-SU	LFX/FLAT/2X2/1X4
85129-SU	LFX/FLAT/2X4



Suspension Kit

### Battery Backup


88171-SU	12W 0.2-1.2A 10V-60VDC
----------	------------------------



Battery Backup

## LED Recessed Troffer

### Center Basket



Aluminum Body  
White Lens  
White Finish  
80 CRI

Options

5  
Year  
Warranty



See Components list page for detail

Application



#### Recessed Mounting

85138-SU	LFX/FLAT/2X2
85139-SU	LFX/FLAT/2X4




Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2X2 Option</b>								
HD03556-1	LFX/2X2/30W/D/MV/35K	30	3750	120-277	3500K	50000	DL,DIM,DLC	3.6(h) 24.0(w) 24.0(d)
<b>2X4 Option</b>								
85229-SU	LFX/2X4/55W/D/MV/40K	55	7040	120-277	4000K	50000	DL,DIM,DLC	48.0(h) 24.0(w) 2.8(d)
<b>Color Selectable</b>								
HD03589-1	LFX/2X2/SCT/MW/MV/D	20/25/30	2640/3250/3750	120-277	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 23.8(w) 23.8(d)
HD03557-1	LFX/2X4/SCT/MW/MV/D	25/30/34	3350/3900/4285	120-277	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 23.8(w) 47.8(d)


## LED Recessed Ceiling

### Flat T-Grid Lighting System

Sunlite's T-Grid Lighting System is an innovative lighting solution designed to replace 9/16" and 15/16" grid supports allowing seamless integration into your suspended drop ceiling. Create interesting and decorative designs with custom patterns such as an L-shape, T-shape, plus signs, outlined squares, and more.

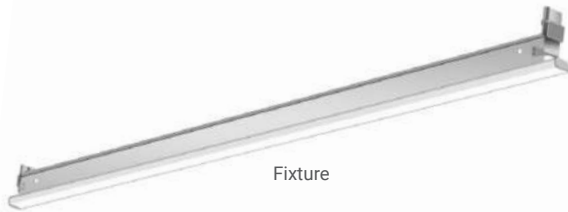

Fixture



- Examples of configurations
- Possible positions for T-grid LED light Modules
- One-Piece main runner cannot be replaced by light modules



Aluminum & Pc Body  
White Lens  
Matte Silver Finish  
80 CRI

5  
Year  
Warranty

Application



#### Drivers

88797-SU	TGRID/DRIVER/30W
88798-SU	TGRID/DRIVER/60W




Driver

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2 Foot</b>								
88786-SU	LFX/TGRID/2FT/D/10W/35K/14mm	10	1100	100-277	3500K	50000	DIM	24.0(h) 0.6(w) 0.5(d)
88789-SU	LFX/TGRID/2FT/D/10W/35K/24mm	10	1300	100-277	3500K	50000	DIM	24.0(h) 0.9(w) 0.5(d)
<b>4 Foot</b>								
88784-SU	LFX/TGRID/4FT/D/20W/30K/24mm	20	2400	100-277	3000K	50000	DIM	48.0(h) 0.6(w) 0.5(d)
88792-SU	LFX/TGRID/4FT/D/20W/35K/14mm	20	2400	100-277	3500K	50000	DIM	48.0(h) 0.6(w) 0.5(d)
88795-SU	LFX/TGRID/4FT/D/20W/35K/24mm	20	2600	100-277	3500K	50000	DIM	48.0(h) 0.9(w) 0.5(d)

# LED Recessed Remodel / New Construction Canless Downlight

## Ultra Slim Wafer Downlights

These ultra slim downlights from Sunlite feature innovative technology that provides down lighting without all the labor. Use for new installations or as a retrofit replacement for existing recessed lighting. Perfect for residential, commercial, retail, office, hospitality and educational institutions. These dimmable fixtures are instant on with no warmup time. And no flickering or buzzing like fluorescent bulbs. They are ETL Listed for damp location installation and Energy Star Certified.

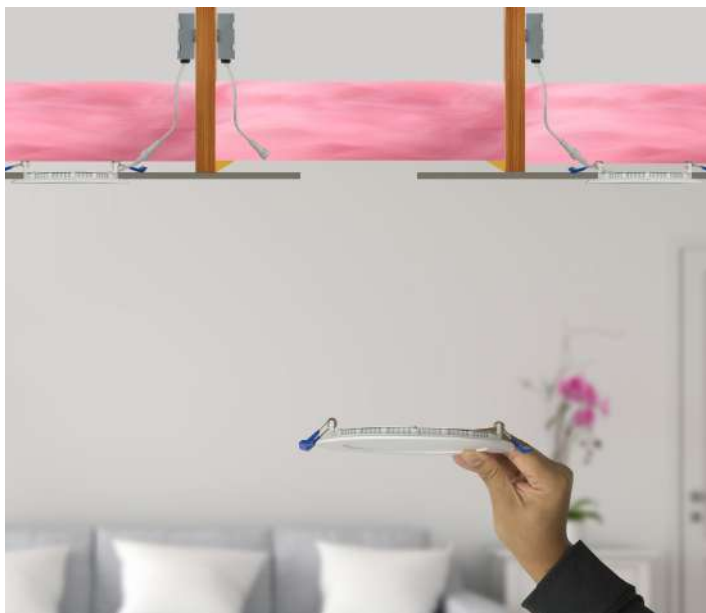


Aluminum & Acrylic Body  
White Lens  
White Finish  
80 / 90 CRI

5 Year Warranty | IC Rated

Application: Education, Hospitality, Office, Retail, Commercial, Residential



Mounting Option	
87705-SU	Construction Plate

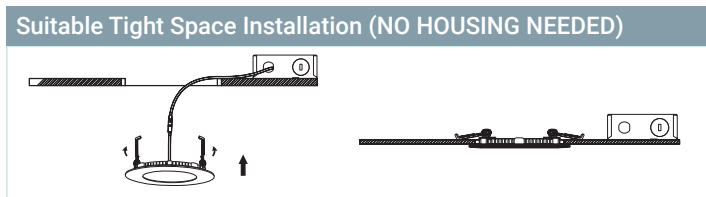

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A Round   Color Selectable   90 CRI</b>								
HD03709-1	LFX/SDL/4R/10W/SCT	10	700	120	27K/30K/35K/40K/50K	35000	DL,DIM,ES	1.0(h) 4.9(d)
HD03710-1	LFX/SDL/6R/12W/SCT	12	950	120	27K/30K/35K/40K/50K	35000	DL,DIM,ES	1.0(h) 6.8(d)
87722-SU	LFX/SDL/8R/19W/5SCT	19	1400	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	0.9(h) 8.9(d)
<b>B Round   80 CRI</b>								
HD03063-1	LFX/SDL/4R/10W/D/E/30K	10	650	120	3000K	36000	DL,DIM,ES	0.78(w) 4.8(d)
HD03078-1	LFX/SDL/6R/12W/D/E/30K	12	850	120	3000K	50000	DL,DIM,ES	0.87(h) 6.8(d)
<b>C Square   Color Selectable   90 CRI</b>								
HD03711-1	LFX/SDL/4S/10W/SCT	10	700	120	27K/30K/35K/40K/50K	35000	DL,DIM,ES	0.78(w) 4.8(d)
HD03712-1	LFX/SDL/6S/12W/SCT	12	950	120	27K/30K/35K/40K/50K	35000	DL,DIM,ES	0.87(h) 6.8(d)
<b>D Square   80 CRI</b>								
HD03076-1	LFX/SDL/4S/10W/D/E/50K	10	650	120	5000K	36000	DL,DIM,ES	0.8(h) 4.7(w)

# LED Recessed Remodel / New Construction Canless Downlight

## Regressed Anti-Glare

Sunlite's indirect slim downlights offer a glare free light fixture with an elegant design. The COB LED allows for flawless light distribution to evenly illuminate your space. COB LEDs provide indirect lighting with no hot /dark spots that's easier on the eyes. These dimmable indoor fixtures are designed for new installations or to replace existing recessed lighting cans. They have a white finish, die-cast heat sink and plastic trim. Two torsion springs secure the fixture in the existing opening and a junction box with a plug-in coupling adapter makes installation easy. 50,000 hour lifespan these fixtures will provide years of maintenance-free service in both commercial and residential applications. ETL Listed for damp location installations.



Round



Square



Aluminum & Acrylic Body  
White Lens  
White Finish  
90 CRI

5  
Year  
Warranty  
IC  
Rated

Application



Education



Hospitality



Office



Commercial



Residential



Typical Down Light



Regressed Anti-Glare


Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2" Round</b>								
85566-SU	LFX/DAD/2R/90CRI/8W/3SCT	8	600	120	30K/40K/50K	50000	DL,DIM	2.6(w) 3.2(d)
HD03272-1	LFX/DAD/2R/8W/40K	8	600	120	4000K	50000	DL,DIM	2.6(w) 3.2(d)
<b>2" Square</b>								
85567-SU	LFX/DAD/2S/90CRI/8W/3SCT	8	550	120	30K/40K/50K	35000	DL,DIM	2.3(h) 3.2(w) 3.2(d)
HD03276-1	LFX/DAD/2S/8W/30K	8	500	120	3000K	50000	DL,DIM	2.3(h) 3.2(w) 3.2(d)
HD03278-1	LFX/DAD/2S/8W/40K	8	500	120	4000K	50000	DL,DIM	2.3(h) 3.2(w) 3.2(d)
<b>4" Round</b>								
85564-SU	LFX/DAD/4R/90CRI/12W/3SCT	12	900	120	30K/40K/50K	35000	DL,DIM	x.x(w) x.x(d)
HD03283-1	LFX/DAD/4R/12W/40K	12	1000	120	4000K	50000	DL,DIM	3.0(w) 4.8(d)
<b>4" Square</b>								
85565-SU	LFX/DAD/4S/90CRI/12W/3SCT	12	900	120	30K/40K/50K	35 000	DL,DIM	x.x(w) x.x(w)



## LED Recessed Remodel / New Construction Canless Downlight

### ALLIE

The days of stocking many products to accommodate various color temperature options are over. Meet Allie! The All In One Downlight that you can stock with 3 built-in color temperatures.

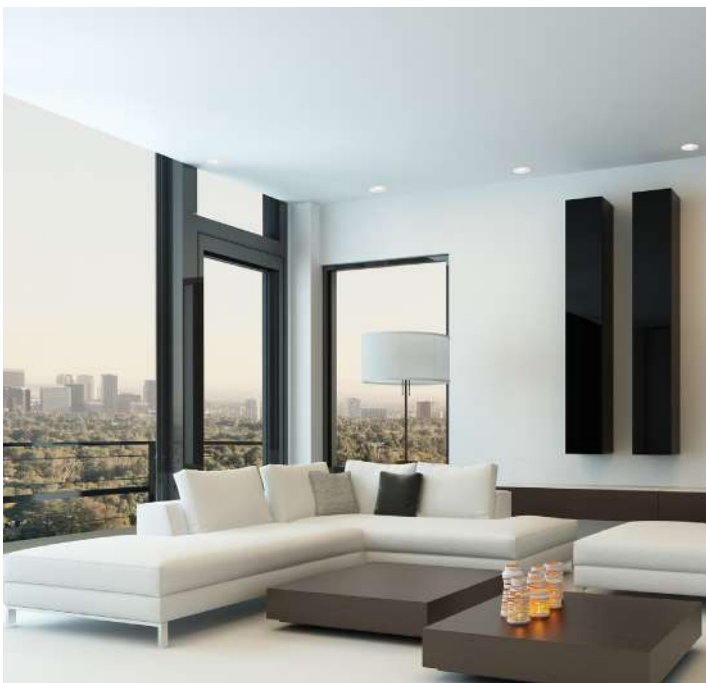

Aluminum Body  
White Lens  
White Finish  
80 CRI

Options



Application



A Canless Version



B



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A	87717-MKS MKS/MDL/ALLIE/4R/CCT	20	1500	120-277	30K/40K/55K	50000	DIM,ES	13.8 (h) 11.5(w) 4.0(d)
B	87713-MKS MKS/NDL/ALLIE/4R/CCT	20	1500	120-277	30K/40K/55K	50000	DIM,ES	13.8 (h) 11.5(w) 4.0(d)



**3000K (Warm White)**

Comforting & Restful  
provides for a relaxing atmosphere



**4000K (Cool White)**

Work Effectively  
perfect for all workspaces



**5000K (Super White)**

Invigorating  
great for commercial, displays, and reading

## LED Recessed Remodel / New Construction Canless Downlight

Gimbal & Eyeball



Steel Body  
Clear Lens  
White Finish  
80 / 90 CRI

3 Year Warranty  
IC Rated

Application



Item#	Description	Watt	Lumen	CRI	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b>	<b>Gimbal</b>								
82098-SU	LFX/GDL/3R/8W/5SCT	8	600	90	120	27K/30K/35K/40K/50K	50000	WL,DIM	1.8(w) 3.3(d)
<b>B</b>	<b>Eyeball</b>								
82083-SU	LFX/EDL/4R/12W/SCT	12	1000	80	120	27K/30K/35K/40K/50K	50000	WL,DIM,ES	1.7(w) 4.8(d)

## LED Recessed Remodel / New Construction Canless Downlight

Downlight Indirect Low Profile



Aluminum & Plastic Body  
White Lens  
White Finish  
80 CRI

3 Year Warranty  
IC Rated

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03094-1	LFX/IDL/6S/12W/D/30K	12	650	120	3000K	30000	DL,DIM	2.0(h) 6.8(w) 6.8(d)

## LED Recessed Gimbal Downlight Retrofit Kits

Gimbal Head



2-Axis Gimbal  
30° Tilt | 360° Rotation

Upgrade your indoor recessed can lighting with this energy efficient LED kit. These round retrofit lights are fully dimmable and simple for anyone to install with no electrician necessary. Medium base (E26) adapter screws directly into existing socket, connects to fixture, and the fixture slides directly into existing can. Gimbal design allows you to direct the light where you need it. They are ETL Listed for wet location installation

Aluminum Body  
Clear Lens  
White Finish  
90 CRI

5 Year Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b>	82080-SU	8	700	120	27K/30K/35K/40K/50K	50000	WL,DIM,ES	2.6(w) 5.0(d)
<b>B</b>	82084-SU	11	1100	120	27K/30K/35K/40K/50K	50000	WL,DIM,ES	2.9(w) 7.2(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**



Aluminum & Plastic Body  
White Lens  
White Finish  
90 CRI

5  
Year  
Warranty



## LED Recessed Downlight Retrofit Kits

### Round & Square Trim

Retrofit your space with our LED retrofit downlight kit. Developed utilizing the latest in LED technology, with a lifetime of 50,000 hours, it is sure to stand the test of time, it gives your space a warm ambience with a homey feel. UL listed for damp locations and others are wet location certified, it can be installed indoors or outdoors and will stand against the elements.



Baffle



Smooth



Color Selectable Switch

### Round Trim



3" Round



4" Round



5-6" Round

Item#	Description	Watt	Lumen	CRI	Volt	Color Temp	Hours	Features	Dimension(in)
<b>3" Round</b>									
HD02679-1	LFX/RDL/3R/10W/120V/D/E26/30K	10	600	90	120	3000K	50000	WL,DIM	2.5(w) 4.0(d)
<b>4" Round</b>									
HD03291-1	LFX/RDL/4R/10W/SCT	10	700	90	120	27K/30K/35K/40K/50K	35000	WL,DIM,ES	1.9(w) 5.5(d)
<b>4" Round   Baffle</b>									
87790-SU	LFX/RDL/BF/4R/10W/D/SCT	10	700	90	120	27K/30K/35K/40K/50K	35000	WL,DIM,ES	1.9(w) 5.5(d)
<b>5-6" Round</b>									
87793-SU	LFX/RDL/SCT/5/6R/14W	15	1100	90	120	27K/30K/35K/40K/50K	35000	WL,DIM,ES	1.9(w) 7.4(d)
<b>5-6" Round   Baffle</b>									
HD03293-1	LFX/RDL/SCT/BF/5/6R/14W	15	1100	90	120	27K/30K/35K/40K/50K	35000	WL,DIM,ES	1.9(w) 7.4(d)

### Square Trim



4" Square



4" Square Slim



5-6" Square

Item#	Description	Watt	Lumen	CRI	Volt	Color Temp	Hours	Features	Dimension(in)
<b>4" Square</b>									
89200-SU	LFX/RDL/4S/11W/SCT	11	750	90	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	3.2(h) 5.0(w)
HD02839-1	LFX/RDL/4S/10W/D/E/40K	10	700	80	120	4000K	50000	WL,DIM,ES	2.7(h) 4.9(w) 4.9(d)
HD02837-1	LFX/RDL/4S/10W/D/E/50K	10	700	80	120	5000K	50000	WL,DIM,ES	2.8(h) 4.9(w) 4.9(d)
<b>4" Square   Slim</b>									
HD02828-1	LFX/RDL/4S/9W/DIM/E/40K	9	630	80	120	4000K	50000	DL,DIM,ES	2.5(h) 5.0(w) 5.0(d)
<b>5-6" Square</b>									
HD03598-1	LFX/RDL/5/6S/14W/SCT	14	1100	90	120	27K/30K/35K/40K/50K	50000	WL,DIM,ES	3.6 (h) 7.3(w) 7.3(d)

## LED Recessed Commercial Retrofit Downlight

### Recessed Clip On Installation



Replace your 6-inch round recessed can lighting with these commercial grade, high-output LED fixtures from Sunlite. The aluminum body features a white finish and wires directly into your existing junction box. They are dimmable (100%-10%) and employ spring loaded tabs for easy installation into your existing light openings. ETL Listed for damp location installation. With no bulbs to replace and long 50,000 hour life span these are the perfect no-maintenance solution. Ideal for showrooms, retail locations, ballrooms, meeting spaces, atriums, entryways, hallways, or anywhere bright down lighting is needed.

Aluminum & PC Body  
White Lens  
White Finish  
80 CRI

#### Options



#### Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>Color Selectable</b>								
HD02666-1	LFX/CRD/SCT/6R/MW/D/6"	9/13/19	750/1050/1500	120-277	30K/35K/40K	50000	WL,DIM,ES	4.5(w) 8.4(d)
HD02667-1	LFX/CRD/SCT/8R/MW/D/8"	16/23/29	1500/2000/2500	120-277	30K/35K/40K	50000	WL,DIM,ES	4.8(w) 10.0(d)
HD02668-1	LFX/CRD/SCT/10R/MW/D/10"	21/29/37	2000/2500/3200	120-277	30K/35K/40K	50000	WL,DIM,ES	5.2(w) 11.4(d)
<b>Emergency Backup Compatible</b>								
87735-SU	LFX/CRD/SCT/6R/22W/6"/EM	22	2000	120-277	30K/35K/40K/50K	50000	WL,DIM,ES	4.5(w) 7.0(d)
87736-SU	LFX/CRD/SCT/8R/33W/8"/EM	33	3000	120-277	30K/35K/40K/50K	50000	WL,DIM,ES	5.2(w) 10.0(d)
87737-SU	LFX/CRD/SCT/8R/55W/8"/EM	55	5000	120-277	30K/35K/40K/50K	50000	WL,DIM,ES	5.7(w) 10.0(d)

## LED Recessed New Construction J-Box Downlight

### Recessed Clip On Installation



Aluminum & Plastic Body  
White Lens  
White Finish  
80 CRI



#### Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>4" Round</b>								
HD02904-1	LFX/JDL/BF/4R/10W/E/D/30K	10	600	120	3000K	50000	WL,DIM,ES	3.7(w) 5.0(d)
HD02905-1	LFX/JDL/BF/4R/10W/E/D/40K	10	630	120	4000K	50000	WL,DIM,ES	3.7(w) 5.0(d)
<b>6" Round</b>								
HD02906-1	LFX/JDL/BF/6R/15W/E/D/30K	15	1000	120	3000K	50000	WL,DIM,ES	3.0(w) 7.3(d)
HD02907-1	LFX/JDL/BF/6R/15W/E/D/40K	15	1020	120	4000K	50000	WL,DIM,ES	3.0(w) 7.3(d)



Metal Canopy  
Decorative Glass Finish  
81 CRI

5  
Year  
Warranty

Application



## LED Pendant Fixture

Glass Shade

LED  
BUILT-IN

The Sunlite Designers Glass LED Pendant collection features exquisite designs. Each pendant is meticulously crafted to provide high quality lighting. Every pendant features a unique stunning design that complements any room's interior. The pendants seamlessly integrate the latest and most efficient energy saving LED technology.



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A	HD03138-1 LFX/DSG/PD/D/9W/AMSTERDAM	9	800	120	3000K	35000	DL,DIM	11.0(w) 4.8(d)
B	HD03139-1 LFX/DSG/PD/D/9W/BRUSSELS	9	800	120	3000K	35000	DL,DIM	11.0(w) 4.8(d)
C	HD03141-1 LFX/DSG/PD/D/9W/JUNEAU	9	800	120	3000K	35000	DL,DIM	11.0(w) 4.8(d)
D	88706-SU LFX/DSG/PD/D/9W/TOKYO	9	800	120	3000K	35000	DL,DIM	11.0(w) 4.8(d)
E	HD02334-1 LFX/DSG/PD/D/9W/VENICE	9	800	120	3000K	35000	DL,DIM	9.0(w) 4.8(d)

Wood & Metal Body  
White Lens  
Brushed Nickel Finish  
81 CRI

3  
Year  
Warranty

Application



## LED Pendant Fixture

Wood Shade

LED  
BUILT-IN



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03122-1	LFX/WC/PD/25W/S/SCT	25	1500	120	30K/40K/50K	50000	DL,DIM	7.0(w) 20.0(d)

## LED Pendant Fixture

Industrial Style

**LED**  
BUILT-IN



The Sunlite LED Utility Ceiling Shade Fixture is constructed from iron. Its industrial style combines the look of yesteryear with the modern day LED technology of today, fusing the past and the present to bring you the ultimate in design and style. It serves as a visual sensation in any application it's installed in and complements the room decor. Built to last 35,000 hours, the pendant fixture will stand the test of time.

Metal Body  
Cage Lens  
Black Finish  
81 CRI

**5**  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03137-1	LFX/CS/WH/D/30K	15	900	120	3000K	35000	DL,DIM	9.0(w) 12.2(d)

## Pendant Fixture

Industrial Style

**BULB**  
REQUIRED




Metal Body  
120 volts  
Medium (E26) Base  
Uses S19 Bulb(s)  
Bulb Not Included

Bulb Suggestion



Application

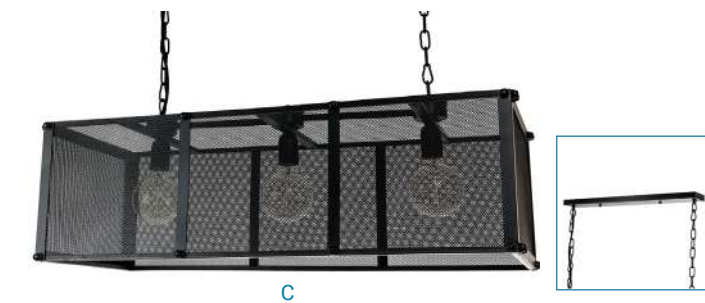

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD03487-1	AQF/IS/2PD/MB	Matte Black	-	2	60	33.7(h) 10.8(w) 31.1(d) 29 Cord
<b>B</b> HD03490-1	AQF/IS/1PD/MB	Matte Black	-	1	60	46.3(w) 13.7(d) 50 Cord
<b>C</b> 07078-SU	AQF/NC/PD/R	Black	-	3	60	11.0(h) 12.8(w) 32.5(d) 48 Cord

120 volts  
Medium (E26) Base  
Metal Body  
Bulbs Not Included

Bulb Suggestion



Application



Pendant Fixture  
Antique Style

**BULB**  
REQUIRED



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD03484-1	AQF/PD/CN8/AB	Antique Bronze	-	1	60	6.5(w) 8.0(d) 48 Cord
HD02357-1	AQF/PD/CN10/AB	Antique Bronze	-	1	60	6.5(w) 10.0(d) 48 Cord
<b>B</b> HD02672-1	AQF/PD/CN10/AB/FLA	Antique Brass	-	1	40	4.5(w) 10.5(d)
<b>C</b> HD02692-1	AQF/PD/SCN10/OB/AB	Antique Bronze	-	1	60	6.3(w) 10.0(d) 72 Cord



A



B



E



F



C



D



G



I


Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD03486-1	AQF/GPD/PR/AB	Antique Bronze	-	1	60	17.0(w) 15.0(d) 48 Cord
<b>B</b> 07062-SU	AQF/GPD/AC/AB	Black	-	1	60	16.3(w) 8.0(d) 46 Cord
<b>C</b> HD02687-1	AQF/PD/HEX/AB	Antique Bronze	-	1	60	9.5(w) 6.9(d) 72 Cord
<b>D</b> HD02686-1	AQF/PD/CGC/IR	Iron Rust	-	1	60	10.6(w) 5.7(d) 42 Cord
<b>E</b> HD02356-1	AQF/PD/CN10/CG/OB	Oil Black	Clear Glass	1	60	11.5(w) 10.7(d) 68 Cord
<b>F</b> HD02355-1	AQF/PD/OCG/OB/CB	Vintage Oil Bronze	-	1	60	11.8(w) 6.5(d) 42 Cord
<b>G</b> HD02353-1	AQF/PD/CG/OB	Vintage Oil Bronze	-	1	40	8.3(w) 4.3(d) 72 Cord
<b>I</b> HD02354-1	AQF/PD/CG/WH	White	-	1	40	8.3(w) 4.3(d) 72 Cord



# Pendant Fixture

Tinted Glass

**BULB**  
REQUIRED

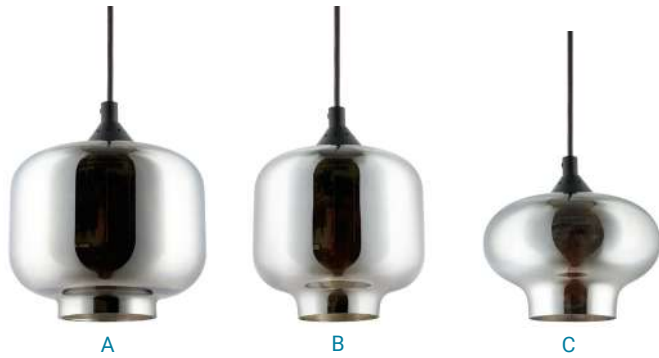

120 volts  
Medium (E26) Base  
Glass Body  
UL Listed  
Bulb Not Included

Bulb Suggestion



A19  
Med E26

Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02673-1	TG/PD/SP/9	Brushed Nickel	Tinted Glass	1	60	9.6(w) 8.3(d) 72 Cord
<b>B</b> HD02674-1	TG/PD/SP/6.5	Brushed Nickel	Tinted Glass	1	60	7.0(w) 6.9(d) 72 Cord
<b>C</b> 07024-SU	TG/PD/SP/7	Brushed Nickel	Tinted Glass	1	60	7.6(w) 5.5(d) 72 Cord

# Clear Glass



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD03485-1	AQF/CG/PD/CYL	Black	Clear Glass	1	60	9.0(w) 5.9(d) 70 Cord
<b>B</b> HD03488-1	AQF/CG/PD/SG	Black	Clear Glass	1	60	10.5(w) 10.0(d) 73 Cord
<b>C</b> HD03489-1	AQF/CG/PD/VCYL	Black	Clear Glass	1	60	11.6(w) 7.0(d) 50 Cord
<b>D</b> HD03483-1	AQF/PD/CN/CB/CAC	Copper Bronze	Clear Acrylic	1	60	9.4(w) 5.7(d) 71 Cord
<b>E</b> HD02819-1	AQF/CG/PD/TCYL	Black	Clear Glass	1	60	12.0(w) 9.6(d) 49 Cord

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**



120 volts  
Medium (E26) Base  
Metal Body  
Bulb Not Included

**Bulb Suggestion**

A19 Med E26      T10 Med E26


**Application**

Hospitality   Office   Retail   Commercial   Residential

## Pendant Fixture

Decorative

**BULB  
REQUIRED**

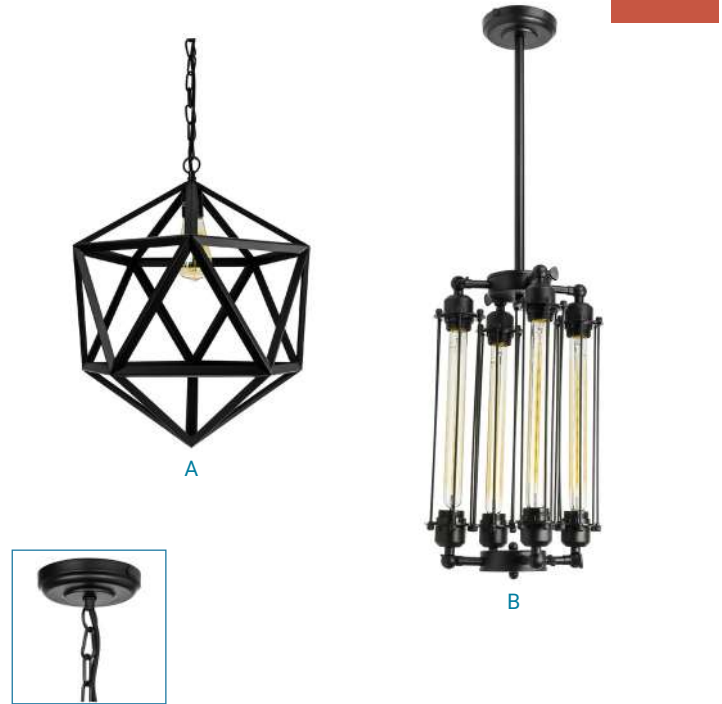

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
A	HD02671-1    AQF/GPD/DS/MB	Matt Black	-	1	60	22.0(h) 20.4(w) 20.4(d) 51 Cord
B	HD02688-1    AQF/4TPD/AB	Antique Black	-	4	60	34.5(h) 8.0(w) 8.0(d) 65 Cord

120 volts  
Medium (E26) Base  
Metal & Fabric Body  
Bulb Not Included

**Bulb Suggestion**

S19 Med E26

**Application**

Hospitality   Office   Retail   Commercial   Residential

## Pendant Fixture

Viking Style

**BULB  
REQUIRED**



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
A	HD02917-1    AQF/PD/VS/AB	Antique Bronze	-	6	60	25.0(h) 24.0(w) 24.0(d) 17 Cord
B	HD02918-1    AQF/RPD/VS/AB	Antique Bronze	-	3	60	22.0(h) 21.0(w) 21.0(d) 28 Cord



## Pendant Fixture

Globe Style

**BULB**  
REQUIRED

120 volts  
Medium (E26) Base  
Metal Body  
ETL Listed  
Bulb Not Included

Bulb Suggestion



Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)w
<b>A</b> 46058-SU	FIX/PRS/E26/BK	Matte Black	-	1	60	52 (h) 8 (d)
<b>B</b> HD03481-1	FIX/PRS/E26/BN	Brushed Nickel	-	1	60	52 (h) 8 (d)
<b>C</b> 90162-SU	FIX/1LT/BK-AB/E26	Black & Brass	-	1	60	72.0(h) 6.0(d)

## Pendant Fixture

Black and Copper

**BULB**  
REQUIRED

120 volts  
Medium (E26) Base  
Metal Body  
UL Listed  
Bulb Not Included

Bulb Suggestion



Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02915-1	PD/IC/14	Matte Black	-	1	60	8.5(w) 14.3(d) 78 Cord
<b>B</b> HD02916-1	PD/IC/7	Matte Black	-	1	60	16.0(w) 7.3(d) 74 Cord

120 volts  
Max 60 Watts  
Medium (E26) Base  
Metal Body  
UL Listed - Dry Location  
Bulb Not Included

Bulb Suggestion



Application

Item#	Description	Finish	Lights	Dimension(in)
<b>A</b> Sona				
HD03495-1	CF/PD/S/R	Red	1	7.1(w) 11.5(d) 48 Cord
HD03493-1	CF/PD/S/BB	Baby Blue	1	7.1(w) 11.5(d) 48 Cord
HD03494-1	CF/PD/S/M	Mint	1	7.1(w) 11.5(d) 48 Cord
<b>B</b> Vega				
HD03501-1	CF/PD/V/B	Blue	1	5.3(w) 12.0(d) 48 Cord
HD03499-1	CF/PD/V/BB	Baby Blue	1	5.3(w) 12.0(d) 48 Cord
<b>C</b> Zed				
HD03507-1	CF/PD/Z/R	Red	1	10.0(w) 10.0(d) 48 Cord
HD03503-1	CF/PD/Z/B	Blue	1	10.0(w) 10.0(d) 48 Cord
HD03506-1	CF/PD/Z/P	Pink	1	10.0(w) 10.0(d) 48 Cord
HD03502-1	CF/PD/Z/BB	Baby Blue	1	10.0(w) 10.0(d) 48 Cord
HD03504-1	CF/PD/Z/M	Mint	1	10.0(w) 10.0(d) 48 Cord
<b>D</b> Nova				
HD03492-1	CF/PD/N/P	Pink	1	7.6(w) 16.0(d) 48 Cord
HD03491-1	CF/PD/N/BB	Baby Blue	1	7.6(w) 16.0(d) 48 Cord

Pendant Fixture

Colored Canopy

**BULB**  
REQUIRED



A  
Sona



B  
Vega



C  
Zed



D  
Nova



Yellow Red Blue Pink Baby Blue Mint

120 volts  
Medium (E26) Base  
Plastic Body  
Only Lamp holder  
42" Cord

Bulb Suggestion



Application

Colored Canopy

Nova



A



B



C



Blue UFO Pendant  
Fixture Light Bulbs



Pink UFO Pendant  
Fixture Light Bulbs

Item#	Description	Lumen	MOL(in)	Item#	Description	Lumen	MOL(in)
HD03521-1	UFO/LED/7W/30K/BLUE	550	2.6	HD03522-1	UFO/LED/7W/30K/PINK	550	2.6
HD03583-1	UFO/LED/11W/30K/BLUE	800	2.6	HD03584-1	UFO/LED/11W/30K/PINK	800	2.6
HD03581-1	UFO/LED/15W/30K/BLUE	1250	3	HD03582-1	UFO/LED/15W/30K/PINK	1250	3

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD03496-1	CO/PD/BL	Blue	-	1	40	4.0(w) 1.8(d)
<b>B</b> HD03497-1	CO/PD/PK	Pink	-	1	40	4.0(w) 1.8(d)
<b>C</b> HD03498-1	CO/PD/WH	White	-	1	40	4.0(w) 1.8(d)

# Pendant Fixture

Socket

**BULB**  
REQUIRED



A



B



C



D



E



I



120 volts  
Medium (E26) Base  
Metal Body  
UL Listed  
Bulb Not Included

Bulb Suggestion



A19  
Med E26

Application



Hospitality



Office



Retail



Commercial



Residential



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
A	HD02349-1 AQF/PD/S1/BB	Matte Antique Bronze	-	1	60	4.2(w) 1.8(d) 72 Cord
B	HD02351-1 AQF/BS/S1	Bronze	-	1	40	3.5(w) 1.8(d) 42 Cord
C	HD02352-1 AQF/BS/S1/T	Antique Bronze	-	1	40	3.5(w) 1.8(d) 42 Cord
D	HD02350-1 AQF/BS/S1/S	Brass	-	1	40	3.5(w) 1.8(d) 42 Cord
E	HD03482-1 AQF/PD/BR	Brown	-	1	60	4.2(w) 1.8(d) 72 Cord
I	HD02358-1 AQF/PD/S3/CB	Copper Bronze	-	3	60	5.3(w) 6.0(d) 42 Cord

Sunlite's LED ceiling fixtures are designed for years of maintenance-free service. The brushed nickel finish highlights the stylish and clean appearance that will complement any decor. These dimmable fixtures have energy-efficient LED technology built-in, they are also ETL Listed for damp location installation with a life span of up to 50,000 hours. Ideal for offices, hotel rooms, bedrooms, bathrooms, kitchens, dining areas, entryways, or anywhere downlights are needed.

## LED Ceiling Flush Mount

### Double Band Trim



Adjust the color temperature of your room's lighting design!

27K 30K 35K 40K 50K

Steel & Acrylic Body  
White Lens  
80 CRI

Options

- 5 Year Warranty
- Photocell
- Motion Sensor

See Components list page for detail

Application

- Commercial
- Residential



\* DEEP



Oil Rubbed Bronze Finish




Polish Brass Finish

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>10" 12" 14" 16" 18" Diameter   Brushed Nickel Finish</b>								
HD03456-1	LFX/DCO/10"/16W/SCT/BN	16	1100	120	30K/40K/50K	50000	DL,DIM,ES	3.0(w) 10.0(d)
HD03706-1	LFX/DCO/12"/16W/SCT/BN	16	1120	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	3.0(w) 12.0(d)
87774-SU	LFX/DCO/12"/15W/SCT/BN/MV	15	1050	100-277	30K/40K/50K	50000	DL,DIM	3.0(w) 12.0(d)
* HD03053-1	LFX/DCO/12"/15W/SCT/BN/DEEP	15	1050	120	30K/40K/50K	50000	DL,DIM,ES	4.5(w) 12.0(d)
HD03707-1	LFX/DCO/14"/20W/SCT/BN	20	1400	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	2.9(w) 14.0(d)
87775-SU	LFX/DCO/14"/21W/SCT/BN/MV	21	1500	100-277	30K/40K/50K	50000	DL,DIM	3.5(w) 14.0(d)
87760-SU	LFX/DCO/16"/24W/SCT/BN	24	1680	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	4.0(w) 16.0(d)
87776-SU	LFX/DCO/16"/24W/SCT/BN/MV	24	1700	120-277	30K/40K/50K	50000	DL,DIM	4.0(w) 16.0(d)
87761-SU	LFX/DCO/18"/28W/SCT/BN	28	1960	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	4.0(w) 18.0(d)
HD03059-1	LFX/DCO/18"/28W/SCT/BN	28	2000	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	4.0(w) 18.0(d)
87777-SU	LFX/DCO/18"/28W/SCT/BN/MV	28	2000	100-277	30K/40K/50K	50000	DL,DIM	4.0(w) 18.0(d)
<b>12" 14" 16" Diameter   Oil Rubbed Bronze Finish</b>								
49052-SU	LFX/DCO/12"/17W/SCT/ORB	17	1050	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	3.3(w) 12.0(d)
49062-SU	LFX/DCO/14"/20W/SCT/ORB	20	2000	120	27K/30K/40K/50K/65K	50000	DL,DIM	2.9(w) 14.0(d)
49160-SU	LFX/DCO/16"/25W/SCT/ORB	25	2500	120	27K/30K/40K/50K/65K	50000	DL,DIM	4.0(w) 16.0(d)
<b>12" 14" 16" Diameter   Polish Brass Finish</b>								
49056-SU	LFX/DCO/12"/17W/SCT/PB	17	1050	120	27K/30K/35K/40K/50K	50000	DL,DIM	3.0(w) 12.0(d)
50436-SU	LFX/DCO/14"/20W/SCT/PB	20	2000	120	27K/30K/40K/50K/65K	50000	DL,DIM	2.9(w) 14.0(d)
50739-SU	LFX/DCO/16"/25W/SCT/PB	25	2500	120	27K/30K/40K/50K/65K	50000	DL,DIM	4.5(w) 16.3(d)
88339-SU	LFX/DCO/18"/30W/SCT/PB	30	3000	120	27K/30K/40K/50K/65K	50000	DL,DIM	4.0(w) 18.0(d)

## LED Ceiling Flush Mount

### Emergency Backup & Motion Sensor



Sunlite's LED decorative band trim fixtures feature a stylish design with a clean appearance. It's decorative brushed nickel band trim adds a touch of elegance to any room's decor. It provides general illumination and is ideal for bedrooms, hotels, offices and many other settings.



Emergency Battery Back up



Steel & Acrylic Body  
White Lens  
Brushed Nickel Finish  
Emergency Battery Backup  
80 CRI

#### Options



See Components list page for detail

#### Application



Commercial Residential

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>12" Diameter Emergency Battery Backup</b>								
HD03060-1	LFX/DC012/BN/15W/SCT/MV/EM	15	1050	100-277	30K/40K/50K	50000	DL,DIM	4.5(w) 12.0(d)
45601-SU	LFX/DC012/BN/15W/D/40K/EM	15	1100	120	4000K	50000	DL,DIM	4.5(w) 12.0(d)
<b>14" Diameter Emergency Battery Backup</b>								
HD03061-1	LFX/DC014/BN/21W/SCT/MV/EM	21	1500	100-277	30K/40K/50K	50000	DL,DIM	4.5(w) 14.0(d)
<b>16" Diameter Emergency Battery Backup</b>								
87781-SU	LFX/DC016/BN/24W/SCT/MV/EM	24	1700	100-277	30K/40K/50K	50000	DL,DIM	4.5(w) 16.0(d)
45604-SU	LFX/DC016/BN/23W/D/30K/EM	23	1700	120	3000K	50000	DL,DIM	4.5(w) 16.0(d)
45605-SU	LFX/DC016/BN/23W/D/40K/EM	23	1700	120	4000K	50000	DL,DIM	4.5(w) 16.0(d)
<b>18" Diameter Emergency Battery Backup</b>								
HD03062-1	LFX/DC018/BN/28W/SCT/MV/EM	28	2000	100-277	30K/40K/50K	50000	DL,DIM	4.5(w) 18.0(d)
HD03126-1	LFX/DC018/BN/28W/40K/EM	28	2100	120	4000K	50000	DL,DIM	4.5(w) 18.0(d)

## LED Ceiling Flush Mount

### Double Band Oval Trim



Steel & Acrylic Body  
White Lens  
Brushed Nickel Finish  
81 CRI

#### Options



See Components list page for detail

#### Application



Commercial Residential



A Brushed Nickel



B Black



C Oil Rubbed Bronze

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A Brushed Nickel Finish</b>								
HD03298-1	LFX/DC032/OVAL/BN/35W/SCT	35	3000	100-277	30K/40K/50K	50000	DL,DIM,ES	4.5(h) 18.0(w) 32.5(d)
<b>B Black Finish</b>								
HD03049-1	LFX/DC032/OVAL/BLK/35W/SCT	35	3000	100-277	30K/40K/50K	50000	DL,DIM,ES	4.5(h) 18.0(w) 32.5(d)
<b>C Oil Rubbed Bronze Finish</b>								
HD03051-1	LFX/DC032/OVAL/ORB/35W/SCT	35	3000	100-277	30K/40K/50K	50000	DL,DIM,ES	4.5(h) 18.0(w) 32.5(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**





Steel & Acrylic Body  
White Lens  
Brushed Nickel / Oil Rubbed Bronze Finish  
80 CRI

Options



See Components list page for detail

Application



## LED Ceiling Semi Flush Mount

### Double Band Trim

These easy to install, dimmable fixtures have energy-efficient LED technology built-in, so there are no bulbs to replace. The output is a bright, flicker-free 1050 lumen. These tunable fixtures feature innovative technology that allows you to choose the color temperature at the time of installation. Select 3000K Warm White, 4000K Cool White, or 5000K Super White depending on your preference using a switch located on the back. Energy Star Certified and may qualify for state and local rebates.



A Brushed Nickel



B Oil Rubbed Bronze

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A HD03048-1	LFX/DC012/P/BN/15W/SCT	15	1050	120	30K/40K/50K	50000	DL,DIM	9.0(w) 12.0(d)
B HD03162-1	LFX/DC012/P/ORB/15W/SCT	15	1050	120	30K/40K/50K	50000	DL,DIM	9.0(w) 12.0(d)

Sunlite LED 15-inch semi flush mount ceiling fixtures are designed for years of maintenance-free service. The brushed nickel finish highlights the stylish and clean appearance that will complement any decor. These easy to install, dimmable fixtures have energy efficient LED technology built-in so there are no bulbs to replace. Ideal for offices, hotel rooms, bedrooms, bathrooms, kitchens, dining areas, entryways or anywhere downlights are needed. They are also UL Listed for damp location installation. With a life span of up to 50,000 hours they are an ideal, no maintenance solution for both residential and commercial installations. ETL Listed for damp location installation.

Steel & Acrylic Body  
Acrylic Lens  
Brushed Nickel / Oil Rubbed Bronze Finish  
80 CRI



Application



## LED Ceiling Semi Flush Mount

### Solid Band Trim



A Brushed Nickel



B Oil Rubbed Bronze

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A HD03457-1	LFX/MPM/15"/30W/SCT/SN	30	1950	120	30K/40K/50K	50000	DL,DIM	9.0(w) 15.0(d)
B HD02714-1	LFX/MPM/15"/30W/30K/ORB	30	1950	120	3000K	50000	DL,DIM	9.0(w) 15.0(d)

## LED Ceiling Flush Mount

Half Band & Half Glass Trim



A Round



B Square



Steel & Glass Body  
Frosted Lens  
Brushed Nickel Finish  
81 CRI

Options



See Components list page for detail

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A Round</b>								
49154-SU	LFX/R/GL/20W/5SCT/BN	20	1000	120	27K/30K/35K/40K/50K	50000	DL,DIM	2.5(w) 11.0(d)
<b>B Square</b>								
49096-SU	LFX/S/GL/20W/BN/30K	20	1000	120	3000K	50000	DL,DIM	3.0(h) 11.0(w) 11.0(d)

## LED Ceiling Flush Mount

Double Band Trim With Extended Lens



Steel & Acrylic Body  
White Lens  
Brushed Nickel Finish  
80 CRI

Options



See Components list page for detail

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>13" Diameter</b>								
HD03056-1	LFX/DFM/13"/20W/BN/SCT	20	1400	100-277	30K/40K/50K	50000	DL,DIM	4.0(w) 13.0(d)
<b>18" Diameter</b>								
HD03128-1	LFX/DFM/18"/25W/BN/SCT	25	1500	120	30K/40K/50K	50000	DL,DIM	4.0(w) 17.0(d)

## LED Ceiling Flush Mount

Flat Panel



Aluminum Body  
White Lens  
PMMA Optical Lens  
White Finish  
80 CRI

5  
Year  
Warranty

See Components list page for detail

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
85435-SU	LFX/1X1/15W/DLC/35K/D	15	1200	120	3500K	50000	DL,DIM	0.8(h) 11.8(w) 11.8(d)
HD03596-1	LFX/1X1/10W/SCT	10	920	120	30K/35K/40K/45K/50K	50000	DL,DIM	1.1(h) 11.9(w) 11.9 (d)



Steel Body  
White Lens  
Black Finish  
80 CRI

**3**  
Year  
Warranty

Application

Commercial Residential

## LED Ceiling Flush Mount

### Drum Style



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> HD03163-1	LFX/DCF/15W/30K/11"/BK	15	950	120	30K/40K/50K	25000	DL	4.0(w) 11.0(d)
<b>B</b> 50733-SU	LFX/RND/15W/30K/5"/BK	15	1000	120	3000K	50000	DL, DIM	2.2(w) 5.0 (d)

Aluminum & Steel Body  
Frosted Glass Lens  
Black Finish  
80 CRI

**5**  
Year  
Warranty

Application

Commercial Residential

## LED Ceiling Flush Mount

### Square Trim



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81328-SU	LFX/PYR/12W/3SCT/BK	12	650	120	30K/40K/50K	5000	DL	5.0(h) 10.3(w) 10.3(d)

Steel & Glass Body  
White Lens  
Black Finish  
81 CRI

**5**  
Year  
Warranty

Application

Commercial Residential

## LED Ceiling Flush Mount

### Decorative Band Trim



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03574-1	LFX/DCO/13"/20W/SCT/BK	20	1050	120	30K/40K/50K	50000	DL, DIM	3.0(w) 13.0(d)

## LED Ceiling Flush Mount

Mushroom Solid Band Trim



Steel & Acrylic Body  
white Lens  
White Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02983-1	LFX/AM/11"/15W/SCT	15	1050	100	27K/30K/35K/40K/50K	50000	DL,DIM,ES	3.3(w) 10.0(d)
HD02984-1	LFX/AM/13"/21W/SCT	21	1450	100	27K/30K/35K/40K/50K	50000	DL,DIM,ES	3.6(w) 13.0(d)

## LED Ceiling Flush Mount

Solid Band Trim



Plastic Body  
Clear Lens  
White Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03058-1	LFX/SCF/10"/15W/SCT	15	1050	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	2.2(w) 10.0(d)
HD02982-1	LFX/SCF/13"/21W/SCT	21	1450	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	2.2(w) 13.0(d)

## LED Ceiling Flush Mount

Drum Style



Plastic Body  
White Lens  
White Finish  
90 CRI

Options



See Components list page for detail

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>11" Diameter</b>								
50218-SU	LFX/AM/11/17W/SCT	17	1050	120	27K/30K/35K/40K/50K	50000	DL,DIM	3.5(w) 11.0(d)
<b>14" Diameter</b>								
50216-SU	LFX/AM/14/17W/SCT	17	1050	120	27K/30K/35K/40K/50K	50000	DL,DIM	3.5(w) 14.0(d)
50217-SU	LFX/AM/14/20W/SCT	20	2000	120	27K/30K/40K/50K/65K	50000	DL,DIM	3.5(w) 14.0(d)

Sunlite's LED 11-inch round ceiling fixtures are designed for years of maintenance-free service. The simplistic white mushroom design blends in with any room. These easy to install, dimmable fixtures have energy-efficient LED technology built-in, so there are no bulbs to replace. Ideal for bedrooms, bathrooms, kitchens, hallways, closets, entryways, or anywhere downlights are needed. They are also ETL Listed for safety with a life span of up to 50,000 hours.

Plastic Body  
Clear Lens  
White Finish  
80 CRI

5  
Year  
Warranty

Application



## LED Ceiling Flush Mount Round Mushroom Style



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03579-1	LFX/MU/11"/16W/SCT	16	1200	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	3.7(h) 11.0(d)
HD03576-1	LFX/MU/11"/20W/SCT	20	1500	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	3.7(h) 11.0(d)
87764-SU	LFX/MU/14"/24W/SCT	24	1800	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	x.x(h) xx.0(d)
HD03577-1	LFX/MU/19"/MW/SCT	24/28/32	1680/1960/2240	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	4.1(w) 19.0(d)

Plastic Body  
Clear Lens  
White Finish  
80 CRI

5  
Year  
Warranty

Application



## LED Ceiling Flush Mount Square Mushroom Style



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>11", 14" Square</b>								
HD02662-1	LFX/MU/SQ/11"/16W/E/D/30K	16	1200	120	3000K	50000	DL,DIM	3.0(h) 11.0(w) 11.0(d)
HD02663-1	LFX/MU/SQ/11"/16W/E/D/40K	16	1200	120	4000K	50000	DL,DIM	3.0(h) 11.0(w) 11.0(d)
HD02664-1	LFX/MU/SQ/14"/24W/E/D/30K	24	1750	120	3000K	50000	DL,DIM	2.8(h) 15.0(w) 15.0(d)
HD02665-1	LFX/MU/SQ/14"/24W/E/D/40K	24	1750	120	4000K	50000	DL,DIM	2.8(h) 15.0(w) 15.0(d)

Metal & Acrylic Body  
White Lens  
White Finish  
80 CRI

5  
Year  
Warranty

Application



## LED Ceiling Flush Mount Pull Chain Socket



Remove the existing light bulb in the old socket and screw the new fixture right into the old socket. No electrician needed.

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02583-1	LFX/E26/7"/10W/30K	10	700	100-277	3000K	50000	DL	5.0(w) 7.5(d)
HD02584-1	LFX/E26/7"/10W/40K	10	700	100-277	4000K	50000	DL	5.0(w) 7.5(d)

## LED Ceiling Flush Mount

### Premium Design



Energy efficient Sunlite LED ceiling fixtures are designed for years of maintenance-free service. These surface mount mini downlights have a slim and simplistic design with brushed nickel trim that fits perfectly into any modern setting. These easy to install, dimmable fixtures have energy efficient LED technology built-in so there are no bulbs to replace. Ideal for closets, hallways, stairways, entryways, storage areas, basements, or anywhere downlight is needed. They are also ETL Listed for damp location installation. With a life span of up to 50,000 hours they are an ideal, no maintenance solution for both residential and commercial installations.

Aluminum & Acrylic Body  
White Lens  
Bronze / White Finish  
90 CRI

5  
Year  
Warranty



### 7" Emergency Battery

81269-SU Emergency Battery

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>Round 5",7",9",12"</b>								
HD02477-1	LFX/MP/5R/10W/E/D/SCT/WH	10	600	120	30K/40K/50K	50000	DL,DIM	0.6(w) 5.5(d)
HD02481-1	LFX/MP/7R/15W/E/D/SCT/WH	15	900	120	30K/40K/50K	50000	DL,DIM	0.6(w) 7.4(d)
HD02483-1	LFX/MP/9R/18W/E/D/SCT/WH	18	1100	120	30K/40K/50K	50000	DL,DIM	0.6(w) 9.0(d)
81289-SU	LFX/MP/12R/22W/CRI90/5SCT/WH	22	1450	120	27K/30K/35K/40K/50K	50000	DL,DIM	0.5(w) 11.75(d)
<b>Square 5",9"</b>								
HD02479-1	LFX/MP/5S/10W/E/D/SCT/WH	10	600	120	30K/40K/50K	50000	DL,DIM	0.6(h) 4.4(d)
HD02485-1	LFX/MP/9S/18W/E/D/SCT/WH	18	1100	120	30K/40K/50K	50000	DL,DIM	0.6(h) 9.0(w) 9.0(d)


## LED Ceiling Flush Mount

### Motion Closet Light



Sunlite's color selectable mini panel fixture with motion sensor, allows for selecting the light temperature to match a wide range of applications while saving even more energy by illuminating only when needed. The color selectable switch placed on the fixture's side, allows the user to choose between five white color temperatures, ranging from 2700K to 5000K. The Infrared motion sensor located on the fixture, helps save even more energy by either dimming the light output (bi-level) or turning off (on/off) when no motion is detected. This feature can be disabled by simply switching to "off."

Plastic Body  
White Lens  
White Finish  
Built-in Bi-Level Motion Sensor  
90 CRI



On/Off / Bi-Level Sensor

SCT Switch

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03713-1	LFX/MP/5R/12W/MS/SCT	12	700	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	0.9(w) 5.7(d)
HD03714-1	LFX/MP/8R/13W/MS/SCT	13	1000	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	0.9(w) 8.2(d)
HD03587-1	LFX/MP/12R/18W/MS/SCT	18	1400	120	27K/30K/35K/40K/50K	50000	DL,DIM,ES	0.9(w) 12.1(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB


**sunlite**

Sunlite LED disc ceiling fixtures are designed for years of maintenance-free service. The bronze metallic finish highlights the stylish and clean appearance that will complement any decor. These easy to install fixtures have energy efficient LED technology built-in so there are no bulbs to replace. Ideal for offices, bedrooms, bathrooms, hotel rooms, hallways, entryways or anywhere downlight is needed. They are also UL Listed for use in damp locations. Installing these Energy Star Certified fixtures may qualify you for state and local energy rebates. With a life span of up to 50,000 hours they are an ideal, no maintenance solution for both residential and commercial use.

Metal Body  
White Lens  
Bronze or White Finish  
90 CRI

5  
Year  
Warranty

Application



## LED Ceiling Flush Mount Slim Disc Light



A



B



C



LED  
BUILT-IN




90  
CRI

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A Bronze Finish</b>								
HD02927-1	LFX/DISC/6"/13W/30K/E/D/BRONZE	13	750	120	3000K	50000	WL,DIM,ES	1.3(w) 7.4(d)
<b>B White Finish</b>								
HD03601-1	LFX/DISC/6"/12W/SCT/WHITE	12	840	120	27K/30K/35K/40K/50K	35000	WL,DIM,ES	1.7(w) 6.3(d)
HD03602-1	LFX/DISC/7"/15W/SCT/WHITE	15	1050	120	27K/30K/35K/40K/50K	35000	WL,DIM,ES	1.7(w) 7.6(d)
HD03462-2	LFX/DISC/7.5"/15W/30K/WHITE	15	1050	120	3000K	50000	DL,DIM	1.0(w) 7.5(d)
HD03463-2	LFX/DISC/7.5"/15W/40K/WHITE	15	1050	120	4000K	50000	DL,DIM	1.0(w) 7.5(d)
<b>C Nickel Finish</b>								
HD02669-1	LFX/DISC/7.5"/15W/ SCT /D/BN	15	800	120	30K/40K/50K	50000	WL,DIM	1.1(w) 7.5(d)

Metal & Acrylic Body  
White Lens  
Brushed Nickel / Oil Rubbed Bronze Finish  
81 CRI

5  
Year  
Warranty

Application



## LED Ceiling Flush Solid Band Slim Design



A



B

LED  
BUILT-IN



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A Brushed Nickel Finish</b>								
HD02722-1	LFX/DCO7/MINI/BN/E/D/15W/30K	15	1000	120	3000K	50000	DL,DIM,ES	1.3(w) 7.4(d)
HD02723-1	LFX/DCO7/MINI/BN/D/15W/40K	15	1020	120	4000K	50000	DL,DIM,ES	1.3(w) 7.4(d)
<b>B Oil Rubbed Bronze Finish</b>								
HD03133-1	LFX/DCO7/MINI/ORB/15W/SCT	15	1000	120	30K/40K/50K	50000	WL,DIM	1.3(w) 7.4(d)

## LED Ceiling Flush Mount

Fabric Shade Drum Style



Steel & Plastic Body  
White Lens  
Brushed Nickel & Fabric Finish  
81 CRI

3  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
49161-SU	LFX/FD/13"/20W/3SCT/BN	20	1100	120	30K/40K/50K	35000	DL,DIM	5.0(w) 13.0(d)
HD03458-1	LFX/FD/17.5/28W/DIM/BN/SCT	28	1680	120	27K/30K/35K/40K/50K	35000	DL,DIM	5.0(w) 17.0(d)

## LED Ceiling Flush Mount

Alabaster Glass Lens



A



B



Sunlite's LED decorative fixtures feature a stylish design with a clean appearance. It's decorative brushed nickel band trim adds a touch of elegance to any room's decor. It provides general illumination and is ideal for bedrooms, hotels, offices and many other settings.

Metal & Glass Body  
Alabaster Lens  
Brushed Nickel Finish  
90 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A 12" 14" 16" Diameter</b>								
50157-SU	LFX/DBN12/17W/BN/SCT	17	1500	120	27K/30K/35K/40K/50K	25000	DL,DIM	4.8(w) 12.0(d)
50134-SU	LFX/DBN14/20W/BN/SCT	20	2000	120	27K/30K/40K/50K/65K	25000	DL,DIM	4.8(w) 14.0(d)
50135-SU	LFX/DBN16/25W/BN/SCT	25	2500	120	27K/30K/40K/50K/65K	25000	DL,DIM	4.8(w) 16.0(d)
<b>B 13" 15" Diameter</b>								
49050-SU	LFX/DBN13/AL/E/D/30K	20	1400	120	3000K	35000	DL,DIM,ES	5.5(w) 13.0(d)
HD03131-1	LFX/DBN13/20W/BN/AL/SCT	20	1200	120	30K/40K/50K	50000	DL,DIM	4.8(w) 13.0(d)
HD03132-1	LFX/DBN15/25W/BN/AL/SCT	25	1610	120	30K/40K/50K	50000	DL,DIM	4.8(w) 15.0(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**

# Ceiling Flush Mount

Glass Lens

**BULB**  
REQUIRED

120 volts  
Med (E26) /GU24 Base  
Uses A19 Bulb(s)  
Metal & Glass Body  
UL Listed

Bulb Suggestion



Application



Commercial

Residential



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> 46060-SU	DAB13/AL	Antique Bronze	Alabaster Glass	2	60	6.0(w) 13.0(d)
<b>Alabaster Lens</b>						
<b>B</b> HD02961-1	S1000A	Weathered Bronze	Alabaster Glass	3	60	7.9(w) 15.4(d)
<b>C</b> HD02962-1	S1010A	Weathered Bronze	Alabaster Glass	3	60	11.4(w) 15.4(d)
<b>D Brushed Nickel   GU24   CFL Bulb Included</b>						
HD02954-1	DBN14/AL/GU24/2-18/ES	Brushed Nickel	Alabaster Glass	2	18	4.5(w) 13.3(d)
04282-SU	DBN16/AL/GU24/3-18/ES	Brushed Nickel	Alabaster Glass	3	18	4.8(w) 15.3(d)
<b>E Distressed Brown - Tea Stain Lens   Med (E26)</b>						
HD02955-1	DDB11/TS	Distressed Brown	Tea Stained Glass	2	60	5.5(w) 11.0(d)
HD02956-1	DDB15/TS	Distressed Brown	Tea Stained Glass	3	60	5.5(w) 15.3(d)
<b>F Distressed Brown - Alabaster Lens   Med (E26)</b>						
HD02958-1	DDB13/AL	Distressed Brown	Alabaster Glass	2	60	5.8(w) 13.3(d)
HD02959-1	DDB15/AL	Distressed Brown	Alabaster Glass	3	60	5.5(w) 15.3(d)
<b>G Polished Brass - White Lens   Med (E26)</b>						
HD02798-1	DBS11/FR	Polished Brass	Frosted Glass	2	60	6.0(w) 11.0(d)
HD02799-1	DBS13/FR	Polished Brass	Frosted Glass	2	60	6.0(w) 13.3(d)
<b>H Polished Brass - Clear Lens   Med (E26)</b>						
HD02801-1	DBS11/CL	Polished Brass	Clear Glass	2	60	5.3(w) 11.3(d)
HD02802-1	DBS13/CL	Polished Brass	Clear Glass	2	60	6.3(w) 13.0(d)
<b>I Brushed Nickel - Alabaster Lens   Med (E26)</b>						
HD02806-1	DBN11/AL	Brushed Nickel	Alabaster Glass	2	60	11.3(w) 11.3(d)
HD02807-1	DBN13/AL	Brushed Nickel	Alabaster Glass	2	60	5.3(w) 13.3(d)
HD02808-1	DBN15/AL	Brushed Nickel	Alabaster Glass	3	60	5.3(w) 15.3(d)
<b>J Smooth White - White Lens   Med (E26)</b>						
HD02803-1	DWS11/FR	Smooth White	Frosted Glass	2	60	5.3(w) 11.5(d)
HD02804-1	DWS13/FR	Smooth White	Frosted Glass	2	60	6.3(w) 13.0(d)
<b>K Spot White   Med (E26)</b>						
04559-SU	DWS11/AL	White	Alabaster Glass	1	60	5.5(w) 11.0(d)



## Ceiling Flush Mount

### Ceiling Fixtures

**BULB**  
REQUIRED

120 volts  
GU24 Base  
Uses CFL / LED Bulb(s)  
Metal & Glass Body  
UL Listed  
Lamp(s) Included

#### Bulb Suggestion



#### Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02963-1	FCM16/AL/GU24/2-18/ES	White	Alabaster Glass	2	18	4.8(w) 16.0(d)
<b>B</b> HD02964-1	112/KL/WH	Floral Frosted White Glass	White Glass	2	60	5.2(h) 11.4(w) 11.4(d)
<b>C</b> HD02965-1	112/PC/WH	Floral Frosted White Glass	White Glass	2	60	5.2(h) 11.4(w) 11.4(d)
<b>D</b> 41309-SU	B12/WH	White	White Glass	2	60	5.0(h) 4.8(w) 11.0(d)
<b>E</b> 04425-SU	KIT6/CH	Chrome	Clear/White Glass	1	60	4.3(w) 6.8(d)
<b>F</b> HD02920-1	HALL8/PB	Polished Brass	White Glass	2	60	4.8(w) 8.8(d)
HD02921-1	HALL8/PB/GU24/2-18/ES	Polished Brass	White Glass	2	18	4.8(w) 8.8(d)
<b>G</b> HD02922-1	HALL6/WH	White	White Glass	1	60	5.0(w) 6.0(d)
HD02923-1	HALL8/WH	White	White Glass	2	60	5.5(w) 8.0(d)
<b>H</b> 04455-SU	GLO6/WH	White	White Glass	1	60	7.0(w) 6.0(d)
<b>I</b> 04476-SU	GLO8/BN	Brushed Nickel	Alabaster Glass	1	100	9.0(w) 8.0(d)

## Ceiling Flush Mount

### Fluorescent Circline Style

**BULB**  
REQUIRED

120 volts  
4-Pin Base  
Uses FC8T9 Bulb  
UL Listed

#### Bulb Suggestion



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> <b>Chrome</b>						
04375-SU	22/CR	Chrome	-	1	22	3.5(w) 8.5(d)
04390-SU	32/CR	Chrome	-	1	32	3.5(w) 12.3(d)
04405-SU	54/CR	Chrome	-	1	32	3.5(w) 12.3(d)
<b>B</b> <b>White</b>						
04380-SU	22/WH	White	-	1	22	3.2(w) 8.5(d)
04395-SU	32/WH	White	-	1	32	3.5(w) 12.3(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM


CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**


Flush Mount  
120 volts  
Medium (E26) Base  
Black finish  
Metal Body  
ETL Listed  
Bulb Not Included

**Bulb Suggestion**



PAR30 Med E26    A19 Med E26

**Application**



Hospitality    Retail    Residential

## Ceiling Flush Mount

Cylinder




**BULB  
REQUIRED**

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
90161-SU	FIX/1LT/BK/E26	Black	-	1	60	7.0(h) 5.0(d)


Surface Mount  
120 volts  
GU10 Base  
Metal Body  
ETL Listed  
Bulb Not Included

**Bulb Suggestion**



MR16 GU10


**Application**



Hospitality    Retail    Residential

## Ceiling Flush Mount

Cube

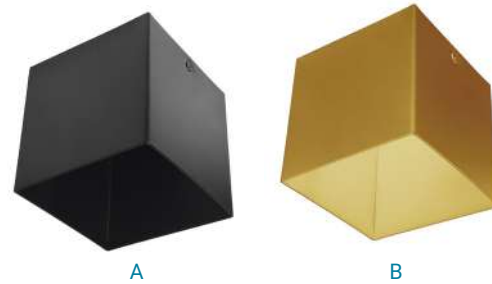


**BULB  
REQUIRED**

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> 90159-SU	FIX/CUBE/GU10/BK	Black	-	1		4.0(h) 4.0(w) 4.0(d)
<b>B</b> 90164-SU	FIX/CUBE/GU10/PB	Polished Brass	-	1		4.0(h) 4.0(w) 4.0(d)


Surface Mount  
120 volts  
Medium (E26) Base  
Metal Body  
UL Listed  
Bulb Not Included

**Bulb Suggestion**



A19 Med E26

**Application**



Hospitality    Office    Retail    Commercial    Residential

## Ceiling Semi Flush Mount

Socket



**BULB  
REQUIRED**

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02711-1	AQF/FM/S1/BB	Brass	-	1	60	4.8(w) 4.7(d)
<b>B</b> 46071-SU	FIX/LH/E26/BK/5"	Black	-	1	60	2.8(h) 5.0(d)
<b>C</b> 90163-SU	FIX/1LT/PB/E26	Polished Brass	-	1	60	3.0(h) 6.0(d)

# LED Adjustable Track Light

4 Lights



Metal Body  
Clear Lens  
Chrome Finish  
80 CRI

3  
Year  
Warranty


Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81146-SU	LFX/TRL/4H/23W/30K/CH	23	1200	120	3000K	50000	DL,DIM	7.0(h) 4.8(w) 32.0(d)

# Adjustable Track Light

3 Lights / 5 Lights / 6 lights




Surface Mount  
120 volts  
GU10 Base  
Metal Body  
ETL Listed  
Bulb Not Included

Bulb Suggestion



MR16  
GU10

Application

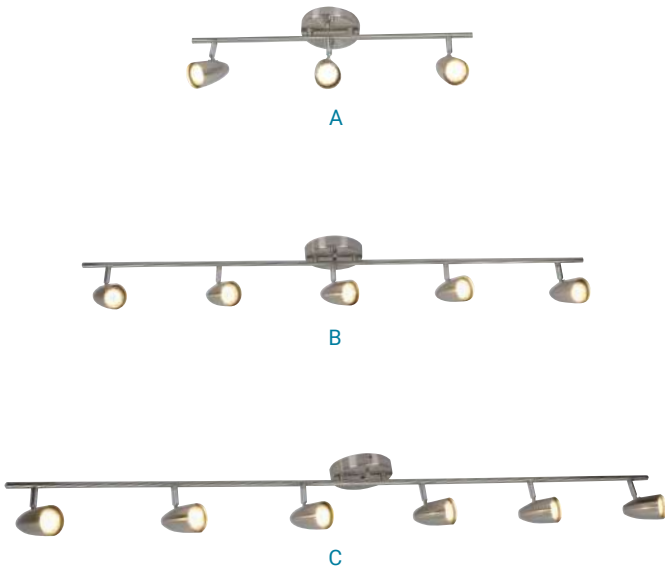

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> 45065-SU	FIX/TRL/3H/24"/BN	Brushed Nickel	-	3		x.x(h) x.x(w) 24.0(d)
<b>B</b> 45063-SU	FIX/TRL/5H/45"/BN	Brushed Nickel	-	5		x.x(h) x.x(w) 45.0(d)
<b>C</b> 45064-SU	FIX/TRL/6H/54"/BN	Brushed Nickel	-	6		x.x(h) x.x(w) 54.0(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB





Aluminum & Plastic Body  
White Lens  
Brushed Nickel / Bronze Finish  
81 CRI

5  
Year  
Warranty

Application



## LED Wall Mount Sconce Half Cylinder

LED  
BUILT-IN



A



B



C



D

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> HD03042-1	LFX/HC/BN/15W/SCT	15	1050	100-277	30K/40K/50K	50000	DL,DIM,ES	10.0(h) 7.0(w) 4.0(d)
HD03044-1	LFX/HC/BN/25W/SCT	25	1600	100-277	30K/40K/50K	50000	DL,DIM,ES	10.0(h) 9.0(w) 4.0(d)
<b>B</b> HD03134-1	LFX/HC/ORB/15W/SCT	15	950	120	30K/40K/50K	50000	WL,DIM,ES	10.0(h) 7.0(w) 3.0(d)
<b>C</b> HD03041-1	LFX/DHC/13"/12W/BN/SCT	12	840	100-277	30K/40K/50K	50000	DL,DIM	13.0(h) 8.0(w) 4.0(d)
<b>D</b> 88679-SU	LFX/WS/CHC/15W/SCT/BN	15	1050	120	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)

The Sunlite Decorative Half Moon Wall Sconce fixtures are perfect for modern living rooms, foyers and hallways. Their durable steel body, white lens and brushed nickel finish, will bring a fresh feel to your space.

Aluminum & Plastic Body  
White Lens  
Brushed Nickel Finish  
81 CRI

5  
Year  
Warranty

Application



## LED Wall Mount Sconce Half Moon Wall Sconce

LED  
BUILT-IN



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02940-1	LFX/HM/BN/D/30K	12	840	120	3000K	50000	DL,DIM,ES	6.0(h) 3.5(w) 12.0(d)
HD02941-1	LFX/HM/BN/D/40K	12	890	120	4000K	50000	DL,DIM,ES	6.0(h) 3.5(w) 12.0(d)

## LED Wall Mount Sconce

### Decorative Wall Sconce



Aluminum & Plastic Body  
White Lens  
Brushed Nickel Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A	85098-SU LFX/WS/12W/SCT/BN	12	800	120	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
B	85099-SU LFX/WS/12W/SCT/BN	12	800	120	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
C	85100-SU LFX/WS/12W/SCT/BN	12	800	120	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
D	85101-SU LFX/WS/12W/SCT/BN	12	800	120	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)

## LED Wall Mount Sconce

### Amber Glass Lens



The Sunlite Decorative Wall Sconce fixtures are ideal for living rooms, bedrooms and foyers. Their steel housing and amber glass lens create a beautiful antique look. Their fully dimmable capability enhances the warm feel these fixtures create.


Steel & Glass Body  
Amber Glass Lens  
Copper Bronze Finish  
81 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02979-1	LFX/WS/5/12W/DIM/30K	12	600	120	3000K	50000	DIM	9.0(h) 3.5(w) 5.5(d)

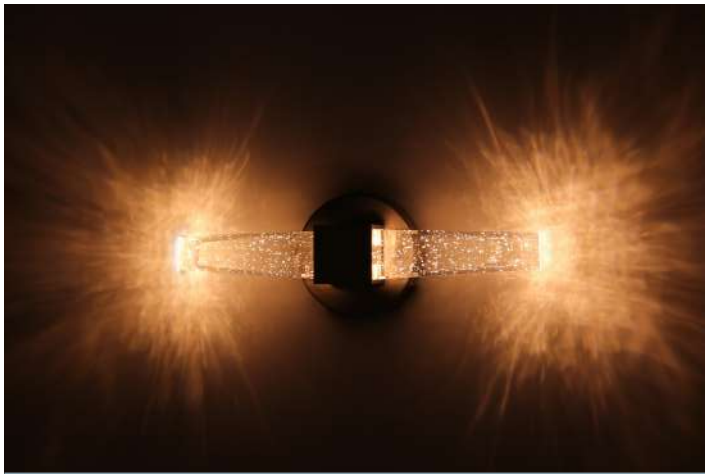

Metal Body  
Seeded clear glass  
Brushed Nickel Finish  
80 CRI

5  
Year  
Warranty

Application



## LED Wall Mount Sconce

Clear Seedy Glass



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81033-SU	LFX/WS/SEEDY/2LT/15W/30K/BN	15	1000	120	3000K	50000	DL,DIM	12.0(h) 5.0(w) 4.0(d)

This Sunlite LED 6-watt brushed nickel indoor wall sconce light fixture has a classic design with modern LED technology built-in. With a long 50,000 hour lifespan this dimmable fixture will provide years of maintenance free service. Ideal for bedside, bathrooms, powder rooms, and more. It can be mounted with the white acrylic shade pointing up or down. Built in on/off switch on the base for manual control. Light output is a bright 420 lumens at 3000K warm white color temperature. Equivalent to a 25 watt light bulb while only using 6 watts of electricity.

Aluminum & Steel Body  
White Lens  
Brushed Nickel Finish  
80 CRI

5  
Year  
Warranty

Application



## LED Wall Mount Fixture

1 Light Sconce with Switch



On / Off Switch

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03007-1	LFX/WS/30K/6W/LT/BN/8"	6	420	120	3000K	50000	DL,DIM,ES	8.0(h) 4.5(w) 3.8(d)



## LED Wall Mount Sconce

Contemporary Design



These Sunlite decorative LED wall sconces will add a contemporary touch to any home or business. The brushed nickel frame holds a curved opaque lens that is open to allow light to wash the wall above and below. This fixture emits a dimmable 3000K warm white light. Designed for indoor use and UL Listed for damp location installation. With built-in LEDs this attractive fixture will provide up to 30,000 hours of reliable and maintenance free service. Mounting hardware, screws, wire nuts and installation instructions are included.



Steel & Plastic Body  
Frosted Lens  
Brushed Nickel Finish  
90 CRI

3  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A	HD02943-1 LFX/WS/1L/10W/D/E/30K	10	600	120	3000K	30000	DL,DIM	4.2(h) 2.8(w) 6.9(d)
B	HD02945-1 LFX/WS/2L/20W/D/E/30K	20	1200	120	3000K	30000	DL,DIM	4.2(h) 2.8(w) 14.9(d)
C	HD02946-1 LFX/WS/3L/30W/D/E/30K	30	1800	120	3000K	30000	DL,DIM	4.2(h) 2.8(w) 22.7(d)
D	HD02947-1 LFX/WS/4L/40W/D/E/30K	40	2400	120	3000K	30000	DL,DIM	4.2(h) 2.8(w) 30.7(d)

## LED Wall Mount Sconce

Contemporary Design



Steel & Glass Body  
Frosted Lens  
Brushed Nickel Finish  
81 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02942-1	LFX/WS/AR/14/9W/DIM/30K	9	500	120	3000K	50000	DIM	4.2(h) 14.0(w) 3.0(d)
HD02944-1	LFX/WS/AR/14/9W/DIM/40K	9	500	120	4000K	50000	DIM	6.5(h) 14.0(w) 3.0(d)



**LED Wall Sconce Bar / Bath Vanity Light**  
Contemporary Style



Metal & Acrylic Body  
White Lens  
Chrome Finish  
80 CRI

5  
Year  
Warranty

Application



SCT Switch

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81031-SU	LFX/BAR/REC/2LT/15W/SCT/BN 27"	15	1050	120	27K/30K/35K/40K/50K	50000	DL,DIM	4.8(h) 27.0(w) 3.0(d)

Metal & Acrylic Body  
White Lens  
Chrome Finish  
80 CRI

5  
Year  
Warranty

Application

**LED Wall Sconce Bar / Bath Vanity Light**  
Contemporary Style




Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02372-1	LFX/BAR/20W/30K/18"/CH/D/ACRYL	20	1100	120	3000K	50000	DL,DIM	3.5(h) 15.5(w) 4.0(d)
HD03166-1	LFX/BAR/20W/SCT/18"/BN/ACRYL	20	1600	120	30K/40K/50K	50000	DL,DIM	3.5(h) 18.5(w) 4.0(d)

# LED Wall Sconce Bar / Bath Vanity Light

Etched Glass Shade Cylinder

LED  
BUILT-IN

90  
CRI

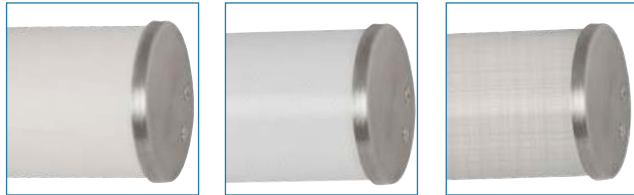

A Smooth

B P-Dot

C P-Fabric



D Brilliant

E Dia-D

F Ballpoint



Metal Body  
Smooth Lens  
Brushed Nickel Finish  
90 CRI

3  
Year  
Warranty

Application



Hospitality Commercial Residential

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A Smooth</b>								
81342-MKS	MKS/BAR/13W/18"/30K/CH/SM	13	1200	120	3000K	30000	DIM	2.0(h) 18.0(w)
81343-MKS	MKS/BAR/13W/18"/40K/CH/SM	13	1200	120	4000K	30000	DIM	2.0(h) 18.0(w)
81354-MKS	MKS/BAR/16W/24"/30K/CH/SM	16	1300	120	3000K	30000	DIM	2.0(h) 24.0(w)
81355-MKS	MKS/BAR/16W/24"/40K/CH/SM	16	1300	120	4000K	30000	DIM	2.0(h) 24.0(w)
<b>B P-Dot</b>								
81344-MKS	MKS/BAR/13W/18"/30K/CH/PD	13	1200	120	3000K	30000	DIM	2.0(h) 18.0(w)
81345-MKS	MKS/BAR/13W/18"/40K/CH/PD	13	1200	120	4000K	30000	DIM	2.0(h) 18.0(w)
81356-MKS	MKS/BAR/16W/24"/30K/CH/PD	16	1300	120	3000K	30000	DIM	2.0(h) 24.0(w)
81357-MKS	MKS/BAR/16W/24"/40K/CH/PD	16	1300	120	4000K	30000	DIM	2.0(h) 24.0(w)
<b>C P-Fabric</b>								
81346-MKS	MKS/BAR/13W/18"/30K/CH/PF	13	1200	120	3000K	30000	DIM	2.0(h) 18.0(w)
81347-MKS	MKS/BAR/13W/18"/40K/CH/PF	13	1200	120	4000K	30000	DIM	2.0(h) 18.0(w)
81358-MKS	MKS/BAR/16W/24"/30K/CH/PF	16	1300	120	3000K	30000	DIM	2.0(h) 24.0(w)
81359-MKS	MKS/BAR/16W/24"/40K/CH/PF	16	1300	120	4000K	30000	DIM	2.0(h) 24.0(w)
<b>D Brilliant</b>								
81348-MKS	MKS/BAR/13W/18"/30K/CH/BT	13	1200	120	3000K	30000	DIM	2.5(h) 18.0(w)
81349-MKS	MKS/BAR/13W/18"/40K/CH/BT	13	1200	120	4000K	30000	DIM	2.5(h) 18.0(w)
81360-MKS	MKS/BAR/16W/24"/30K/CH/BT	16	1300	120	3000K	30000	DIM	2.5(h) 24.0(w)
81361-MKS	MKS/BAR/16W/24"/40K/CH/BT	16	1300	120	4000K	30000	DIM	2.5(h) 24.0(w)
<b>E Dia-D</b>								
81350-MKS	MKS/BAR/13W/18"/30K/CH/DD	13	1200	120	3000K	30000	DIM	2.5(h) 18.0(w)
81351-MKS	MKS/BAR/13W/18"/40K/CH/DD	13	1200	120	4000K	30000	DIM	2.5(h) 18.0(w)
81362-MKS	MKS/BAR/16W/24"/30K/CH/DD	16	1300	120	3000K	30000	DIM	2.5(h) 24.0(w)
81363-MKS	MKS/BAR/16W/24"/40K/CH/DD	16	1300	120	4000K	30000	DIM	2.5(h) 24.0(w)
<b>F Ballpoint</b>								
81352-MKS	MKS/BAR/13W/18"/30K/CH/BP	13	1200	120	3000K	30000	DIM	2.5(h) 18.0(w)
81353-MKS	MKS/BAR/13W/18"/40K/CH/BP	13	1200	120	4000K	30000	DIM	2.5(h) 18.0(w)
81364-MKS	MKS/BAR/16W/24"/30K/CH/BP	16	1300	120	3000K	30000	DIM	2.5(h) 24.0(w)
81365-MKS	MKS/BAR/16W/24"/40K/CH/BP	16	1300	120	4000K	30000	DIM	2.5(h) 24.0(w)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**



Steel & Acrylic Body  
White Lens  
Brushed Nickel Finish  
80 CRI



**5**  
Year  
Warranty

Application

Hospitality Commercial Residential

## LED Wall Sconce Bar / Bath Vanity Light

Modern Contemporary Vanity

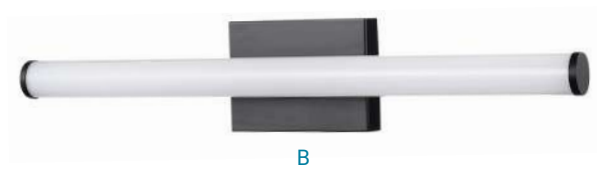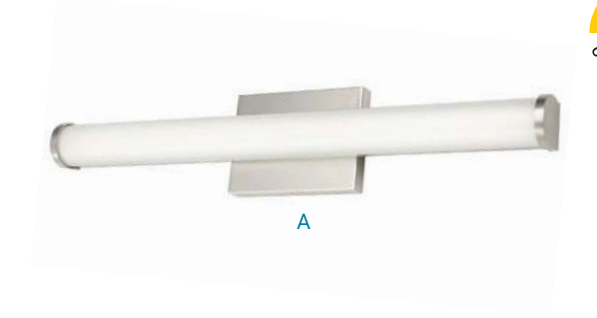

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b>	<b>18" Length   Brush Nickel</b>							
HD03143-1	LFX/BAR/20W/18"/BN/SCT	20	1400	100-277	30K/40K/50K	50000	DL,DIM	2.5(h) 18.0(w) 4.5(d)
	<b>24" Length   Black / Brush Nickel</b>							
HD03578-1	LFX/BAR/25W/24"/BN/SCT	25	1750	100-277	30K/40K/50K	50000	DL,DIM	2.5(h) 24.0(w) 4.5(d)
	<b>36" Length   Brush Nickel</b>							
HD03146-1	LFX/BAR/30W/36"/BN/SCT	30	2100	100-277	30K/40K/50K	50000	DL,DIM	2.5(h) 36.0(w) 4.5(d)
<b>B</b>	<b>24" Length   Black / Black</b>							
HD03144-1	LFX/BAR/20W/24"/BK/SCT	20	1600	100-277	30K/40K/50K	50000	DL,DIM	2.5(h) 24.0(w) 4.5(d)

Metal & Acrylic Body  
White Lens  
Chrome Finish  
80 CRI

**5**  
Year  
Warranty

Application

Hospitality Commercial Residential

## LED Wall Sconce Bar / Bath Vanity Light

Modern Contemporary Vanity



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
85119-SU	LFX/VF/18"/15W/SCT/BN	15	950	120	30K/40K/50K	50000	DL,DIM	4.25(h) 18.0(w) 3.5(d)
85094-SU	LFX/VF/24"/20W/SCT/BN	20	1300	120	30K/40K/50K	50000	DL,DIM	4.25(h) 24.0(w) 3.5(d)
85120-SU	LFX/VF/36"/30W/SCT/BN	30	1950	120	30K/40K/50K	50000	DL,DIM	4.25(h) 36.0(w) 3.5(d)

## LED Wall Sconce Bar / Bath Vanity Light

Double Band



Sunlite LED Curved Vanity Fixtures will complement any vanity, bathroom or powder room. The brushed nickel finish gives a warm and inviting look while the wide beam angle provides the perfect lighting for daily grooming tasks. Built in, long life LEDs means no bulbs to replace and up to 50,000 hours of reliable use. This dimmable fixture uses 75% less energy than traditional incandescent bulbs. And unlike fluorescent bulbs, LED lights are instant-on at full brightness with no warmup time. Install at home or as a low maintenance commercial lighting solution for hotels, offices, restaurants, retail locations and more. Save time and energy with Sunlite LED Fixtures.



**Steel & Acrylic Body**  
**White Lens**  
**Brushed Nickel / Oil Rubbed**  
**Bronze Finish**  
**81 CRI**

**Options**

- 5 Year Warranty
- Battery Backup
- Motion Sensor

*See Components list page for detail*

**Application**

- Commercial
- Residential

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>24", 36", 48" Length   Brush Nickel   Color Selectable</b>								
HD03454-1	LFX/VF/24"/25W/BN/SCT	25	2200	120-277	30K/40K/50K	50000	WL,DIM,ES	4.4(h) 24.0(w) 5.9(d)
HD03121-1	LFX/VF/36"/30W/BN/SCT	30	2600	120-277	30K/40K/50K	50000	WL,DIM,ES	4.4(h) 36.0(w) 5.9(d)
HD03119-1	LFX/VF/48"/40W/BN/SCT	40	3500	120-277	30K/40K/50K	50000	WL,DIM,ES	4.4(h) 48.0(w) 5.9(d)
<b>24", 36", 48" Length   Oil Rubbed Bronze   Color Selectable</b>								
HD03379-1	LFX/VF/24"/25W/ORB/SCT	25	2200	120-277	30K/40K/50K	50000	WL,DIM	4.4(h) 24.0(w) 5.9(d)
HD03381-1	LFX/VF/36"/30W/ORB/SCT	30	2600	120-277	30K/40K/50K	50000	WL,DIM	4.4(h) 36.0(w) 5.9(d)
HD03382-1	LFX/VF/48"/40W/ORB/SCT	40	3500	120-277	30K/40K/50K	50000	WL,DIM	4.4(h) 48.0(w) 5.9(d)

## LED Wall Sconce Bar / Bath Vanity Light

Modern Contemporary Vanity



**Steel & Acrylic Body**  
**Acrylic Lens**  
**Brushed Nickel Finish**  
**80 CRI**

**5 Year Warranty**

**Application**

- Hospitality
- Commercial
- Residential

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> 81381-SU	LFX/BAR/SQ/SG/18"/20W/3SCT/BN	20	1100	120	30K/40K/50K	50000	DL,DIM	3.5(h) 18.0(w) 5.0(d)
<b>B</b> 81341-SU	LFX/BAR/SQ/DG/18"/20W/3SCT/BN	20	1100	120	30K/40K/50K	50000	DL,DIM	6.0(h) 18.0(w) 4.0(d)

Specifications may change without notice. We are not responsible for any typographical errors



## Wall Sconce / Bath Vanity Light

### Cylinder Sconces

**BULB**  
REQUIRED



A



Up / Down



B



C

Wall Mount  
120 volts  
Medium (E26) Base  
Uses A19 Bulb(s)  
Metal Body  
UL Listed

#### Bulb Suggestion



A19  
Med E26

#### Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02696-1	FIX/VF/1LT/E26/BN/FR	Brushed Nickel	White Glass	1	60	10.0(h) 4.8(w) 5.4(d)
<b>B</b> HD02697-1	FIX/VF/2LT/E26/BN/FR	Brushed Nickel	White Glass	2	60	10.0(h) 13.0(w) 5.5(d)
<b>C</b> HD02698-1	FIX/VF/3LT/E26/BN/FR	Brushed Nickel	White Glass	3	60	10.0(h) 22.0(w) 5.5(d)

### Cone Sconces



A



B



C

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02693-1	FIX/VF/1LT/E26/BN/FR	Brushed Nickel	White Glass	1	60	9.0(h) 5.0(w) 7.0(d)
<b>B</b> HD02694-1	FIX/VF/2LT/E26/BN/FR	Brushed Nickel	White Glass	2	60	9.0(h) 16.0(w) 7.0(d)
<b>C</b> HD02695-1	FIX/VF/3LT/E26/BN/FR	Brushed Nickel	White Glass	3	60	9.0(h) 24.0(w) 7.0(d)

### Square Sconces



A



B



C

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02699-1	FIX/VF/1LT/E26/BN/FR	Brushed Nickel	White Glass	1	60	7.0(h) 5.0(w) 6.0(d)
<b>B</b> HD02700-1	FIX/VF/2LT/E26/BN/FR	Brushed Nickel	White Glass	2	60	7.0(h) 16.0(w) 6.0(d)
<b>C</b> HD02701-1	FIX/VF/3LT/E26/BN/FR	Brushed Nickel	White Glass	3	60	7.0(h) 24.0(w) 6.0(d)



# Wall Sconce / Bath Vanity Light

Decorative Sconces

**BULB**  
REQUIRED



Wall Mount  
120 volts  
Medium (E26) Base  
Uses A19 Bulb(s)  
Metal & Glass Body  
UL Listed

Bulb Suggestion



Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02327-1	FIX/FM/BATH/1LT/E26/BN/FR	Brushed Nickel	Frosted Glass	1	100	7.0(h) 5.5(w) 7.8(d)
<b>B</b> HD02328-1	FIX/FM/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	7.0(h) 6.3(w) 17.0(d)
<b>C</b> HD02329-1	FIX/FM/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	7.0(h) 6.3(w) 24.0(d)
<b>D</b> HD02330-1	FIX/FM/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	7.0(h) 6.3(w) 30.0(d)



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02251-1	FIX/SM/BATH/3LT/E26/BN/WH	Brushed Nickel	White Glass	3	100	8.5(h) 6.0(w) 24.0(d)
<b>B</b> HD02252-1	FIX/SM/BATH/4LT/E26/BN/WH	Brushed Nickel	White Glass	4	100	8.5(h) 6.0(w) 33.5(d)



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02324-1	FIX/SQ/BATH/1LT/E26/BN/FR	Brushed Nickel	Frosted Glass	1	100	4.3(h) 4.3(w) 4.3(d)
<b>B</b> HD02325-1	FIX/SQ/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	8.8(h) 5.0(w) 14.0(d)
<b>C</b> HD02326-1	FIX/SQ/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	8.8(h) 5.0(w) 20.0(d)
<b>D</b> HD02978-1	FIX/SQ/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	8.8(h) 5.0(w) 25.6(d)

120 volts  
Medium (E26) Base  
Uses A19 Bulb(s)  
Metal & Glass Body  
UL Listed  
Bulb Not Included

**Bulb Suggestion**



**Wall Sconce / Bath Vanity Light**

Classic style

**BULB  
REQUIRED**

**Application**



Up / Down



**A** Brushed Nickel    **B.C** Chrome    **D** Dusted Brown    **E** Tea Stain Glass    **F** Polished Brass

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A Brushed Nickel</b>						
HD02972-1	B214/BN/AL	Brushed Nickel	Alabaster Glass	2	60	9.5(h) 5.5(w) 14.0(d)
HD02973-1	B324U/BN/AL	Brushed Nickel	Alabaster Glass	3	60	8.3(h) 5.5(w) 24.0(d)
HD02974-1	B648D/BN/AL	Brushed Nickel	Alabaster Glass	6	60	9.5(h) 5.5(w) 48.0(d)
<b>B Chrome - Ribbed</b>						
HD02975-1	S1100E	Chrome	Frosted Glass	3	60	7.8(h) 5.5(w) 24.0(d)
<b>C Chrome</b>						
HD02976-1	B214U/CH/FR	Chrome	Frosted Glass	2	60	7.9(h) 5.5(w) 14.0(d)
HD02977-1	B324U/CH/FR	Chrome	Frosted Glass	3	60	7.9(h) 5.5(w) 24.0(d)
<b>D Dusted Brown</b>						
45485-SU	B648D/DB/AL	Dusted Brown	Alabaster Glass	6	60	9.5(h) 5.5(w) 48.0(d)
<b>E Tea Stain Glass</b>						
45492-SU	B324/DB/TS	Dusted Brown	Tea Stain Glass	3	60	9.5(h) 5.5(w) 24.0(d)
<b>F Polished Brass</b>						
45465-SU	B648D/PB/AL	Polished Brass	Alabaster Glass	6	60	9.5(h) 5.5(w) 48.0(d)



**A** Brushed Nickel    **B** Chrome



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A Brushed Nickel</b>						
HD02966-1	B318/BN	Brushed Nickel	-	3	60	4.9(h) 2.3(w) 18.0(d)
HD02967-1	B424/BN	Brushed Nickel	-	4	60	4.9(h) 2.3(w) 24.0(d)
41308-SU	B636/BN	Brushed Nickel	-	6	60	4.9(h) 2.3(w) 35.8(d)
HD02968-1	B848/BN	Brushed Nickel	-	8	60	4.9(h) 2.3(w) 48.0(d)
<b>B Chrome</b>						
HD02969-1	B318/CH	Chrome	-	3	60	4.9(h) 2.3(w) 18.0(d)
HD02970-1	B424/CH	Chrome	-	4	60	4.9(h) 2.3(w) 24.0(d)
HD02318-1	B636/CH	Chrome	-	6	60	4.8(h) 2.0(w) 36.0(d)
HD02971-1	B848/CH	Chrome	-	8	60	4.8(h) 48.0(w) 2.1(d)

## Wall Sconce

3 Lights



**BULB**  
REQUIRED

120 volts  
G9 Base  
Metal Body  
White Glass Lens  
ETL Listed  
Bulb Not Included

Bulb Suggestion



G9  
Bi Pin

Application



Hospitality



Retail



Residential

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
HD03124-1	FIX/VF/3LT/G9/AB	Black	Glass	3	4	5.0(h) 15.0(w) 5.0(d)

## Wall Sconce

Steel Swirl



**BULB**  
REQUIRED

120 volts  
G9 Base  
Metal Body  
Polished Nickel Finish  
ETL Listed  
Bulb Not Included

Bulb Suggestion



G9  
Bi Pin

Application



Hospitality



Retail



Residential

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
46059-SU	FIX/SWIRL/G9	Brushed Nickel	-	1	4	9.75(h) 4.75(w) 3.75(d)

## Wall Sconce

Rectangle



A



B



C



D

**BULB**  
REQUIRED

120 volts  
Medium (E26) Base  
Uses A19 Bulb(s)  
Aluminum Body  
ETL - Damp Location

Bulb Suggestion



A19  
Med E26

Application



Hospitality



Commercial



Residential

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02846-1	FIX/WS/E26/BLACK	Black Powder	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)
<b>B</b> HD02847-1	FIX/WS/E26/SS	Brushed Nickel	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)
<b>C</b> HD02900-1	FIX/WS/E26/BLACK	Black Powder	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)
<b>D</b> HD02901-1	FIX/WS/E26/SS	Brushed Nickel	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**

# Wall Sconce

Antique Style

**BULB**  
REQUIRED



A



B



C



D



E



F



G



Wall Mount  
120 volts  
Medium (E26) Base  
Metal Body  
UL Listed  
Bulb Not Included

Bulb Suggestion



Application




Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
A	07054-SU AQF/WCC/OB	Oil Black	Transparent Glass	1	40	10.8(h) 6.5(w) 12.0(d)
B	HD02721-1 AQF/OWC/OB	Vintage Oil Bronze	-	1	40	14.2(h) 6.5(w) 8.8(d)
C	HD02919-1 AQF/WC/AB	Antique Brass	-	1	60	10.8(h) 8.7(w) 10.3(d)
D	HD03551-1 AQF/WC/BL	Black	-	1	60	11.3(h) 4.7(w) 5.5(d)
E	HD02718-1 AQF/2WT/AB	Antique Black	-	2	60	13.1(h) 4.1(w) 11.8(d)
F	HD02899-1 AQF/WTP/IR	Black	-	1	60	18.1(h) 4.4(w) 4.6(d)
G	07076-SU AQF/PS/IR	Iron Rust	-	5	40	20.0(h) 5.0(w) 42.0(d)



# Outdoor

Light Fixtures

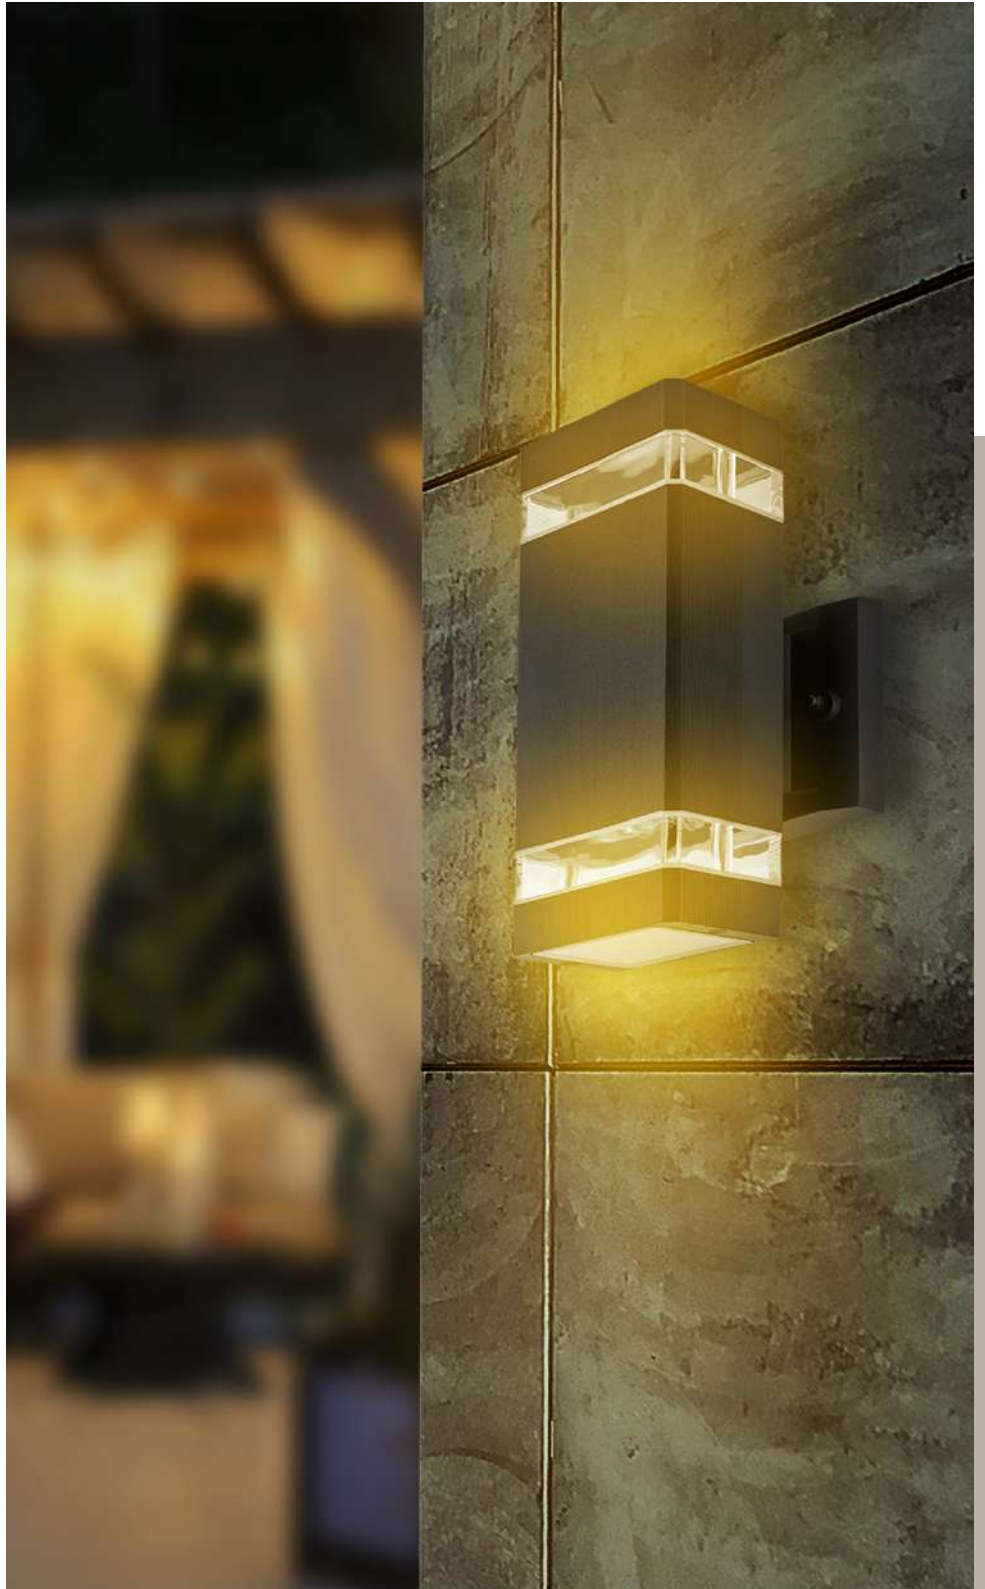

Sunlite's outdoor wall sconces provide elegant illumination. Its durable aluminum matte black finish guarantees you a long-lasting attractive light fixture that will stand the test of time. Use this fixture indoors and outdoors. It can be placed in the garage, garden, corridor, patio, hallway, balcony, or walkway. It lights up the dark and is also a beautiful decorative piece with an elegant appearance, making it a great choice!

Aluminum & Steel Body  
Glass Lens  
Black / Oil Rubbed Bronze Finish  
80 CRI

5  
Year  
Warranty

Application



## LED Outdoor Wall Sconce

### Square Cube Up & Down



Square  
(Up and Down Light)

Square  
(UP or Down Light)

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>Square Up/Down</b>								
HD03701-1	LFX/CUBE/UD/18W/SCT/BK	18	1300	120	30/40K/50K	50000	WL	4.0(h) 4.3(w) 3.5(d)
HD02850-1	LFX/CUBE/UD/18W/30K/BK	18	1300	120	3000K	50000	WL	4.0(h) 4.3(w) 3.5(d)
HD02851-1	LFX/CUBE/UD/18W/50K/BK	18	1300	120	5000K	50000	WL	4.0(h) 4.3(w) 3.5(d)
<b>Square Down</b>								
HD03700-1	LFX/CUBE/S/9W/SCT/BK	9	650	120	30/40K/50K	50000	WL	4.0(h) 4.3(w) 3.5(d)
HD02848-1	LFX/CUBE/S/9W/30K/BK	9	650	120	3000K	50000	WL	4.0(h) 4.3(w) 3.5(d)
HD02849-1	LFX/CUBE/S/9W/50K/BK	9	650	120	5000K	50000	WL	4.0(h) 4.3(w) 3.5(d)
<b>Square Down (Oil Rubbed Bronze Finish)</b>								
HD03461-1	LFX/CUBE/S/9W/30K/ORB	9	650	120	3000K	50000	WL	4.0(h) 4.3(w) 3.5(d)



Aluminum Body  
Clear Lens  
Matte Black Finish  
80 CRI

5  
Year  
Warranty

Application



## LED Outdoor Wall Sconce

### Cube Up & Down

Sunlite LED Rectangular Decorative Wall Washer Fixtures are designed to provide outdoor illumination for a variety of residential and commercial applications. These up and down light fixtures wash the wall above and below with light. They are dimmable and provide a bright 300 lumen output at a 3000K warm white color temperature. Built-in LEDs make them an energy efficient and maintenance-free lighting solution with a long life span of up to 50,000 hours. Each fixture uses only 6 watts of electricity and has an estimated yearly energy cost of \$0.72. (Based on 3 hours/day use at \$0.11/kWh) The weather-resistant aluminum body has a matte black finish. This outdoor fixture is ideal for anywhere extra lighting is needed. ETL Listed for wet location installation.



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02717-1	LFX/CUBE/6W/30K/BL/UD	6	300	120	3000K	50000	WL,DIM	7.1(h) 5.5(w) 4.1(d)



# LED Outdoor Wall Sconce

Up & Down



This Sunlite LED Decorative Wall Light fixture is as attractive as it is functional. With a weather-proof aluminum body and built-in 50,000 hour life LEDs this fixture is designed for years of efficient and maintenance free service. Matte black finish and modern design ideal for use on porches, walls, next to doors and garages, on gate posts, or any outdoor space. Hardware and instructions for mounting on any standard junction box included. ETL Listed for wet location installation.



**A**  
Round  
(Up and Down Light)



**B**  
Square  
(Up and Down Light)



**C**  
Square  
(UP or Down Light)



Aluminum Body  
Clear Lens  
Black Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b>	<b>Round Up and Down</b>							
HD03171-1	LFX/UD/R/12"/24W/BK/SCT	24	1700	120-277	30K/40K/50K	50000	WL	11.9(h) 4.3(w) 6.9(d)
<b>B</b>	<b>Square Up and Down</b>							
HD03116-1	LFX/UD/SQ/24W/SCT/MV/BK/10"	12	1700	120-277	30K/40K/50K	50000	WL	10.3(h) 3.5(w) 6.1(d)
<b>C</b>	<b>Square Up or Down</b>							
HD02716-1	LFX/D/SQ/15W/50K/BK/8"	15	1100	120	5000K	50000	WL,DIM	8.0(h) 4.5(w) 6.0(d)
88134-SU	LFX/D/SQ/8"/12W/SCT/BK	12	850	120	30K/40K/50K	50000	WL	8.1(h) 4.4(w) 6.1(d)

Sunlite's outdoor wall sconces features the perfect balance between vintage and modern aesthetics that perfectly blends in with both the high-end and everyday home's front porch/veranda, to the backyard. Its durable yet chic brushed nickel steel construction guarantees you a long lasting attractive light fixture that will stand the test of time.

Steel & Glass Body  
Clear Lens  
Brushed Nickel Finish  
81 CRI

5  
Year  
Warranty

Application



## LED Outdoor Wall Sconce

Cylinder Up & Down

LED  
BUILT-IN



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A	HD02575-1 LFX/DOD/T/6/12W/D/30K	12	800	120	3000K	50000	WL,DIM	6.1(h) 4.3(w) 4.3(d)
B	HD03169-1 LFX/DOD/T/8/24W/D/30K	24	1600	120	3000K	50000	WL,DIM	8.3(h) 4.5(w) 2.8(d)



Metal Body  
Crystal Glass Lens  
Black Finish  
80 CRI

5  
Year  
Warranty

Application



## LED Outdoor Wall Sconce

Crystal Glass Design

LED  
BUILT-IN



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81038-SU	LFX/WS/XTL/12"/10W/SCT/BK	10	800	120	30K/40K/50K	50000	DL,DIM	11.0(h) 5.5(w) 3.0(d)

## LED Outdoor Wall Sconce

### Cylinder Up & Down



This Sunlite LED Decorative Wall Light fixture is as attractive as it is functional. With a weather-proof aluminum body and built-in 50,000 hour life LEDs this fixture is designed for years of efficient and maintenance free service. Matte black finish and modern design ideal for use on porches, walls, next to doors and garages, on gate posts, or any outdoor space. Hardware and instructions for mounting on any standard junction box included. ETL Listed for wet location installation. These Energy Star Certified fixtures may qualify you for state and local energy rebates.

Aluminum Body  
Clear Lens  
Black Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>Up/Down   Color Selectable</b>								
<b>D</b>	HD03432-1 LFX/UD/HC/12W/MV/SCT/BK	12	1200	120-277	30K/40K/50K	50000	WL,DIM	9.25(h) 4.5(w) 5.25(d)
<b>E</b>	HD03433-1 LFX/UD/REC/12W/MV/SCT/BK	12	1200	120-277	30K/40K/50K	50000	WL,DIM	9.13(h) 4.5(w) 5.25(d)

## LED Outdoor Wall Sconce

### Seedy Glass Design



Aluminum Body  
Clear Seedy Lens  
Black Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b>	81039-SU LFX/WS/SEEDY/UD/12"/22W/30K/BK	22	300	120	3000K	50000	WL,DIM	7.0(h) 5.0(w) 1.5(d)
<b>B</b>	81040-SU LFX/WS/SEEDY/UD/12"/22W/30K/BK	22	300	120	3000K	50000	WL,DIM	7.0(h) 5.0(w) 1.5(d)

## LED Outdoor Wall Sconce

### Seedy Glass Design

With built in LED lights this Sunlite wall sconce is designed to provide years of maintenance-free use in residential or commercial locations. The elegant metal body with matte black finish holds a unique raindrop glass panel. The hidden LEDs refract through the drops in the panel creating a brilliant and peaceful glow. Designed for indoor or outdoor installation. This stylish and practical fixture is ideal for illuminating foyers, entrance ways, common areas, and balconies. The ADA Compliant design allows for installation in commercial and public spaces requiring handicapped accessibility. ETL Listed for wet location installation. Mounting hardware and installation instructions included.



Glass Body  
Clear Seedy Lens  
Black Finish  
80 CRI

5  
Year  
Warranty

#### Application



Hospitality



Retail



Commercial



Residential




A



B



C

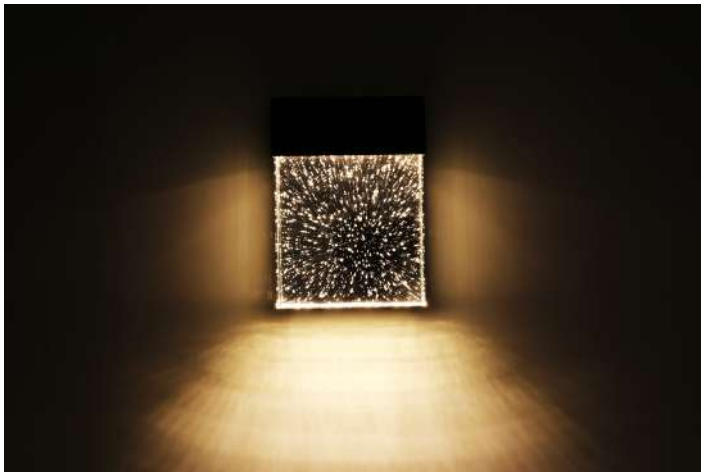

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A 5" Width</b>								
<b>B</b> 81046-SU	LFX/WS/SEEDY/UD/12"/11W/30K/BK	11	600	120	3000K	50000	WL,DIM	7.0(h) 5.0(w) 1.5(d)
HD02380-1	LFX/INN/WS/5"/9W/30K/BK/SEEDY	9	450	120	3000K	50000	WL	13.8(h) 4.8(w) 2.5(d)
HD02381-1	LFX/INN/WS/5"/9W/50K/BK/SEEDY	9	450	100-277	5000K	50000	WL	13.8(h) 4.8(w) 2.5(d)
81047-SU	LFX/INN/WS/5"/12W/SCT/BK/SEEDY	12	600	120	30K/40K/50K	50000	WL	13.8(h) 4.8(w) 2.5(d)
<b>C 6.5" Width</b>								
81051-SU	LFX/INN/WS/6.5"/12W/SCT/BK/SEEDY	12	600	120	30K/40K/50K	50000	WL	13.8(h) 6.5(w) 2.5(d)
HD02382-1	LFX/INN/WS/6.5"/12W/30K/BK/SEEDY	12	600	100-277	3000K	50000	WL	13.8(h) 6.5(w) 2.5(d)
HD02383-1	LFX/INN/WS/6.5"/12W/50K/BK/SEEDY	12	600	100-277	5000K	50000	WL	13.8(h) 6.5(w) 2.5(d)



# LED Outdoor Wall Sconce

Seedy Glass Design



A



Aluminum Body  
Clear Seedy Lens  
Black Finish  
80 CRI

5  
Year  
Warranty

Application



Hospitality Commercial Residential



B



C



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> 81041-SU	LFX/WS/SEEDY/CYL/12"/10W/SCT/BK	10	600	120	30K/40K/50K	50000	WL,DIM	12.0(h) 4.75(w) 4.0(d)
<b>B</b> 81330-SU	LFX/WS/CL/10W/CR190/3SCT/BK	15	800	120	30K/40K/50K	50000	WL,DIM	12.0(h) 5.5(w) 4.0(d)
<b>C</b> HD02578-1	LFX/TERR/WS/4"/12W/30K/ORB/SEEDY	12	500	120	3000K	50000	WL,DIM	14.0(h) 4.8(w) 4.3(d)
HD02579-1	LFX/TERR/WS/4"/12W/50K/ORB/SEEDY	12	500	120	5000K	50000	WL,DIM	14.0(h) 4.8(w) 4.3(d)

# LED Outdoor Wall Sconce

## Contemporary Style



Aluminum Body  
Acrylic Lens  
Black / White Finish  
90 CRI

3  
Year  
Warranty

Application



A



B



C



D



E



F



G



H



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A	85104-SU LFX/WS/R/12W/SCT/BK	12	850	120	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
B	85105-SU LFX/WS/R/12W/SCT/WH	12	850	120	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
C	85106-SU LFX/WS/RC/12W/SCT/BK	12	850	120	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
D	85109-SU LFX/WS/RC/12W/SCT/WH	12	850	120	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
E	85113-SU LFX/WS/SQC/12W/SCT/BK	12	850	120	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)
F	85114-SU LFX/WS/SQC/12W/SCT/WH	12	850	120	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)
G	85110-SU LFX/WS/SQ/12W/SCT/BK	12	850	120	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)
H	85112-SU LFX/WS/SQ/12W/SCT/WH	12	850	120	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)



## LED Outdoor Wall Sconce

Contemporary Style



A



B



Add a modern touch to any home or business with this Sunlite LED wall sconce. The contemporary design oil rubbed bronze frame holds an opaque white polycarbonate lens. Built in LEDs makes this a no maintenance lighting solution for home or commercial use. Suitable for indoor or outdoor use, this attractive fixture will provide up to 50,000 hours of reliable service. Mounting bracket, screws, wire nuts and installation instructions are included.

Metal Body  
White Lens  
Silver / Oil Rubbed Bronze Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A 8" Height</b>								
HD03172-1	LFX/CONT/WS/8"/12W/SCT/ORB/ACRY	12	600	100-277	30K/40K/50K	50000	WL	8.0(h) 6.0(w) 4.0(d)
HD03173-1	LFX/CONT/WS/8"/12W/SCT/SL/ACRY	12	600	100-277	30K/40K/50K	50000	WL	8.0(h) 6.0(w) 4.0(d)
<b>B 14" Height</b>								
HD03174-1	LFX/CONT/WS/14"/20W/SCT/SL/ACRY	20	1100	100-277	30K/40K/50K	50000	WL	14.0(h) 5.9(w) 3.2(d)
HD03268-1	LFX/CONT/WS/14"/20W/SCT/ORB/ACRY	20	1100	100-277	30K/40K/50K	50000	WL	14.0(h) 5.9(w) 3.2(d)

## LED Outdoor Wall Sconce

Contemporary Design



Metal Body  
White Glass Lens  
Black Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81032-SU	LFX/WS/KNOB/15W/30K/BK	15	800	120	3000K	50000	WLL,DIM	12.0(h) 5.5(w) 4.0(d)

## LED Outdoor Wall Sconce

Half Cylinder




Aluminum & Plastic Body  
White Lens  
Oil Rubbed Bronze Finish  
81 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03134-1	LFX/HC/ORB/15W/SCT	15	950	120	30K/40K/50K	50000	WL,DIM,ES	10.0(h) 7.0(w) 3.0(d)

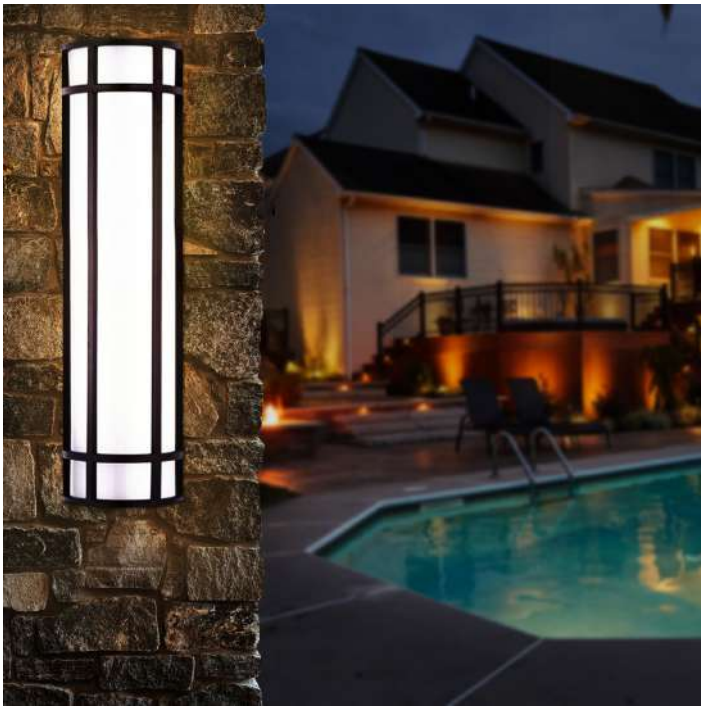

## LED Outdoor Wall Sconce

Vintage Style



Add a classic touch to any home or business with these Sunlite LED Wall Sconces. The Mission-style design black metal frame holds an opaque white lens. Built in LEDs makes this a no maintenance lighting solution for home or commercial use. Suitable for indoor or outdoor use. Available in four sizes from 12 to 30 inches. Mounting hardware, screws, wire nuts and installation instructions are included.

Metal Body  
White Lens  
Black Finish  
80 CRI

Options

5  
Year  
Warranty



See Components list page for detail

Application



A  
12"



B  
18"



C  
24"



D  
30"

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A 12" Height</b>								
81434-SU	LFX/AQ/WS/12"/15W/SCT/BK/ACRY	15	800	100-277	30K/40K/50K	50000	WL	12.0(h) 6.0(w) 4.0(d)
HD02373-1	LFX/AQ/WS/12"/15W/30K/BK/ACRY	15	800	100-277	3000K	50000	WL	12.0(h) 6.0(w) 4.0(d)
HD02374-1	LFX/AQ/WS/12"/15W/50K/BK/ACRY	15	800	100-277	5000K	50000	WL	12.0(h) 6.0(w) 4.0(d)
<b>B 18" Height</b>								
HD03301-1	LFX/AQ/WS/18"/20W/SCT/BK/ACRY	20	1000	100-277	30K/40K/50K	50000	WL	18.0(h) 6.0(w) 4.0(d)
<b>C 24" Height</b>								
HD02377-1	LFX/AQ/WS/24"/23W/30K/BK/ACRY	23	1200	100-277	3000K	50000	WL	24.0(h) 6.0(w) 4.0(d)
HD03117-1	LFX/AQ/WS/24"/23W/SCT/BK/ACRY	23	1200	100-277	30K/40K/50K	50000	WL	24.0(h) 6.0(w) 4.0(d)
<b>D 30" Height</b>								
HD03118-1	LFX/AQ/WS/30"/28W/SCT/BRZ/ACRY	28	1400	100-277	30K/40K/50K	50000	WL	30.0(h) 6.0(w) 4.0(d)

# LED Outdoor Wall Sconce


Vintage Style



Add a classic touch to any home or business with these Sunlite Tunable LED Wall Fixtures. These tunable fixtures feature innovative technology that allows you to choose the color temperature at the time of installation. Select 3000K Warm White, 4000K Cool White, or 5000K Super White depending on your preference using a switch located on the back. With energy efficient LEDs these are a maintenance lighting solution for residential or commercial use. Long 50,000 hour lifespan for years of maintenance-free service. ETL Listed for wet location installation.



Aluminum & Steel Body  
White Lens  
Black Finish  
Built-in Photocell  
80 CRI



Application



## Built-in Sensor



A



B



C



D



E



F

## Without Sensor



G



H



I

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b>	HD02775-1 LFX/WS/SCT/HC/12W/BK/PC	12	800	120	30K/40K/50K	50000	WL	10.0(h) 10.3(w) 4.0(d)
<b>B</b>	HD02778-1 LFX/WS/SCT/RT/12W/TG/BK/PC	12	800	120	30K/40K/50K	50000	WL	9.4(h) 8.5(w) 5.0(d)
<b>C</b>	HD02773-1 LFX/WS/SCT/HH/12W/BK/PC	12	800	120	30K/40K/50K	50000	WL	12.1(h) 8.0(w) 5.7(d)
<b>D</b>	HD02774-1 LFX/WS/SCT/HO/12W/BK/PC	12	800	120	30K/40K/50K	50000	WL	9.8(h) 7.8(w) 4.1(d)
<b>E</b>	HD02776-1 LFX/WS/SCT/RT/12W/SG/BK/PC	12	800	120	30K/40K/50K	50000	WL	9.5(h) 8.0(w) 4.5(d)
<b>F</b>	HD02779-1 LFX/WS/SCT/LN/9W/BK/PC	9	600	120	30K/40K/50K	50000	WL	11.8(h) 6.1(w) 8.1(d)
<b>Without Sensor</b>								
<b>G</b>	HD02777-1 LFX/WS/SCT/LN/12W/BK	12	800	120	30K/40K/50K	50000	WL	8.7(h) 8.8(w) 10.3(d)
<b>H</b>	HD02780-1 LFX/WS/SCT/HCL/9W/GL/BK	9	600	120	30K/40K/50K	50000	WL	9.8(h) 7.3(w) 3.7(d)
<b>I</b>	HD03459-1 LFX/WS/CL/9W/MV/SCT/BK	9	900	120	30K/40K/50K	50000	WL	13.8(h) 7.3(w) 9.5(d)

Specifications may change without notice. We are not responsible for any typographical errors

Steel Body  
Amber Lens  
Copper Bronze Finish  
81 CRI

5  
Year  
Warranty

Application



## LED Outdoor Wall Sconce

### Wall Lantern Design

LED  
BUILT-IN



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02573-1	LFX/DOD/L/6/12W/30K	12	400	120	3000K	35000	WL	12.5(h) 6.0(w) 7.5(d)
HD02574-1	LFX/DOD/L/8/15W/30K	15	500	120	3000K	35000	WL	16.0(h) 4.5(w) 9.0(d)

Aluminum Body  
White Lens  
Black Finish  
80 CRI

5  
Year  
Warranty

Application



## LED Outdoor Wall Sconce

### Porch Lighting

LED  
BUILT-IN



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
85103-SU	LFX/BH/12W/SCT/BK	12	650	120	30K/40K/50K	50000	WL,	11.8(h)7.4(w) 3.7(d)

Sunlite's LED Carriage Style wall mounted fixture adds personality outdoor areas. This maintenance-free light has a long 50,000 hour life span.

Polycarbonate Body  
White Lens  
Black Finish  
74 CRI

3  
Year  
Warranty

Application



## LED Outdoor Wall Sconce

### Carriage Design

LED  
BUILT-IN

Polycarbonate



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> HD03302-1	LFX/DOD/CS/BK/WH/40K	11.3	912	120-277	4000K	50000	WL,ES	8.7(h) 6.9(w) 5.9(d)
<b>B</b> 49014-SU	LFX/DOD/CS/WH/WH/40K	11.3	912	120-277	4000K	50000	WL,ES	8.7(h) 6.9(w) 5.9(d)



## LED Outdoor Wall Sconce

Round And Oval Euro Design

Polycarbonate

LED  
BUILT-IN

Sunlite's LED decorative outdoor DOD Eurostyle wall mounted fixtures add personality outdoor areas. These maintenance-free lights have a long 50,000 hour life span.



A



B



C



Polycarbonate Body  
White Lens  
Black / White Finish  
74 CRI

3  
Year  
Warranty

Application



Landscape



Commercial



Residential

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
A	49000-SU LFX/DOD/EBL/BK/FR/40K	11.3	1000	120	4000K	50000	WL,ES	5.0(h) 6.0(w) 10.0(d)
B	49002-SU LFX/DOD/EBL/WH/FR/120V/40K	11.3	1280	120	4000K	50000	WL,ES	5.0(h) 6.0(w) 10.0(d)
C	HD03303-1 LFX/DOD/EL/BK/FR/120V/40K	23	1900	120	4000K	50000	WL,ES	5.4(w) 10.0(d)

## Outdoor Wall Sconce

Nautical Style

BULB  
REQUIRED

Polycarbonate

Wall Mount  
120 volts  
Medium (E26) Base  
Uses A19 Bulb  
Polycarbonate Body  
UL Listed - Wet Location

Bulb Suggestion



A19  
Med E26

Application



Commercial



Residential



A



B



White Acrylic

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
A	HD02239-1 DOD/NC/BK/CL/MED	Black	White Acrylic	1	60	13.0(h) 11.0(w) 10.1(d)
B	HD02238-1 DOD/NC/WH/CL/MED	White	White Acrylic	1	60	11.0(h) 11.0(w) 10.1(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**





**Pole Mount**  
 120 volts  
 Medium (E26) Base  
 Uses A19 Bulb  
 Polycarbonate Body  
 UL Listed - Wet Location

**Bulb Suggestion**



A19  
Med E26



A19  
GU24

**Application**




## Outdoor Wall Sconce

Orchid Style Collection

**BULB**  
REQUIRED

 Polycarbonate



Down Fixture




Up Fixture

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b>	<b>Down Fixture Medium Base</b>					
47222-SU	DOD/ORD/WH/CL/MED	White	Clear Acrylic	1	60	10.5(h) 6.5(w) 6.5(d)
	<b>Down Fixture GU24 Base</b>					
HD02824-1	DOD/ORD/WH/FR/GU24	White	White Acrylic	1	18	10.5(h) 6.5(w) 6.5(d)
<b>B</b>	<b>Up Fixture Medium Base</b>					
47226-SU	DOD/ORU/WH/CL/MED	White	Clear Acrylic	1	60	16.0(h) 8.0(w) 8.0(d)
	<b>Up Fixture GU24 Base</b>					
HD02827-1	DOD/ORU/WH/FR/GU24	White	White Acrylic	1	18	16.0(h) 8.0(w) 8.0(d)



120 volts  
 Medium (E26) Base  
 Uses A19 Bulb(s)  
 Metal & Glass Body  
 UL Listed

**Bulb Suggestion**



A19  
Med E26

**Application**

## Outdoor Wall Mount Fixture

Carriage & Coach Style Collection

**BULB**  
REQUIRED



**A**  
Up Style



**B**  
Down Style

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)	
<b>A</b>	HD02816-1	ODI1130/BK	Black	Clear Glass	1	60	14.0(h) 6.0(w) 7.8(d)
<b>B</b>	HD02812-1	ODI1120/WH	White	Clear Glass	1	60	16.4(h) 6.3(w) 7.5(d)

## Outdoor Wall Mount Fixture

### Buckhead



**BULB**  
REQUIRED

120 volts  
Metal & Glass Body  
UL Listed

#### Bulb Suggestion



#### Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> HD02781-1	ODI1020/BK	Black	Frosted Glass	1	100	12.0(h) 4.1(w) 4.4(d)
<b>B</b> HD02782-1	ODI1030/WH	White	Frosted Glass	1	100	8.7(h) 4.1(w) 4.4(d)

## Outdoor Wall Mount Fixture

### Modern Style



**BULB**  
REQUIRED

120 volts  
Medium (E26) Base  
Metal Body  
Black Finish  
ETL Listed

#### Bulb Suggestion



#### Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
HD03554-1	FIX/CWS/E26/BK	Black	-	1	75	4.38(h) 7.25(w) 7.0(d)

## Outdoor Wall Mount Fixture

### Globe / Jar Style



**BULB**  
REQUIRED

120 volts  
Med (E26) / G24q1 Base  
Metal & Glass Body  
UL Listed  
Application

#### Bulb Suggestion



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>Medium Base</b>						
<b>A</b> HD02813-1	ODI1040/BK/E26	Black	Clear Glass	1	100	7.5(h) 4.5(w) 5.8(d)
<b>B</b> HD02814-1	ODI1050/WH/E26	White	Clear Glass	1	100	7.5(h) 4.5(w) 5.8(d)
<b>C</b> 47000-SU	ODI1000/BK/E26	Black	White Glass	1	60	7.7(h) 6.0(w) 6.7(d)
<b>G24q1 Base   CFL Bulb Included</b>						
<b>D</b> HD02787-1	ODF1015/WH	White	White Glass	1	13 PLD	7.7(h) 6.0(w) 6.9(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**

## LED Outdoor Gooseneck Fixture

Wall Mount

LED  
BUILT-IN



The Sunlite LED Gooseneck Barn Fixture brings a rustic design element to your home or business. No bulbs to replace. Built-in LEDs with a 50,000 hour life span makes this a maintenance-free lighting solution for years to come. This weather-proof outdoor fixture is ETL Listed for wet location installation, but can also be installed indoors for a rustic farmhouse look. It's finished in matte black and can be installed on any standard junction box. This fixture is dimmable when attached to a compatible dimmer. Light output is 3000K (warm white) at 700 lumens using only 12 watts of electricity. Estimated Annual Energy Cost is \$1.45 based on 3 hours/day use at \$0.11/kWh. Fixture measures 15.38 in (H), 11 in (W), 12 in (D).

Steel Body  
Matte Black Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02908-1	LFX/GN/12W/30/BK	12	700	120	3000K	50000	WL,DIM	15.0(w) 12.0(d)

120 volts  
Medium (E26) Base  
Uses A19 Bulb(s)  
Metal Body  
UL Listed - Wet Location  
Bulb Not Included

Bulb Suggestion



## Outdoor Gooseneck Fixture

Wall Mount

BULB  
REQUIRED

Application



A



B



C



D

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
A HD02240-1	FIX/GN/E26/BLACK	Black	-	1	60	11.5(h) 12.0(w) 15.0(d)
B HD02821-1	FIX/GN/E26/RED	Red	-	1	60	11.5(h) 12.0(w) 15.0(d)
C HD02241-1	FIX/GN/E26/WHITE	White	-	1	60	11.5(h) 12.0(w) 15.0(d)
D 46066-SU	FIX/GN/E26/ORB	Oil Rubbed Bronze	-	1	60	11.5(h) 12.0(w) 15.0(d)

## LED Outdoor Security Flood Light

Motion Sensor



SunliteLED Wall Mount Floodlight fixtures provide ample illumination for all outdoor spaces. Dual heads can be adjusted individually to optimize coverage area. Built-in motion sensor activates lights when movement is detected. Long life, LED technology built-in means no bulbs to replace and up to 35,000 hours of maintenance-free service. ETL Listed for wet location installation and IP65 rated.

Plastic Body  
Clear Lens  
Black Finish  
Built-in Photocell & Motion Sensor  
80 CRI




Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2 Head Round   Style 1</b>								
<b>A</b>	HD02891-1 LFX/OSF/R/MS/20W/50K/BK	20	1800	120	5000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
<b>B</b>	HD02892-1 LFX/OSF/R/MS/20W/50K/WH	20	1800	120	5000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
<b>2 Head Round   Style 2</b>								
<b>C</b>	HD03702-1 LFX/OSF/R/MS/20W/30K/BK	20	1800	120	3000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
<b>D</b>	HD03703-1 LFX/OSF/R/MS/20W/30K/WH	20	1800	120	3000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
<b>E 2 Head Square</b>								
	HD02893-1 LFX/OSF/S/MS/24W/30K/BK	24	2400	120	3000K	35000	WL	11.9(h) 6.1(w) 5.9(d)
	HD02894-1 LFX/OSF/S/MS/24W/50K/BK	24	2400	120	5000K	35000	WL	11.9(h) 6.1(w) 5.9(d)

## Outdoor Security Flood Light



120 volts  
Medium (E26) Base  
Uses PAR38 Bulb(s)  
UL Listed

Bulb Suggestion



Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
HD02759-1	PL2H/WH	White	-	2	60	4.3(h) 4.3(w) 8.5(d)

Specifications may change without notice. We are not responsible for any typographical errors

# Outdoor Post Mounted Fixture

Globe Style

**BULB**  
REQUIRED

 Polycarbonate



Pole Mount  
120 volts  
Medium (E26) Base  
Uses A19 Bulb  
Polycarbonate Body  
UL Listed - Wet Location  
Fit Most 3" Diameter Posts (Not Included)

### Bulb Suggestion



### Application



A



B



C



D



E



F



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>10" Inch</b>						
<b>A</b> HD02743-1	DOD/10GL/BK/WH/MED	Black	White Acrylic	1	100	12.8(w) 10.0(d)
<b>B</b> HD02741-1	DOD/10GL/WH/WH/MED	White	White Acrylic	1	100	12.8(w) 10.0(d)
<b>C</b> HD02742-1	DOD/10GL/BK/CL/MED	Black	Clear Acrylic	1	100	12.8(w) 10.0(d)
<b>12" Inch</b>						
<b>D</b> HD02201-1	DOD/12GL/BK/WH/MED	White	White Acrylic	1	100	12.0(w) 12.0(d)
<b>E</b> HD02200-1	DOD/12GL/WH/WH/MED	Black	White Acrylic	1	100	12.0(w) 12.0(d)
<b>F</b> HD02202-1	DOD/12GL/BK/CL/MED	Black	Clear Acrylic	1	100	12.0(w) 12.0(d)



## Outdoor Post Mounted Fixture

### Orchid Style Collection



**BULB**  
REQUIRED

120 volts  
Medium (E26) Base  
Uses A19 Bulb  
Polycarbonate Body  
UL Listed - Wet Location  
Fit Most 3" Diameter Posts (Not Included)

#### Bulb Suggestion



#### Application



Clear Acrylic



White Acrylic

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>Medium Base</b>						
HD02883-1	DOD/ORP/BK/CL/MED	Black	Clear Acrylic	1	60	16.0(h) 8.0(w) 8.0(d)
HD02884-1	DOD/ORP/WH/CL/MED	White	Clear Acrylic	1	60	16.0(h) 8.0(w) 8.0(d)
<b>GU24 Base</b>						
48220-SU	DOD/ORP/BK/FR/GU24	Black	White Acrylic	1	18	16.0(h) 8.0(w) 8.0(d)
48222-SU	DOD/ORP/WH/FR/GU24	White	White Acrylic	1	18	16.0(h) 8.0(w) 8.0(d)

## Outdoor Post Mounted Fixture

### Carriage & Coach Style Collection



A



B

**BULB**  
REQUIRED

120 volts  
Medium (E26) Base  
Uses A19 Bulb(s)  
Metal & Glass Body  
UL Listed  
Fit Most 3" Diameter Posts (Not Included)

#### Bulb Suggestion



#### Application



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b> 41322-SU	ODI1150/BK	Black	Clear Glass	1	60	12.4(h) 5.9(w) 5.9(d)
<b>B</b> HD02261-1	ODI1160/WH	White	Clear Glass	1	60	12.1(h) 5.9(w) 5.9(d)



## LED Outdoor Ceiling Flush Mount Octagonal Design



Aluminum Body  
Frosted Lens  
Black Finish  
80 CRI

5  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03151-1	LFX/OOF/17W/SCT/BK	17	800	120	30K/40K/50K	50000	WL,DIM	4.75(w) 12(d)

Polycarbonate Body  
White Lens  
Black / White Finish  
80 CRI

3  
Year  
Warranty

Application



## LED Outdoor Ceiling Flush Mount Polycarbonate



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
48246-SU	LFX/DOD/PTR/WH/WH/E/14W/40K	14	1400	120	4000K	50000	WL,DIM,ES	4.7(w) 8.8(d)

120 volts  
GU24 Base  
Uses CFL / LED Bulbs  
Polycarbonate Body  
UL Listed - Wet Location  
Lamp(s) Included

Bulb Suggestion



A19  
GU 24

Application



## Outdoor Ceiling Flush Mount Polycarbonate



A

B

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
A 48216-SU	DOD/PTR/BK/WH/GU24	Black	White Acrylic	2	18	4.3(h) 9.4(w) 9.4(d)
B HD02822-1	DOD/PTS/BK/WH/GU24	Black	White Acrylic	2	18	4.5(h) 10.0(w) 10.0(d)



**Cone reflector achieves ideal broad light distribution with low glare**

Aluminum & Polycarbonate Body  
Clear Lens  
Oxidation Treatment Finish  
80 CRI  
IP65 Rated Weather Proof


**5**  
Year  
Warranty

Application

Landscape
 Roadway
 Commercial

## LED Bollard Garden Pathway Series

Exterior Surface



A



B



Mounting Hardware Included

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> HD02898-1	LFX/LBF/R/MW/SCT	12/16/22	2970	120-277	30K/40K/50K	50000	WL,DIM	42.1(h) 6.3(d)
<b>B</b> HD02897-1	LFX/LBF/S/MW/SCT	12/16/22	2750	120-277	30K/40K/50K	50000	WL,DIM	42.1(h) 6.3(w)

**Aluminum Body**  
Clear Lens  
Bronze Finish  
80 CRI


**Options**  
5 Year Warranty  
Battery Backup  
Motion Sensor  
*See Components list page for detail*

**Application**  
Industrial Commercial Residential

## LED Outdoor Wall Mount Series

### Wall Pack

Sunlite LED Large Wall Pack fixtures are designed to provide ample outdoor illumination. The weather-resistant metal body is finished in bronze and houses a durable glass lens. Ideal for security and general purpose lighting along the perimeter of buildings, entryways or anywhere extra lighting is needed. For use with 120-277 volt electrical service. ETL Listed for safety and design.



#### Photocell

97091-SU Photocell



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03153-1	LFX/WP/SCT/MW/MV	25/40/60/80	3250/5200/7800/10400	120-277	30K/40K/50K	50000	WL,DIM,DLC	9.2(h) 14.3(w) 7.5(d)
HD03152-1	LFX/WP/SCT/HMW/MV	60/80/100/120	7800/10400/13000/15600	120-277	30K/40K/50K	50000	WL,DIM,DLC	9.2(h) 14.3(w) 7.5(d)
HD02427-1	LFX/WP/25W/MV/D/50K	25	3250	120-277	5000K	50000	WL,DIM,DLC	9.2(h) 14.3(w) 7.5(d)
HD02428-1	LFX/WP/40W/MV/D/40K	40	4641	120-277	4000K	50000	WL,DIM,DLC	9.0(h) 14.0(w) 7.7(d)

Sunlite's LED slim profile wall pack was designed as a maintenance-free, energy-efficient alternative to fluorescent, high-pressure sodium, and metal halide fixtures. It provides uniform illumination while providing a comfortable visual experience. Perfect for outdoor lighting applications, including garages, hotels, commercial buildings, schools, and hospitals. Its die-cast aluminum housing features a bronze finish and polycarbonate lens.


**Aluminum Body**  
Clear Lens  
Bronze Finish  
70 CRI

**Options**  
5 Year Warranty  
Photocell  
*See Components list page for detail*

**Application**  
Industrial Commercial Residential

## LED Outdoor Wall Mount Series

### Cut Off Wall Pack



#### Photocell

97091-SU Photocell




Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
97064-SU	LFX/WP/MW/3SCT	25/40/60/80	3250/5200/7800/10400	120-277	30K/40K/50K	50000	DIM,WL,DLC	8.3(h) 14.4(w) 9.2(d)
HD02902-1	LFX/WP/60W/MV/50K	60	7980	120-277	5000K	50000	DIM,WL,DLC	8.3(h) 14.4(w) 9.2(d)
HD02658-1	LFX/WP/80W/MV/50K	80	10640	120-277	5000K	50000	DIM,WL,DLC	8.3(h) 14.4(w) 9.2(d)



## LED Outdoor Wall Mount Series

### Rotatable Wall Pack

Sunlite LED Rotatable Wall Pack fixtures are designed to provide ample outdoor illumination with an adjustable light bank allowing you to direct the light for optimal coverage. The weather-resistant aluminum body is finished in black and houses a durable polycarbonate lens. Ideal for security and general purpose lighting along the perimeter of buildings, entryways or anywhere extra lighting is needed. For use with 100-277 volt electrical service. UL Listed for wet location installation and DLC Listed for quality and efficiency.



Aluminum Body  
Clear Lens  
Black Finish  
70 CRI

Options



See Components list page for detail

Application



Industrial Commercial Residential



A



B

Rotate 270 Degrees to allow you to customize your range of light



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> HD02386-1	LFX/RWP/40W/50K	40	5200	100-277	5000K	50000	WL,DLC	5.3(h) 5.4(w) 9.2(d)
<b>B</b> HD02387-1	LFX/RWP/60W/50K	60	7800	100-277	5000K	50000	WL,DIM,DLC	9.4(h) 5.9(w) 10.0(d)
97095-SU	LFX/RWP/80W/3SCT	80	10640	100-277	30/40k/50K	50000	WL,DIM,DLC	5.3(h) 8.7(w) 9.2(d)

## LED Outdoor Wall Mount Series

### Bulkhead



Aluminum Body  
Frosted Lens  
Textured Black Finish  
80 CRI



Application



Landscape Commercial Residential



A Cut-Off



B Round

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> Cut-Off								
HD02895-1	LFX/BOF/12W/30K/BK	12	600	120	3000K	50000	WL,DIM	3.6(w) 11.0(d)
<b>B</b> Round								
81384-SU	LFX/BH/20W/3SCT/BK	20	1000	120	30K/40K/50K	50000	WL,DIM	3.6(w) 11.0(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**



Aluminum Body  
Frosted Lens  
Bronze Finish  
Built-in Photocell  
70 CRI



Application



## LED Outdoor Wall Mount Mini Wall Pack



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
85123-SU	LFX/MWP/MW/SCT/ORB	8/15/25	1120/2050/3250	120-277	30K/40K/50K	50000	WL,DLC	8.2(h) 5.5(w) 3.4(d)

Aluminum Body  
Clear Lens  
Bronze Finish  
Built-in Photocell  
80 CRI



Application



## LED Outdoor Wall Mount Mini Wall Pack



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02903-1	LFX/MWP/SCT/15W/PC	15	1800	100-277	30K/40K/50K	50000	WL,DIM	8.6(h) 5.8(w) 3.1(d)
HD03391-1	LFX/MWP/SCT/30W/PC	30	3900	100-277	30K/40K/50K	50000	WL,DIM	8.6(h) 5.8(w) 3.1(d)

Sunlite LED Slim Wall Pack Fixtures are designed to provide ample outdoor illumination. A built in photocell provides Dusk to Dawn lighting automatically. The weather-resistant steel and aluminum body is finished in black and houses a durable polycarbonate lens. Ideal for security and general purpose lighting along the perimeter of buildings, entryways or anywhere extra lighting is needed. For use outdoors with 120 volt electrical service.

Aluminum Body  
White Lens  
Black Finish  
Built-in Photocell  
80 CRI



Application



## LED Outdoor Wall Mount LED Mini Wall Pack



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02886-1	LFX/TP/12W/SCT/PC	12	850	120	30K/40K/50K	50000	WL	8.6(h) 5.3(w) 2.1(d)

## LED Outdoor Wall Mount

### Adjustable Bracket Down Wall Pack



A



Sunlite LED Slim Profile Downlight fixtures are designed to provide ample outdoor illumination. These wall mount fixtures put out a bright 5000K Super White color temperature. An adjustable base allows you to direct the light for optimal coverage. It is an energy-efficient and maintenance-free lighting solution with built-in LEDs with a long life span of up to 50,000 hours. The weather-resistant aluminum body is finished in bronze. Ideal for security and general-purpose lighting along the perimeter of buildings, entryways, or anywhere extra lighting is needed. For use with 120-277 volt electrical service. ETL Listed for wet location installation.

Aluminum Body  
Clear Lens  
Bronze Finish  
70 CRI

Options



See Components list page for detail

Application



B

C

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> 49169-SU	LFX/SWP/MW/SCT/BRZ	21/28/35	2730/3640/4550	120-347	30K/40K/50K	50000	WL,DLC	8.1(h) 6.5(w) 3.9(d)
49173-SU	LFX/SWP/HMW/SCT/BRZ	30/40/50	3900/5200/6500	120-347	30K/40K/50K	50000	WL,DLC	10.9(h) 8.5(w) 4.9(d)
<b>B</b> HD02889-1	LFX/SWP/75W/BZ/50K	75	8625	120-277	5000K	50000	WL,DLC	10.4(h) 9.6(w) 4.3(d)
<b>C</b> HD02890-1	LFX/SWP/75W/WH/50K	75	8625	120-277	5000K	50000	WL,DLC	10.4(h) 9.6(w) 4.3(d)

## LED Outdoor Floodlight

### Outdoor Area Light



Sunlite's LED street light fixtures provide ample outdoor illumination and high visibility. They are an energy-efficient solution for your lighting needs. Perfect for commercial, industrial, roadway, parking lot, and pathway lighting. Long life, LED technology built-in means no bulbs to replace and up to 50,000 hours of maintenance-free service. ETL Listed for wet location installation and DLC Listed for quality and efficiency.

Aluminum Body  
Clear Lens  
Bronze Finish  
70 CRI

Options



See Components list page for detail

Application



#### Photocell

97091-SU Photocell

#### Mounting Hardware

85521-SU Direct Arm  
85523-SU Trunnion Bracket  
85519-SU Slip Fitter  
85518-SU Knuckle Mount  
85522-SU Trunnion Bracket



Direct Arm



Trunnion Bracket



Slip Fitter



Knuckle Mount



Trunnion Bracket

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02856-1	LFX/FL/SCT/30W/MV	30	3900	100-277	30K/40K/50K	50000	WL,DIM,DLC	8.0(h) 5.1(w) 1.7(d)
HD02857-1	LFX/FL/SCT/50W/MV	50	6250	120-277	30K/40K/50K	50000	WL,DIM,DLC	8.5(h) 6.1(w) 1.9(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**



Aluminum Body  
Frosted Lens  
Black Finish  
70 CRI

5  
Year  
Warranty

Application



## LED Outdoor Pole-Top Area Light

### Decorative Design

Sunlite LED Decorative Acorn Pole-Top Fixtures provide ample lighting for outdoor areas while saving energy. Each dimmable fixture has 50 high output LEDs built-in so there are no bulbs to change. They are designed to mount on 3 inch posts (not included). Ideal for use as street lights, in parking lots, urban areas, parks and more. These commercial grade fixtures feature a frosted black finish on the rust-proof aluminum frame and a frosted polycarbonate diffuser. Both are designed to resist the elements for years of maintenance-free service. They are also ETL Listed for wet location installation and DLC Listed for quality and efficiency.



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
49187-SU	LFX/PTL/MW/SCT	25/40/60/80	3250/5200/7800/10400	120-277	30K/40K/50K	50000	WL,DIM,DLC	40.0(w) 18.0(d)

## LED Outdoor Pole-Top Area Light

### Rotatable Design

Sunlite's LED circular pole-top fixtures provide ample lighting for outdoor areas while saving energy. Each dimmable fixture contains 80 high output LEDs that project downward and mount on 3-inch posts (not included). Perfect for parking areas, airports, parks, and more. These commercial grade fixtures feature a frosted bronze finish on the rust-proof aluminum frame and a frosted polycarbonate lens. Both are designed to resist the elements for years of maintenance-free service. They are also UL Listed for wet location installation for quality and efficiency.

Diecast Aluminum Body  
Clear Lens  
Bronze Finish  
80 CRI

Options



See Components list page for detail

Application



Photocell	
85511-SU	MV 3Pin Photocell W/Receptacle

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD02985-1	LFX/PTL/SCT/55W	55	6875	100-277	30K/40K/50K	50000	WL,DIM	20.7(w) 15.0(d)
HD02986-1	LFX/PTL/SCT/75W	75	9375	100-277	30K/40K/50K	50000	WL,DIM	20.7(w) 15.0(d)

## LED Outdoor Parking Lot Area Light

### Outdoor Shoebox Area Light



Die-Cast Aluminum Body  
Clear Lens  
Bronze Finish  
70 CRI

Options

5  
Year  
Warranty



See Components list page for detail

Application



Photocell

85511-SU


MV 3Pin Photocell W/Receptacle

Mounting Hardware Included

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03156-1	LFX/ALF/200W/MV/50K	200	27000	100-277	5000K	50000	WL,DIM	30.0(h) 13.1(w) 6.3(d)

## LED Outdoor Parking Lot Area Light

### Roadway Dusk To Dawn



Sunlite's LED Roadway Light Fixtures are designed to save energy while providing ample outdoor lighting for roadways, parking lots, structures, and more. It can be mounted directly to a wall or attached to an arm mount (included). Built-in photocell for automation dusk-to-dawn operation. Uses only 55 watts of electricity while providing as much light as a 250 watt fixture. ETL Listed for wet location installation and DLC Listed for design and quality.

Die-Cast Aluminum Body  
Polycarbonate Clear Lens  
Dark Bronze Finish  
Built-in Photocell  
80 CRI

5  
Year  
Warranty



Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
49148-SU	LFX/RL/MW/SCT/PC	36/48/60	7500	120-277	30k/40k/50k	50000	WL,DIM,DLC	4.2(h) 7.0(w) 10.4(d)
49149-SU	LFX/RL/HMW/SCT/PC	72/96/120	15000	120-277	30k/40k/50k	50000	WL,DIM,DLC	5.1(h) 9.5(w) 13.5(d)

Sunlite LED Street Light fixtures provide ample outdoor illumination and high visibility. Ideal for commercial, industrial, roadway, parking lot and pathway lighting. Long life, LED technology built-in means no bulbs to replace and up to 50,000 hours of maintenance-free service. ETL Listed for wet location installation and DLC Listed for quality and efficiency.

**Metal Body**  
**Clear Lens**  
**Bronze Finish**  
**70 CRI**

**Options**



**Application**



**LED Outdoor Parking Lot Area Light**  
**Outdoor Shoebox Area Light**

**LED**  
**BUILT-IN**



**Mounting Hardware (Low Output)**

- 85331-SU Trunnion U Bracket
- 85327-SU Adjustable Knuckle Mount
- 85332-SU Wall Installation Box

**Mounting Hardware (High Output)**

- 85335-SU Slip Fitter
- 85337-SU Trunnion U Bracket
- 85336-SU Non Adjustable Arm
- 85338-SU Adjustable Arm

**Photocell**

- 97091-SU Photocell



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> HD02950-1	LFX/STL/20W/MV/50K/T3	20	2200	120-277	5000K	50000	WL,DLC	2.4(h) 7.3(w) 8.5(d)
<b>B</b> 49174-SU	LFX/FL/150W/BRZ/50K	150	18300	120-277	5000K	50000	WL,DLC	7.9(h) 9.5(w) 13.8(d)
<b>C</b> HD02953-1	LFX/STL/200W/MV/50K/T3	200	22873	120-277	5000K	50000	WL,DLC	3.6(h) 13.6(w) 18.8(d)

Upgrade your canopy lights and reduce energy costs with LED fixtures from Sunlite. Ideal for gas station canopies, parking structures, underpasses, security lighting, and more. Wide 120 degree beam for optimal coverage and long 50,000 hour lifespan. Designed for outdoor use with weatherproof aluminum base and polycarbonate lens. With no bulbs to replace, this vandal proof fixture is a maintenance-free lighting solution for commercial and industrial applications.

**Aluminum & Polycarbonate Body**  
**Clear Lens**  
**Bronze Finish**  
**80 CRI**

**Options**



**Application**



**LED Outdoor Parking Garage Canopy Light**

**Square**

**LED**  
**BUILT-IN**



IP66 Rated and protected against heavy seas or powerful jets of water

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03599-1	LFX/MCM/MW/SCT	30/40/60	3900/5200/7800	120-277	30K/40K/50K	50000	DIM,WL,DLC	10.2(h) 10.2(w) 3.4(d)



# LED Commercial UFO High Bay

Premium Design

LED  
BUILT-IN




Die-Cast Aluminum Body  
Clear Lens  
Black Finish  
80 CRI

Options

5  
Year  
Warranty



Application

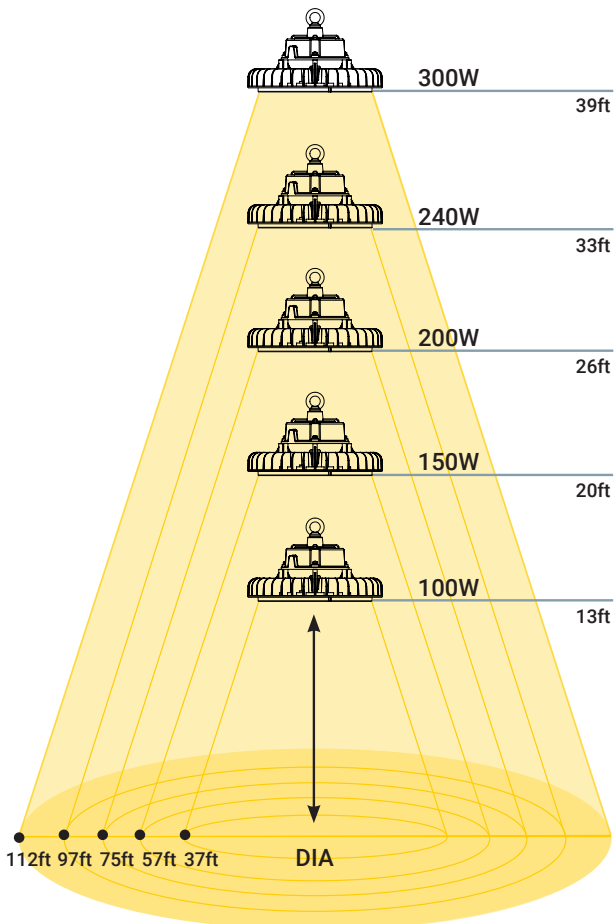

Polycarbonate Reflector



Polycarbonate Lens



Remote Controller



Microwave Motion & PIR Sensor



Emergency Battery Backup

### Compatible with All LED UFO High Bay Models

89693-SU	PCR/LFX/HB Polycarbonate Reflector
89694-SU	PCL/LFX/HB Polycarbonate Lens
89691-SU	RC/LFX/HB Remote Controller
89689-SU	MS/LFX/HB Microwave Motion + PIR Sensor
89690-SU	EM/LFX/HB Emergency Battery Backup

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03603-1	LFX/HB/100W/50K	100	15000	100-277	5000K	50000	WL,DIM,DLC	(W)10.63 (H)10.63 (D)7.09
89685-SU	LFX/HB/150W/50K	150	22500	100-277	5000K	50000	WL,DIM,DLC	(W)10.63 (H)10.63 (D)7.68
89686-SU	LFX/HB/200W/50K	200	30000	100-277	5000K	50000	WL,DIM,DLC	(W)10.63 (H)10.63 (D)7.68
HD03604-1	LFX/HB/240W/50K	240	36000	100-277	5000K	50000	WL,DIM,DLC	(W)13.00 (H)13.00 (D)7.28
HD03606-1	LFX/HB/300W/50K	300	45000	100-277	5000K	50000	WL,DIM,DLC	(W)13.00 (H)13.00 (D)8.66

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**

## LED Commercial Linear High Bay

### Linear Design

LED  
BUILT-IN


LED Linear Commercial High Bay Fixtures from Sunlite are an energy efficient solution to your industrial lighting needs. These dimmable fixtures feature a long 50,000 hour maintenance-free life span. Designed for use in warehouses, commercial garages, workshops, factories, or any indoor industrial environment. UL Listed for damp location installation.



A



V Hook Mount & Chain Included

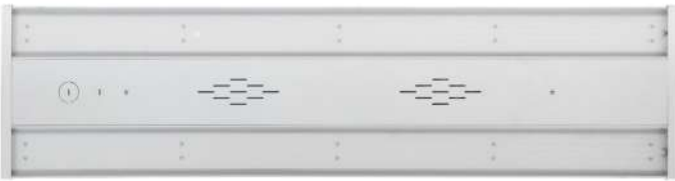

B



Steel & Acrylic Body  
White Lens  
White Finish  
80 CRI

#### Options



See Components list page for detail

#### Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2 FT</b>								
<b>A</b> 89697-SU	LFX/HB/2'/110W/50K	110	14850	100-277	5000K	50000	DL,DIM,DLC	(W)13.60 (H)2.10 (D) 23.68
89695-SU	LFX/HB/2'/160W/50K	160	21600	100-277	5000K	50000	DL,DIM,DLC	(W)11.56 (H)2.10 (D)23.68
<b>4 FT</b>								
<b>B</b> 89696-SU	LFX/HB/4'/220W/50K	220	29700	100-277	5000K	50000	DL,DIM,DLC	(W)13.60 (H)2.10 (D)47.20

## LED Commercial Linear High Bay

### Linear Design

LED  
BUILT-IN



Steel & Acrylic Body  
White Lens  
White Finish  
80 CRI

#### Options




See Components list page for detail

#### Application



#### Mounting Hardware

30571-SU	Pendant Mounting Kit
30572-SU	Surface Mnt Kit- 4L Highbay
30570-SU	V Hook Mount
30580-SU	Wire Guard

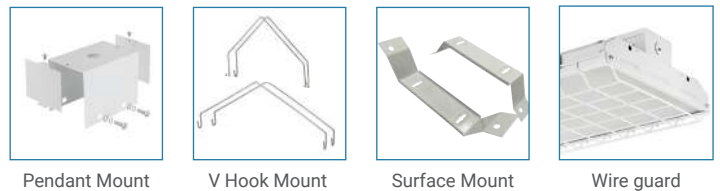

Pendant Mount

V Hook Mount

Surface Mount

Wire guard

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>2 Foot</b>								
HD03109-1	LFX/HB/2FT/13"W/85W/MV/50K/V3	85	11560	100-277	5000K	50000	DL,DIM,DLC	23.8(h) 13.0(w) 3.6(d)
HD03108-1	LFX/HB/2FT/13"W/130W/MV/50K/V3	130	17680	100-277	5000K	50000	DL,DIM,DLC	23.8(h) 13.0(w) 3.6(d)

## Commercial Pendants High Bay

### HID High Bay



**BULB**  
REQUIRED

LED high-bay lighting fixtures last an average of 50,000 hours and must be replaced at their end of life. Sunlite offers several high-bay replaceable bulbs with various beam-spreads and lumen options. No need for purchasing new fixtures, paying for electricians and lifts to change fixtures, replace the bulb. The initial cost is significantly less than integrated LED fixtures and still assures you proper illumination.

Polycarbonate Body  
Mogul (E39) Base  
120/277 Volts  
Lens & Bulbs Sold Separately

Application



Polycarbonate Lens

04828-SU 16" Lens

Item#	Description	Max Watt	Volt	Hours	Features	Dimension(in)
04830-SU	HBFL16PC/P	105	100-277	50000	DL	(W)16.02 (H)23.15

## LED High Lumen Lamps

### High Bay Retrofit ( Bypass Required)



**LED**  
BUILT-IN



120-277 Volts  
Mogul Screw (E39)  
80 CRI



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Finish	Kelvin	Hours	MOL(in)	Features	CTN
HD02879-1	HBR/LED/60W/E39/50K	60	100	7200	120	80	White	5000K	50000	9.05		4
HD03543-1	HBR/LED/60W/E39/50K	60	150	9000	150	80	White	5000K	50000	9.05	DLC	4
HD03542-1	HBR/LED/100W/E39/50K	100	250	15000	150	80	White	5000K	50000	12.05	DLC	4
80873-SU	HBR/LED/140W/E39/50K	140	400	20000	143	80	White	5000K	50000	12.13		4

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB

**sunlite**

Sunlite's Industrial inspired LED fixtures are designed for general purpose applications. Vapor-proof designed to withstand harsh outdoor weather conditions. It's LED technology eliminates the need for frequent lamp replacements, compared to other lighting technologies.

Aluminum Body  
Frosted Glass Lens  
Gray Finish  
80 CRI

5  
Year  
Warranty

Application



## LED VaporProof Wall Mount & Surface Mount

LED  
BUILT-IN



A



B

	Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b>	88144-SU	LFX/VT/14W/50K	14	900	110-277	5000K	50000	WL	9.1(w) 4.3(d)
<b>B</b>	88149-SU	LFX/VTA/14W/50K	14	900	110-277	5000K	50000	WL	9.6(h) 7.4(w) 4.3(d)

Surface Mount  
120 volts  
Medium (E26) Base  
Uses A19 Bulb  
Aluminium Body  
UL Listed - Wet Location

Bulb Suggestion



A19  
Med E26

Application



## Vaporproof Wall Mount & Surface Mount

BULB  
REQUIRED



A



B



C

D

E

F

	Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
<b>A</b>	<b>Surface Mount</b>						
	HD02274-1	VT100 1/2" Pipe	Metallic	Clear Glass	1	100	9.0(w) 4.3(d)
	HD02783-1	VT201 3/4" Pipe	Metallic	Clear Glass	1	200	11.6(w) 5.5(d)
	HD02784-1	VT200 1/2" Pipe	Metallic	Clear Glass	1	200	11.6(w) 5.5(d)
	04950-SU	VT200 3/4 Knock Out	Metallic	Clear Glass	1	200	11.6(w) 5.5(d)
<b>B</b>	<b>Wall Mount</b>						
	HD02273-1	VTA100	Metallic	Clear Glass	1	150	9.5(h) 7.2(w) 4.2(d)
	<b>Colored Replacement Glass</b>						
<b>C</b>	HD02755-1	RPG/LFX/VT/100/B	Blue	Frosted Glass	1	-	6.7(w) 3.4(d)
<b>D</b>	HD02756-1	RPG/LFX/VT/100/G	Green	Frosted Glass	1	-	6.7(w) 3.4(d)
<b>E</b>	HD02757-1	RPG/LFX/VT/100/R	Red	Frosted Glass	1	-	6.7(w) 3.4(d)
<b>F</b>	HD02758-1	RPG/LFX/VT/100/Y	Yellow	Frosted Glass	1	-	6.7(w) 3.4(d)

# LED Construction Work Light

Tripod Stand



Aluminum Body  
Clear Lens  
80 CRI

**5**  
Year  
Warranty

Application

Industrial Commercial Residential



On / Off  
Switch



Foldable Work Light



Foldable



Up/ Down Tilting

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>A</b> HD03176-1	LFX/WL/1H/72W/40K	72	7000	120	4000K	50000	DL	25.4(h) 11.8(w) 5.1(d)
<b>B</b> HD03177-1	LFX/WL/2H/144W/40K	144	14000	120	4000K	50000	DL	25.4(h) 11.8(w) 5.1(d)
<b>C</b> HD02689-1	LFX/WL/30W/W	30	2000	120	4000K	35000	DL	10.7(h) 4.7(w) 8.0(d)

# LED Temporary Construction Work Light

Hanging Mount



Aluminum & Plastic Body  
Cage Lens  
Orange Finish  
80 CRI

**5**  
Year  
Warranty

Application

Industrial Commercial Residential



Wire Guard



Comfort Latch



On / Off  
Remote Control



Linkable

Cable Length:  
Standard: 5'  
60W Option: 20'  
100W Option: 35'  
150W Option: 50'

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>Portable</b>								
HD02562-1	LFX/LED/CC/60W/50K/V2	60	7500	120	5000K	50000	DL	12.1(w) 6.9(d)
HD02719-1	LFX/LED/CC/100W/50K/V2	100	12500	120	5000K	50000	DL	12.6(w) 6.9(d)
HD02720-1	LFX/LED/CC/120W/50K/V2	120	15000	120	5000K	50000	DL	14.8(w) 6.9(d)

Specifications may change without notice.  
We are not responsible for any typographical errors



# Construction String Lights

Commercial-Grade

**BULB**  
REQUIRED



120 volts  
Medium (E26) Base  
Uses A19 Bulb(s)  
Plastic Body  
ETL Listed

### Bulb Suggestion



### Application



Item#	Description	Finish	Gauge	Lights	Max Watts	Dimension
<b>50' Foot</b>						
HD02191-1	EX50-14/2/SL	Yellow	14	5	75	50 FT
04224-SU	EX50-16/2/SL	Yellow	16	5	150	50 FT
<b>100' Foot</b>						
HD02192-1	EX100-14/2/SL	Yellow	14	10	75	100 FT
04227-SU	EX100-16/2/SL	Yellow	16	10	150	100 FT

# LED Emergency Lights

Wall Mount

**LED**  
BUILT-IN

Sunlite's Emergency Lights provide at least 90 minutes during power outages for residential and commercial. Rechargeable NiCd battery is low maintenance, works on either 120 or 277 volts. Suitable for indoor and damp locations. Designed for use in schools, offices, retail stores, restaurants, and hospitals.



Wall Mount  
120/277 volts  
Rechargeable NiCd Battery  
90 Minutes Illumination  
Metal / Plastic Body  
UL Listed



### Application



Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
<b>Standard</b>						
<b>A</b> HD02655-1	EMER/LED/2H	White Two Head	Plastic	2	Back	4.3(h) 10.1(w) 3.5(d)
<b>B</b> HD02559-1	EMER/LED/2H/COM	White Two Head	Plastic	2	Back	3.9(h) 6.3(w) 1.8(d)
<b>NYC Approved</b>						
<b>C</b> 05274-SU	EMER/LED/2H/EM/NYC	White Two Head	Metal	2	Back	10.4(h) 14.5(w) 2.2(d)

# LED Exit Sign & Emergency Lights Combo

2-in-1 Combo





120/277 volts  
Rechargeable NiCd Battery  
90 Minutes Illumination  
Metal / Thermoplastic Housing  
UL Listed



Optional Third Head Included



New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

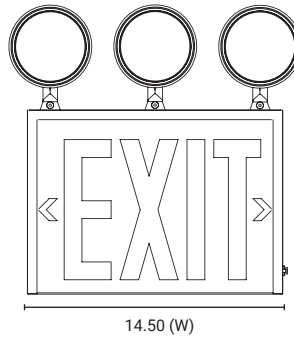

Application





Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
<b>NYC Approved   Metal Body</b>						
05275-SU	EXIT/LED/COMBO/1F/2-3H/EM/NYC	White Single Face	Metal	2 or 3	Back	10.4(h) 14.5(w) 2.2(d)



A



B

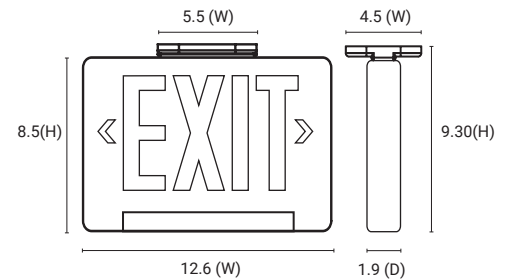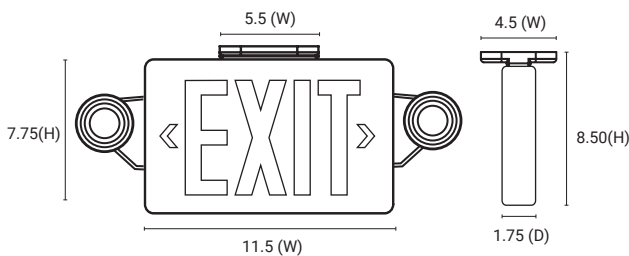

Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
<b>Thermoplastic Housing</b>						
<b>A</b> HD02560-1	EXIT/LED/R/2H/1-2F/COMBO	White One or Two Face	Thermoplastic	2	Back Top	8.5(h) 11.5(w) 1.75(d)
<b>B</b> 04342-SU	EXIT/1/R/W/RC	White One or Two Face	Thermoplastic	1	Back, Top, Side	9.3(h) 12.6(w) 1.9(d)

# LED Exit Sign

Sunlite's exit sign stay illuminated for a least 90 minutes during power outage for residential and commercial. Rechargeable NiCd battery is low maintenance, works on either 120 or 277 volts. Suitable for indoor and damp locations. Designed for use in schools, offices, retail stores, restaurants, and hospitals.



120 /277 volts  
 Rechargeable NiCd Battery  
 90 Minutes Illumination  
 Metal / Thermoplastic Housing  
 UL Listed

**Battery Backup**



Application: Hospitality, Office, Retail, Commercial




**A** Thermoplastic Housing (Fire Resistant)



**B** Metal Housing (Fire Resistant)

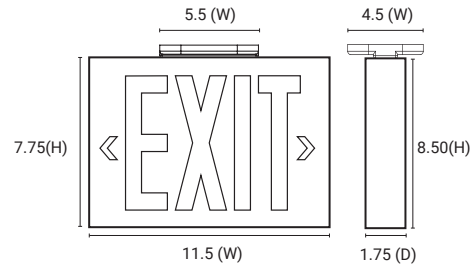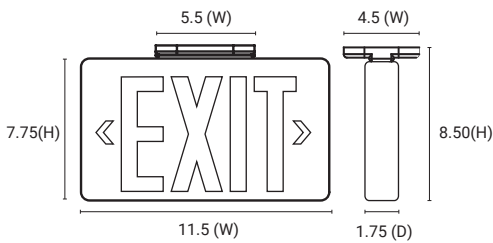

Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
<b>A</b> HD02561-1	EXIT/LED/R/EM/1-2F <b>NYC Approved</b>	White One or Two Face	Thermoplastic	1	Back, Top, Side	8.5(h) 11.5(w) 1.75(d)
<b>B</b> 05276-SU	EXIT/LED/1-2F/EM/NYC	Clear One or Two Face	Metal	1	Back, Top, Side	8.5(h) 11.5(w) 1.75(d)




### Back Mount

Back mount installation typically have a knock-out pattern on the backplate to mount directly to the junction box.




### Side Mount

Side mounting installation requires the use of a mounting canopy. The canopy is affixed to the side of the unit and then attached to the wall. Use of side mount for exit signage may require double face.



### Top Mount

Top mount installation requires using a mounting canopy from the top of the fixture. Use of ceiling mount for exit signage may require double face.

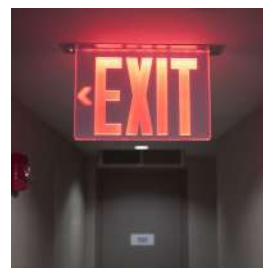

### Recessed Mount

Recessed mount installation is for housing is located above the ceiling. Some units may further specify drop ceiling/new construction or sheetrock/remodel applications.

## LED Exit Sign

### Edge Lite





New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.



120 / 277 volts  
Rechargeable NiCd Battery  
90 Minutes Illumination  
UL Listed



#### Application

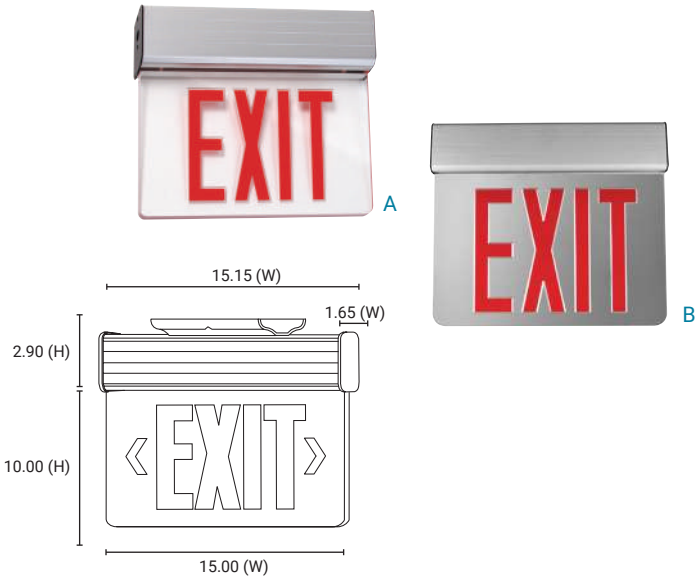

Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
<b>NYC Approved</b>						
<b>A</b> 05277-SU	EXIT/LED/EDGE/SU/1F/WH/CL/EM/NYC	Clear One Face	Acrylic & Metal	1	Top, Side	12.9(h) 15.15(w) 1.65(d)
<b>B</b> 05278-SU	EXIT/LED/EDGE/SU/2F/WH/MI/EM/NYC	Mirror Aluminum Two Face	Acrylic & Metal	1	Top, Side	12.9(h) 15.15(w) 1.65(d)

## Exit Sign

### Edge Lit & Recessed Mount





New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

120 / 277 volts  
Rechargeable NiCd Battery  
90 Minutes Illumination  
UL Listed



#### Application

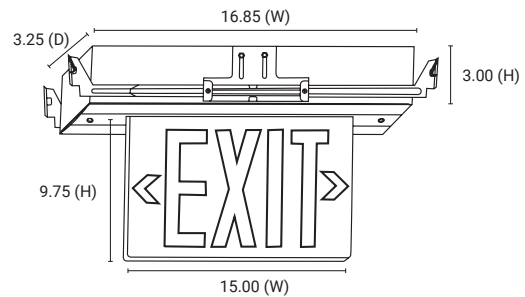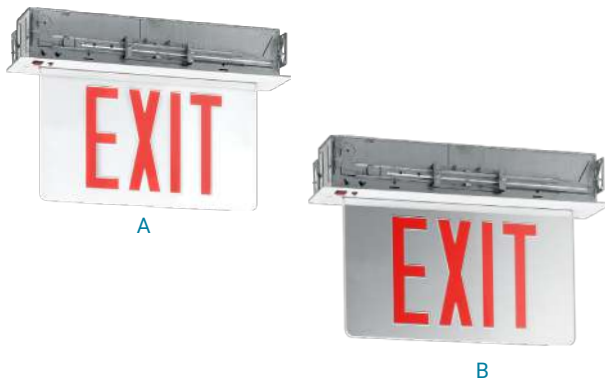

Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
<b>NYC Approved</b>						
<b>A</b> 04326-SU	EXIT/EDGE/RC/2RF/MI/AL/EM/NYC	Clear Two Face	Acrylic & Metal	1	Recessed	12.75(h) 16.85(w) 3.25(d)
<b>B</b> 04325-SU	EXIT/EDGE/RC/1RF/CL/AL/EM/NYC	Mirror One Face	Acrylic & Metal	1	Recessed	12.75(h) 16.85(w) 3.25(d)

Specifications may change without notice.  
We are not responsible for any typographical errors

SUNLITE.COM

CALL 718.768.7000

TOLL-FREE 800.605.BULB


**sunlite**

Sunlite's LED light engines allow you to convert your existing light fixtures into state of the art LED fixtures. Take advantage of their high lumen output and energy saving LEDs while producing an even light spread. The Sunlite LED light engines are suitable for most fixtures and are available in a wide range of sizes and color temperatures.

Metal & Plastic Body  
Clear Lens  
White Finish  
90 CRI


3  
Year  
Warranty

Application

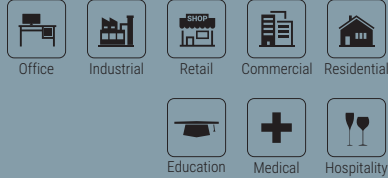

## LED Flush Mount Circular Module Retrofit Kit

AC Light Engine

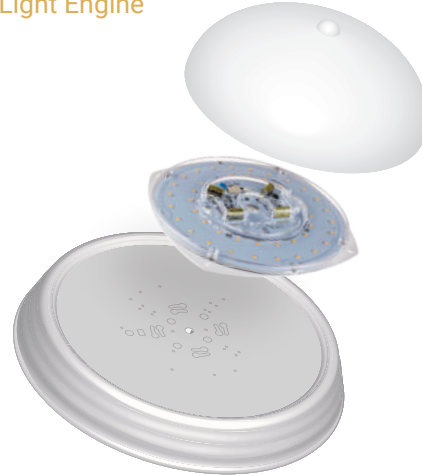

3" | 700 Lumens



4" | 1100 Lumens



6" | 1600 Lumens



7" | 2100 Lumens

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>3"</b>								
88478-SU	MODULE/LED/3"/10W/30K/D/AC	10	700	120	3000K	25000	DL,DIM,ES	0.8(h) 3.3(w) 3.3(d)
88482-SU	MODULE/LED/3"/10W/40K/D/AC	10	700	120	5000K	25000	DL,DIM,ES	0.8(h) 3.3(w) 3.3(d)
88480-SU	MODULE/LED/3"/10W/50K/D/AC	10	700	120	5000K	25000	DL,DIM,ES	0.8(h) 3.3(w) 3.3(d)
<b>4"</b>								
88476-SU	MODULE/LED/4"/17W/5SCT	17	1050	120	27K/30K40K/50K	25000	DL,DIM	0.8(h) 4.4(w) 4.4(d)
<b>5" and 5.5"</b>								
88281-SU	MODULE/LED/5"/20W/SCT/AC	20	2000	120	27K/30K40K/50K/65K	50000	DL,DIM	5.0(d)
88467-SU	MODULE/LED/5.5"/23W/27K/E/D/AC	23	1600	120	2700K	25000	DL,DIM,ES	0.6(h) 5.8(w) 5.8(d)
88468-SU	MODULE/LED/5.5"/23W/30K/E/D/AC	23	1600	120	3000K	25000	DL,DIM,ES	0.6(h) 5.8(w) 5.8(d)
<b>6.3"</b>								
88479-SU	MODULE/LED/6.3"/15W/SCT	15	1350	120	30K/40K/50K	50000	DL,DIM	0.55(h) 7.3(w) 7.3(d)
<b>6.5"</b>								
88282-SU	MODULE/LED/6.5"/25W/SCT/AC	25	2500	120	27K/30K40K/50K/65K	50000	DL,DIM	6.5(d)
88283-SU	MODULE/LED/6.5"/30W/SCT/AC	30	3000	120	27K/30K40K/50K/65K	50000	DL,DIM	6.5(d)
<b>7"</b>								
88471-SU	MODULE/LED/7"/28W/27K/E/D/AC	28	2100	120	2700K	25000	DL,DIM,ES	0.6(h) 7.4(w) 7.4(d)
88472-SU	MODULE/LED/7"/28W/30K/E/D/AC	28	2100	120	3000K	25000	DL,DIM,ES	0.6(h) 7.4(w) 7.4(d)
88414-SU	MODULE/LED/7"/30W/30K/AC/HL	30	3000	200	3000K	50000	DL,DIM,ES	0.6(h) 7.4(w) 7.4(d)



# Bezel Lights

## Flexible LED Tape Strip Light



Plastic Strip  
80 CRI

2  
Year  
Warranty

Application



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
<b>Single Strips</b>								
80985-SU	BZL/110W/24V/D/30K/600LED/SINGLE	110	1900	24	3000K	50000	DIM	
80986-SU	BZL/110W/24V/D/40K/600LED/SINGLE	110	2000	24	4000K	50000	DIM	
<b>Single Strips</b>								
80991-SU	BZL/100W/24V/D/30K/1400LED/SINGLE	100	1700	24	3000K	50000	DIM	
80992-SU	BZL/100W/24V/D/40K/1400LED/SINGLE	100	1800	24	4000K-4500K	50000	DIM	
<b>Double Strips</b>								
80987-SU	BZL/140W/24V/D/30K/DOUBLE	140	3000	24	3000K-3500K	50000	DIM	
80988-SU	BZL/140W/24V/D/40K/DOUBLE	140	3100	24	4000K-4500K	50000	DIM	
<b>Triple Strips</b>								
80989-SU	BZL/180W/24V/D/30K/TRIPLE	180	3500	24	3000K-3500K	50000	DIM	
80990-SU	BZL/180W/24V/D/40K/TRIPLE	180	3600	24	4000K-4500K	50000	DIM	
<b>RGB</b>								
80927-SU	BZL/144/12V/D/RGB	144		12	RGB	50000	DIM	



Driver



RGB Touch Controller



Double End No Wire Connector



L Shape Connector



DC Female Jacket Connector



Single Pigtail Wire Connector



Double End Wire Connector



T Shape Connector



X Shape Connector



60404-SU

60402-SU

60400-SU

60401-SU

Extrusion

### Drivers

80920-SU	BZL/RGB/RC1
80975-SU	BZL/288W/24V/3-CHANNEL
80972-SU	BZL/120W/24V
80973-SU	BZL/150W/24V
80974-SU	BZL/12-24V/18Amp/3-CHANNEL
80993-SU	BZL/S150W/24V
80994-SU	BZL/S350W/24V
80916-SU	BZL/F100W/12V
80932-SU	BZL/F200W/12V
80970-SU	BZL/DC Female Connector

### 10mm Connectors

80979-SU	BZL/BC/SW/10MM
80981-SU	BZL/BC/SW/10MM
80962-SU	BZL/BC/DW/10MM
80980-SU	BZL/BC/10MM
80952-SU	BZL/BC/T/72W/10MM
80976-SU	BZL/BC/L/10MM
80977-SU	BZL/BC/T/10MM

### 10mm RGB Connectors

80964-SU	BZL/BC/DW/10MM/RGB
80953-SU	BZL/BC/T/72W/10MM/RGB
80901-SU	BZL/WP/72W/12V/D/W
80909-SU	Rubber Mount For Water Proof

### 20mm Connectors

80955-SU	BZL/BC/D/20MM
80963-SU	BZL/BC/DW/20MM
80959-SU	BZL/BC/SW/20MM
<b>20mm RGB Connectors</b>	
80957-SU	BZL/BC/D/20MM/RGB
80961-SU	BZL/BC/SW/20MM/RGB
80965-SU	BZL/BC/DW/20MM/RGB

### Extrusions

60404-SU	AES/6.5'L
60402-SU	AES/6.5'L/0.3D/0.6W
60401-SU	AES/6.5'L/0.6D/0.6W
60400-SU	AES/6.5'L/0.6D/0.6W



Plastic Body  
 4 Different Cover Options  
 4 Different Color Options  
 IP67 Rated  
 80 CRI

3  
 Year  
 Warranty

Application

Education	Medical	Hospitality	Office	Industrial	Commercial	Residential

## LED Step Light

Outdoor / Indoor



This LED decorative step light is designed to work with a variety of decorative covers for horizontal or vertical mounting. It is IP67 rated and designed to be installed in standard 2x4 single gang boxes.



IP67 Rated Water Resistant

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88920-MKS	MKS/SL/30K	2	35	120	3000K	25000	WL	4.7(h) 2.9(w) 1.7(d)

Scoop	Color	
88944-MKS	MKS/SL/SC/BK	Black
88945-MKS	MKS/SL/SC/BN	Brushed Nickel
88946-MKS	MKS/SL/SC/ORB	Oil Rubbed Bronze
88943-MKS	MKS/SL/SC/WH	White



Horizontal Louver	Color	
88938-MKS	MKS/SL/HLV/BK	Black
88939-MKS	MKS/SL/HLV/BN	Brushed Nickel
88940-MKS	MKS/SL/HLV/ORB	Oil Rubbed Bronze
88937-MKS	MKS/SL/HLV/WH	White



Flat	Color	
88926-MKS	MKS/SL/FL/BK	Black
88927-MKS	MKS/SL/FL/BN	Brushed Nickel
88928-MKS	MKS/SL/FL/ORB	Oil Rubbed Bronze
88925-MKS	MKS/SL/FL/WH	White



Vertical Louver	Color	
88932-MKS	MKS/SL/VLV/BK	Black
88933-MKS	MKS/SL/VLV/BN	Brushed Nickel
88934-MKS	MKS/SL/VLV/ORB	Oil Rubbed Bronze
88931-MKS	MKS/SL/VLV/WH	White



Aluminum Body  
 Frosted Lens  
 White Finish  
 80 CRI

5  
 Year  
 Warranty

Application

Education	Medical	Hospitality	Office	Industrial	Commercial	Residential

## LED Step Light

Fixture With Trim



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
HD03046-1	LFX/SL/H/3W/W/30K	3.5	120	120	3000K	50000	DL	3.0(h) 2.0(w) 5.0(d)

# Replacement Lenses



04550-SU | RPG/112/WH



04964-SU | RPG/AM22/CL



04969-SU | RPG/AM22/RB/FR



04384-SU | RPG/AM22/WH



04387-SU | RPG/AM22/WH



04963-SU | RPG/AM32/54/CL



04418-SU | RPG/AM32/54/WH



04560-SU | RPG/B12/WH



04585-SU | RPG/D13/AL



04583-SU | RPG/D13/FR



04346-SU | RPG/DG11/AL



04576-SU | RPG/DG11/AL



04573-SU | RPG/DG11/CL



04575-SU | RPG/DG11/FR



04915-SU | RPG/FIX/FM



04939-SU | RPG/FIX/SM



04959-SU | RPG/FIX/SQ



04953-SU | RPG/FIX/VF/CONE



04955-SU | RPG/FIX/VF/CYLINDER



04957-SU | RPG/FIX/VF/SQUARE



04466-SU | RPG/GLO6/AL



04469-SU | RPG/GLO6/WH



04480-SU | RPG/GLO8/WH



07693-SU | RPG/HALL8/WH

## Replacement Lenses



05777-SU RPG/LFX/AM/12"  
05781-SU RPG/LFX/AM/14"



05780-SU RPG/LFX/DBN13/AL/13"



05779-SU RPG/LFX/DBN13/FR/13"



05784-SU RPG/LFX/DBN15/AL/15"



05783-SU RPG/LFX/DBN15/FR/15"



05775-SU RPG/LFX/DC012/12"  
05785-SU RPG/LFX/DC016/16"  
05787-SU RPG/LFX/DC018/18"



04382-SU RPG/LFX/DC032/



05771-SU RPG/LFX/EC/2FT  
05797-SU RPG/LFX/EC/2FT  
05795-SU RPG/LFX/EC/4FT  
05592-SU RPG/LFX/EC/4FT  
05772-SU RPG/LFX/EC/8FT



05776-SU RPG/LFX/HM/12"



05796-SU RPG/LFX/R/GL



05761-SU RPG/LFX/S/GL



04505-SU RPG/PIN/CL



A



B



C



D



E

A HD02755-1 RPG/LFX/VT/100/B  
B HD02756-1 RPG/LFX/VT/100/G  
C HD02757-1 RPG/LFX/VT/100/R  
D HD02758-1 RPG/LFX/VT/100/Y  
E 04526-SU RPG/VT/100/CL  
04527-SU RPG/VT/200/CL

